



Cyfin[®] Proxy

User Manual for Version 7.8.x

Table of Contents

Introduction	1
1.0 Get Started	3
1.1 Download and Install the Product	4
1.2 Change the Default Password	5
1.3 Set up Memory Settings	6
1.4 Configure Users' Browsers	7
1.4.1 Configure All Users' Browsers in IE	7
1.4.2 Configure a Single User's Browser in IE	8
1.4.3 Configure a Single User's Browser in Firefox	10
1.4.4 Prevent Users from Changing Browser Settings	11
1.4.4.1 Disable IE's Connection Option	11
1.4.4.2 Create a Firewall Rule	12
1.5 Configure Authentication	13
1.6 Download the URL List	14
1.7 Set up Administrator Email	15
1.8 Generate Some Logfiles	16
1.9 Run the Real Time Monitor Report	17
1.10 Create and Run a Site Analysis Report	18
2.0 Groups and IDs	20
2.1 Required Setup	21
2.2 Import Groups and IDs	22
2.2.1 Import from Active Directory	22
2.2.2 Import a Text File	26
2.3 Add Groups and IDs	28
2.3.1 Add a Group	28
2.3.2 Add an ID	30
2.4 Edit Groups and IDs	32
2.4.1 Delete	32
2.4.2 Move	33
2.4.3 Modify	34
2.5 Find an ID	36

3.0 Data Management	37
3.1 Logfile Data	39
3.1.1 Set up the Logfile Directory	39
3.1.2 View Logfile Data	40
3.2 Wavecrest Database	41
3.2.1 Required Setup	41
3.2.2 Import Logfile Data	42
3.2.2.1 Import Options	42
3.2.2.2 Manual Import	43
3.2.2.3 Scheduled Import	44
3.2.3 View Data	45
3.2.4 Export Data	46
3.2.5 Delete Data	48
3.2.5.1 Manually Delete Data	48
3.2.5.2 Schedule Automatic Data Deletion	49
4.0 Web Policy Support	50
4.1 Classify Categories	51
4.2 Custom Categories	52
4.3 Edit URLs in Categories	54
4.4 Abuse Thresholds	55
5.0 Reporting	58
5.1 Set Report Preferences	59
5.1.1 Language Settings	59
5.1.2 Custom Header	59
5.1.3 Display Categories	60
5.1.4 Filename Format	61
5.1.5 Interactive Reports	61
5.1.6 Maximum IDs	62
5.1.7 Report Style	63
5.2 Run a Real Time Monitor Report	64

5.3 Run a High-level Summary Report	67
5.4 Run a Detail Audit Report	69
5.5 Run a Site Analysis Bandwidth Report	71
5.6 Schedule Reports	73
5.6.1 Modify Scheduled Reports	74
5.6.2 Delete Scheduled Reports	74
5.7 Using Interactive Reports	75
5.8 Review Report Policies	77
6.0 Administrative Features	78
6.1 Create Administrator and Operator Accounts	79
6.2 Modify Administrator and Operator Accounts	80
6.3 Delete Administrator and Operator Accounts	81
6.4 Download the URL List	82
6.4.1 Manual Download	82
6.4.2 Schedule Download	83
6.5 Download Product Updates	84
6.6 Check Product News	85
6.7 Setup and Manage an Array	86
7.0 Other Features	88
7.1 Quick Start	88
7.2 License	88
7.3 Job Queue	89
7.4 Help	90
7.4.1 Documentation	90
7.4.2 Profiling	90
7.4.3 Support Forum	90
7.4.4 System Information	90
7.4.4.1 System Status	90
7.4.4.2 Server Information	91
7.4.4.3 Check URL	91
7.4.4.4 Sample Reports	91
7.4.5 About	91

Appendix A: Groups and IDs 92

Appendix B: Report Descriptions 98

Appendix C: Glossary of Terms 101

Introduction

Welcome to the Administrative Manual for Cyfin Proxy. Cyfin Proxy is a standalone proxy server that monitors and reports on employees' Web use. This manual covers detailed instructions for all of Cyfin Proxy's features. It is up to you (the administrator) whether you want to use the basic or advanced functionality of Cyfin's features.

If you have an earlier version of the product, it is recommended that you update to the latest version. However, if you are not quite ready to update, and depending on how long ago it has been since your last update, many instructions covered in this manual may still apply to your version of the product.

Structure and Use

The manual is structured in the order that is recommended for setting up the features. However, you can always start with using the basic setup of the product covered in the Get Started section of the manual and later use the more advanced features when you are ready. With the exception of a few sections that have a required setup screen, you do not have to read each section from beginning to end. You are welcome to skip around to find instructions for the features that are important for your organization's use. Some of the key things you will find instructions for in this manual are how to:

- Run summarized and detailed reports
- Classify categories based on your company's Internet usage policy
- Set abuse thresholds
- Increase reporting speed with the optional internal database.

You will find that there are numbered step-by-step instructions with screen shots for each process. The instructions will guide you through the menu and the screens. You will find menu options listed like the example below:

Advanced Settings – Groups and IDs

Throughout the manual, you will also see a number of "Notes" and "Cautions" imbedded with the instructions. Pay close attention to these, as they usually contain important exceptions to the instructions. "Cautions" will apply to everyone, but "Notes" may or may not apply depending on your network and/or how you plan to use the features.

Organization for this Manual

Section 1: Get Started

This section covers all the basic setup steps you need to complete to get the product up and running. This includes installing the product, configuring your browser, downloading the URL list, and running reports.

Section 2: Groups and IDs

In this section, you will learn about the product's core grouping structure and the several ways that you can use grouping. This includes importing Groups and IDs from Active Directory or a text file, setting up scheduled imports, and manually adding your Groups and IDs. Even if you do not want to use grouping, you will want to read the Introduction to this section as you will still need to understand the core grouping structure and how to import or add IDs.

Section 3: Data Management

The reporting feature of this product is dependent on the logfiles. This section covers instructions on viewing your logfiles and managing the product's internal database, i.e., the Data Manager. The Data Manager compresses the logfiles into XML format allowing for faster reporting and long-term storage. The data can be exported to other applications.

Section 4: Web Policy Support

Wavecrest's products were built with customizable Web policy support settings to fit any organization's needs. This section will walk you through classifying categories, creating custom categories, and setting abuse threshold policies.

Section 5: Reporting

There are several, customizable reports available in the product and the option to use Interactive or Read-only reports. Interactive reports allow you to drill down from a higher level report to get more detailed Web-use data. This section shows you how to create high and low-level reports, schedule reports to run automatically, use interactive reporting, and set report preferences.

Section 6: Administrative Features

This section contains instructions on various other administrative features, including how to create administrator and operator accounts, scheduling the download of the URL list, and downloading product updates.

Section 7: Other Features

This section briefly discusses some of the other product screens that do not need a lot of instruction, but can be helpful. These include the job queue and help screens.

Where To Start

If you have just downloaded or installed the product, you will want to get started with Section 1: Get Started. Otherwise, feel free to browse the manual until you find the instructions that you need.

 Additional help for the product screens is also available in the product. Just click on this icon in the upper right hand corner of the interface. A window will then pop up with information about the screen and instructions on how to use it.

If you ever need additional help beyond what is available in the manual or the product, please feel free to contact our technical support team.

Contact Information	
Telephone Numbers	
Toll-Free	877-442-9346 ex. 4 (U.S. and Canada).
Direct	321-953-5351 ex. 4
International	001-321-953-5351 ex. 4 (outside U.S. and Canada)
Email	
Technical Support	support@wavecrest.net
General Info	info@wavecrest.net
User Forum	
Forum	http://forum.wavecrest.net

1.0 Get Started

This section gives instructions for getting the product up and running. It involves the following simple steps:

- **Download and Install the Product** - A wizard will guide you through the process.
- **Change the Default Password** - Change the Administrator password.
- **Set up Memory Settings** - Select the amount of memory needed.
- **Configure Users' Browsers** - Browsers must be set to go through the proxy.
- **Configure Authentication** - Specify if login names will primarily be used.
- **Download the URL List** - Complete this step so that you can run reports.
- **Set up Administrator Email** - Receive reports and status updates via email.
- **Generate Some Logfiles** - Surf the Internet in order to create some logfiles.
- **Run the Real Time Monitor Report** - View Internet activity live.
- **Create and Run a Site Analysis Report** - Create a high-level summary report; one that is useful for identifying suspect areas.

Be sure to complete these steps before moving on to any other sections in this manual. Many of these steps are mandatory to get the product up and running properly.

1.1 Download and Install the Product

In this step you will download and start a wizard to install the product.

1. Double-click on the executable file and simply follow the wizard's onscreen instructions.
2. After a few clicks you will find yourself at the login screen shown below.

The image shows the login screen for Cyfin Proxy. The top half has a blue background with the text "Cyfin® Proxy" and "Accurate monitoring solutions" in white. Below this, there are two input fields: "Login" with the text "admin" and "Password" with the text "*****". A "Submit" button is located below the password field. The bottom half of the screen is white and contains the text "Please enter proper credentials." on the left and the "WAVECREST COMPUTING" logo on the right. The logo consists of a stylized blue wave above the words "WAVECREST" and "COMPUTING" in black capital letters.

Cyfin® Proxy
Accurate monitoring solutions

Login admin
Password *****
Submit

Please enter proper credentials.

WAVECREST
COMPUTING

3. Log into the product using the following default credentials:
LOGIN: admin
PASSWORD: password

NOTE: If the login screen does not appear, bring it up by going to **Start - Programs - Cyfin - Browser Interface**.

1.2 Change the Default Password

Once you have logged into the product, you will want to change the default password.

1. Go to **Administration - Access Accounts** and click on the **Modify** link.
2. Click on the **admin(Administrator)** link.

Administration - Access Accounts - Modify - Properties

Modify Properties

Account Name: admin

Password:

Account Type: Administrator

Full Name: Administrator

Email Address: first.last@company.com

Home Directory: C:\TEMP **Browse**

Groups:

- Enterprise (24585)
 - Engineering (4)
 - Marketing (5)
 - Sales (1)
 - Ungrouped IDs (24575)
 - VIP (0)

Submit **Reset**

3. Type in your new password in the **Password** field
4. At this time, you can also change the **Full Name**, **Email Address**, and **Home Directory**. Reports will be sent to the **Email Address** specified and saved to the **Home Directory** specified on this screen.
5. When you have finished making your changes, click **Submit**.

1.3 Set up Memory Settings

You must configure the maximum amount of memory that the product will use to perform its operations. The Memory setting helps optimize overall system performance and precludes unnecessary degradation of system speed. The default setting and recommended minimum is 256 MB RAM. If you start to meet your memory threshold, the product will notify you to increase your memory setting.

NOTE: For optimal performance, we recommend that you choose the setting that is approximately half of your available memory (RAM).

1. To set your memory, go to **Setup** on the menu and then click the **Memory** link.

Setup - Memory

Memory Settings

Please set this product's virtual memory to one of the following selections.

Max Memory

- ☒ 256 MB
- ☐ 384 MB
- ☐ 512 MB
- ☐ 768 MB
- ☐ 1 GB
- ☐ 1.25 GB

For the product to run at optimal performance, please select the memory setting that is approximately half of the available memory (RAM). If you find that jobs fail to complete, increase this memory setting.

Note: For these changes to take effect, you will have to restart the **Cyfin Service** after hitting the **Submit** button.


2. Check the radio button (in the "**Choice**" column) that corresponds to the appropriate amount of memory to be used, keeping in mind your available RAM.
3. Click **Submit** to apply changes, or click **Reset** to reload previous values.
4. After you click Submit, you will receive a popup asking whether you would like to restart the service. Your memory setting changes will not take affect until you restart the service.

1.4 Configure Users' Browsers


Your monitored users' browsers must be configured to go through the proxy. There are a few ways to accomplish this task and a couple of things you can do to ensure that users do not change their browser settings. For Internet Explorer, it is possible to change IE settings for all users in your domain in one step, or you can choose to change each user's IE settings individually. For Firefox, you can only change each user's browser settings individually.

You need to know the IP address of the server that the product is installed on before you begin configuring browsers. Instructions on how to find the IP address are below.

1. On the machine that the product is installed on, go to **Start - Run** and type in "cmd" (no quotes), and click **OK**.

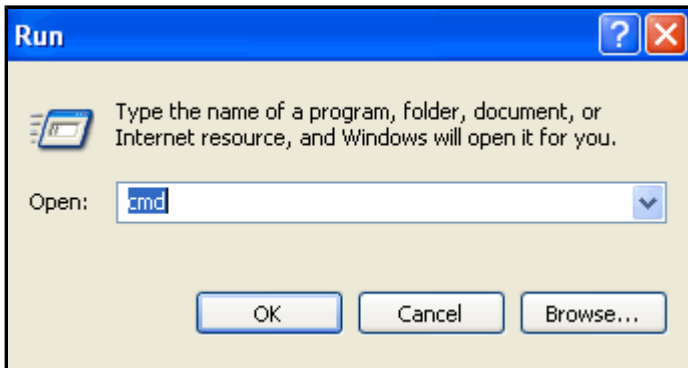

2. In the command prompt window, type "ipconfig" (no quotes), and hit **Enter**. You will see the pc's IP address, along with other information.

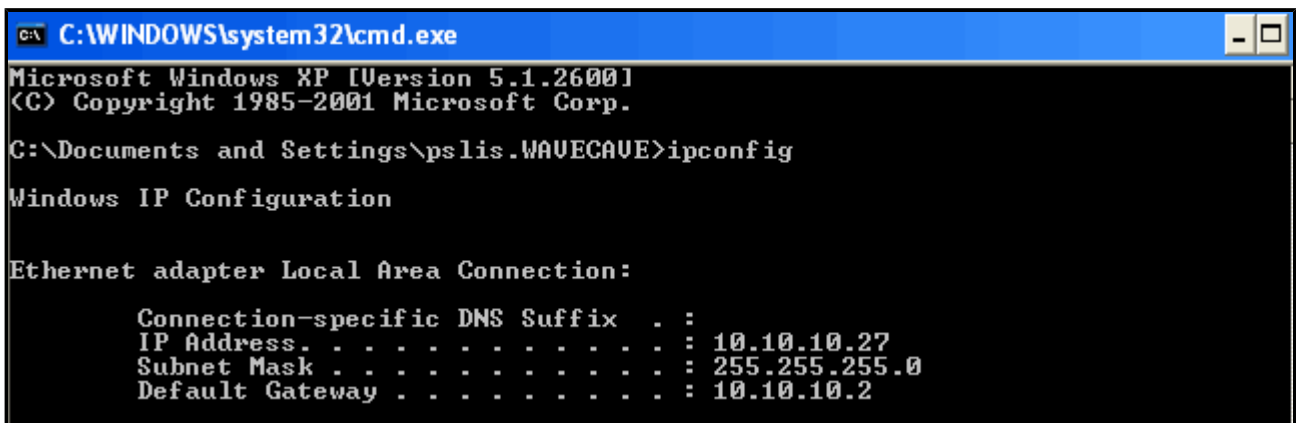

3. Take note of the IP address displayed. You need it to configure users' Internet browsers.

NOTE: The directory shown in the CMD prompt window above is just an example. Your directory will probably be slightly different, and that is okay.

1.4.1 Configure All Users' Browsers in Internet Explorer

These instructions will step you through defining IE settings for all users in your domain.

NOTE: These instructions apply only to **Internet Explorer** browsers in an Active Directory domain.


1. Go to **Programs - Administrative Tools** on your Domain Controller computer.
2. Open **Active Directory Users and Computers**.
3. Right-click on the root of the domain and select **Properties**.
4. Select the **Group Policy** tab and click **Edit** for the **Default Domain Policy** GPO.
5. Go to **User Configuration - Windows Settings - Internet Explorer Maintenance**.

6. Open the **Connection** folder.
7. Right-click on **Proxy Settings** and go to **Properties**.
8. Check the **Enable Proxy Configuration** checkbox.
9. Fill in the IP address or computer name of the proxy machine.
10. Apply your changes, and the next time users open IE, they should be going through the proxy.


NOTE: *If you are in an Active Directory domain but have difficulty changing these settings, please contact Wavecrest Support at 321-953-5351, ext. 4 or support@wavecrest.net for assistance.*

1.4.2 Configure a Single User's Browser in Internet Explorer

1. Begin by opening your Internet Explorer browser.
2. Click on the **Tools** menu. Then, click on **Internet Options**. The following screen will appear.

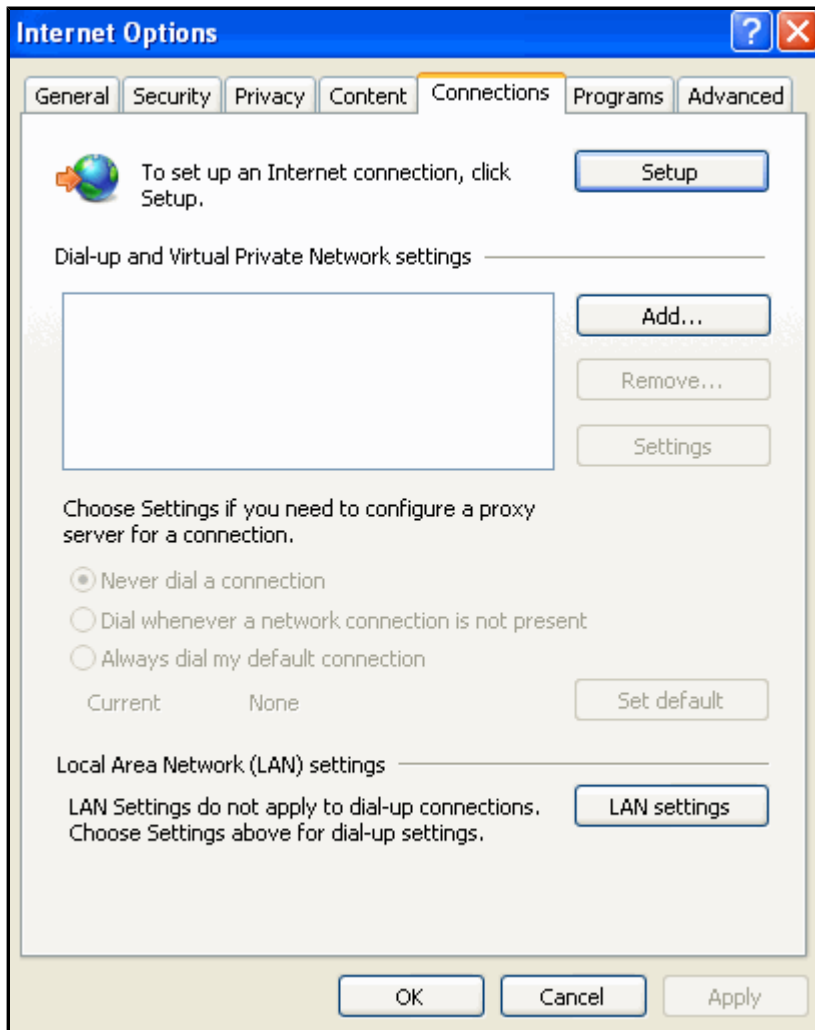

3. Next, click on the **Connections** tab and then the **LAN Settings** button.

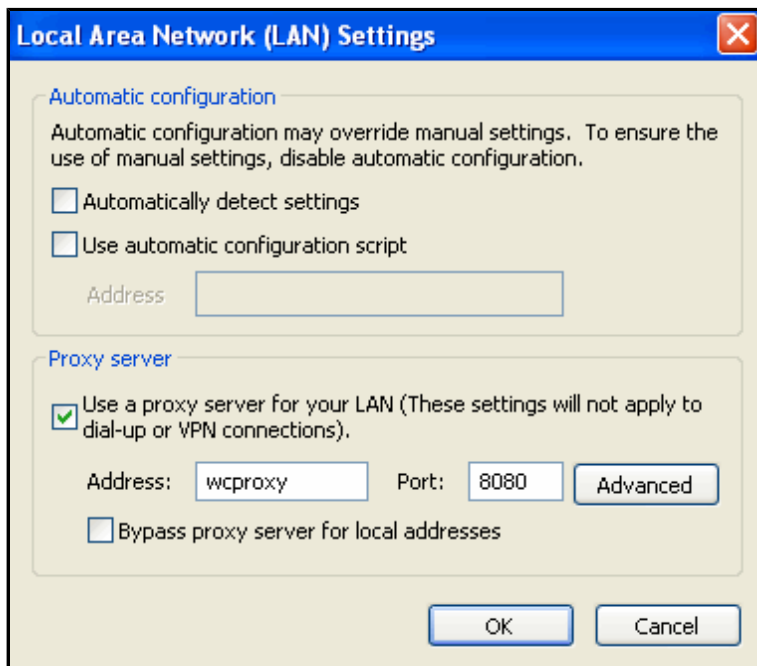

Local Area Network (LAN) Settings

Automatic configuration

Automatic configuration may override manual settings. To ensure the use of manual settings, disable automatic configuration.

☐ Automatically detect settings

☐ Use automatic configuration script

Address:


Proxy server

☒ Use a proxy server for your LAN (These settings will not apply to dial-up or VPN connections).

Address: Port:

☐ Bypass proxy server for local addresses

4. In the LAN Settings, check the box in the Proxy Server section that says "Use a Proxy Server...".
5. Uncheck any other boxes on this screen.
6. In the **Address** field, type in the IP Address or computer name of the machine the product is installed on.
7. If possible, leave the **Port** box alone with the default port of 8080.
8. If you click on the **Advanced** button next to the **Port** box, you should see that HTTP traffic is now being routed through the machine you just specified. (There should be no reason to modify this screen.)

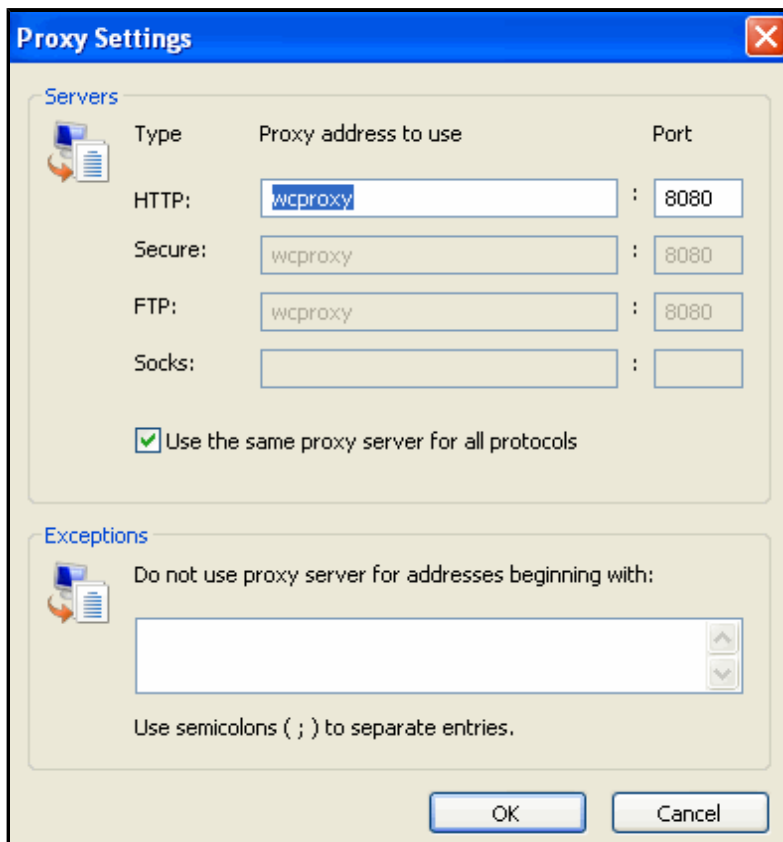

Proxy Settings

Servers

Type	Proxy address to use	Port
HTTP:	wproxy	8080
Secure:	wproxy	8080
FTP:	wproxy	8080
Socks:		

☒ Use the same proxy server for all protocols

Exceptions


Do not use proxy server for addresses beginning with:

Use semicolons (;) to separate entries.


9. Click **OK** to close any open dialogue screens; doing so will save your new proxy configuration.

1.4.3 Configure A Single User's Browser in Mozilla Firefox

1. Begin by opening your Mozilla Firefox browser.
2. Click on the **Tools** menu, then click on **Options**.

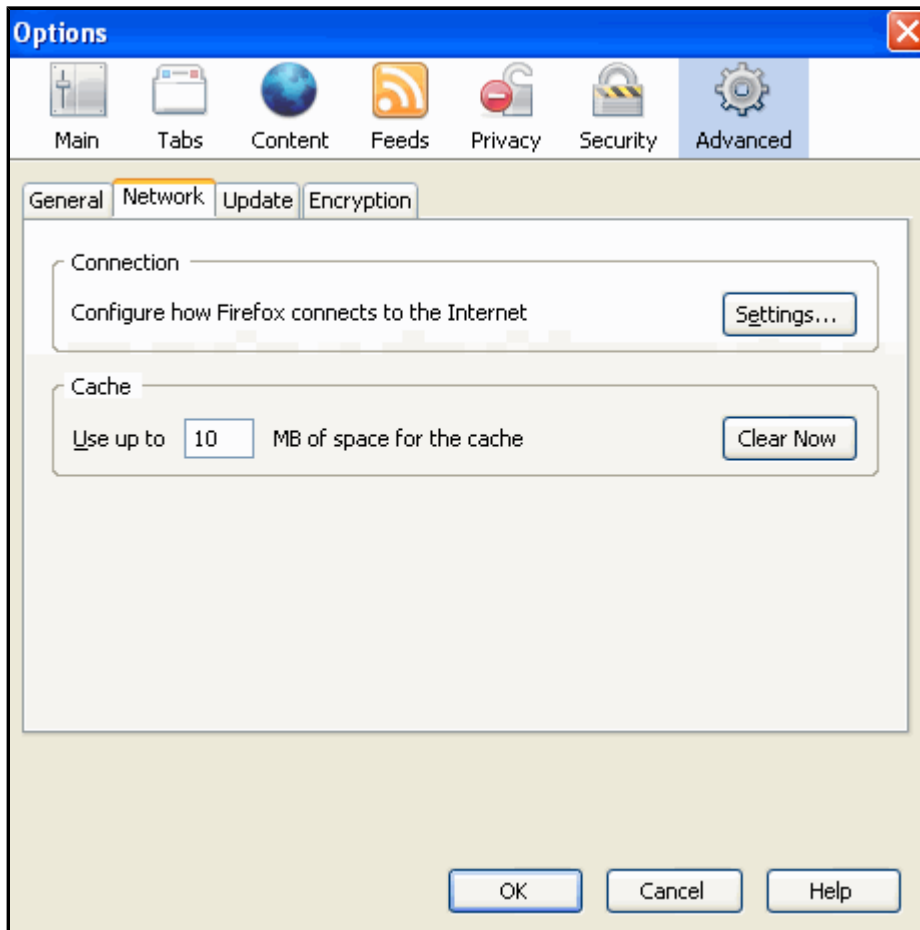

3. Make sure that the **Advanced** icon is selected. Then click on the **Network** tab and click on the **Settings** button under **Connection**.

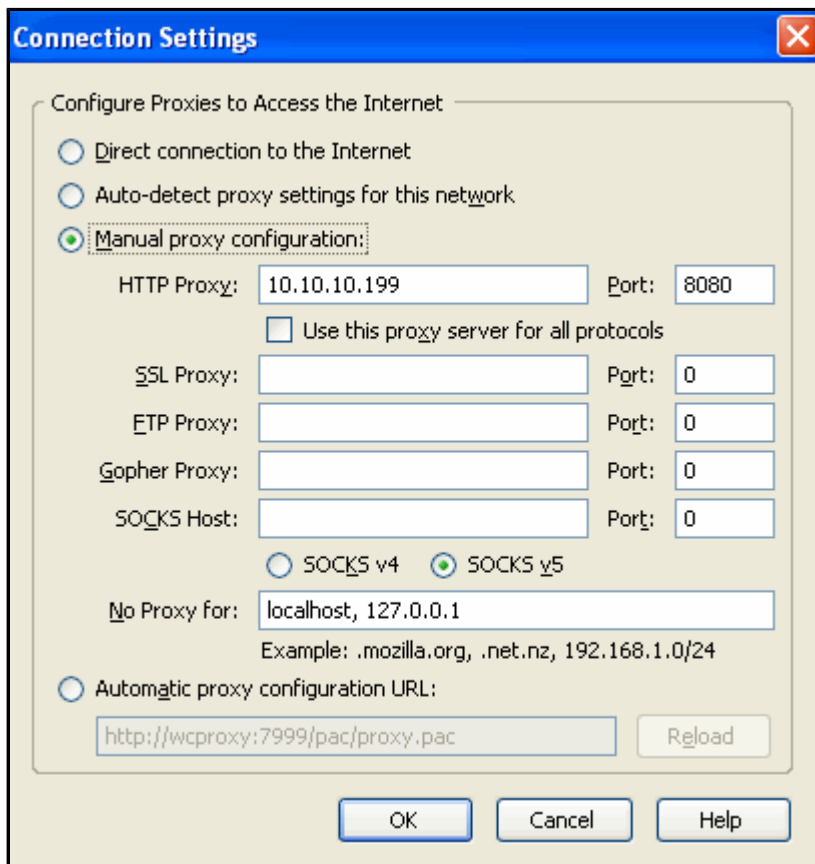

4. Select the **Manual Proxy Configuration** bullet.
5. In the **HTTP Proxy** box, type in the IP address of the machine the product is installed on. Do not change the **Port** box default of 8080.
6. Simply click **OK** to save changes and exit the dialogue screen.

NOTE: These instructions are for Mozilla Firefox version **2.0.0.1**. Earlier versions contain these settings under the **General** icon. If you have a Netscape browser and need assistance with configuration, please contact Wavecrest Support.

1.4.4 Prevent Users from Changing Browser Settings

1.4.4.1 Disable Internet Explorer's Connection Option

1. Go to **Programs - Administrative Tools** on your Domain Controller computer.
2. Open **Active Directory Users and Computers**.
3. Right-click on the root of the domain and select **Properties**.
4. Select the **Group Policy** tab and click **Edit** for the **Default Domain Policy** GPO.
5. Go to **User Configuration - Administrative Templates - Windows Components - Internet Explorer**.
6. Double-click **Internet Control Panel**.
7. Go to **Properties** and select the **enabled** bullet for **Disable the connections page**.
8. Click **OK** when are finished to save your changes. Users will no longer be able to see the **Connections** tab in their Internet Explorer browsers.

1.4.4.2 Create a Firewall Rule

There is another way to ensure that all users browsing the Web go through your proxy server and not bypass it. You can configure your firewall to deny all http (port 80) outbound requests except for ones coming from the IP(s) address of your proxy server(s).


How it works: The firewalls will deny all Web browsing requests except ones coming from the proxy server. This will ensure that all users browsing the Web have to go through your proxy server.

How to configure your firewall: All firewalls should support the above functionality but provide different ways of configuring this option. Please consult your firewall's admin guide for the proper settings.

1.5 Configure Authentication

In this step you specify if login names are primarily to be used in the product.

1. Go to **Setup** and click on the **Proxy** link.

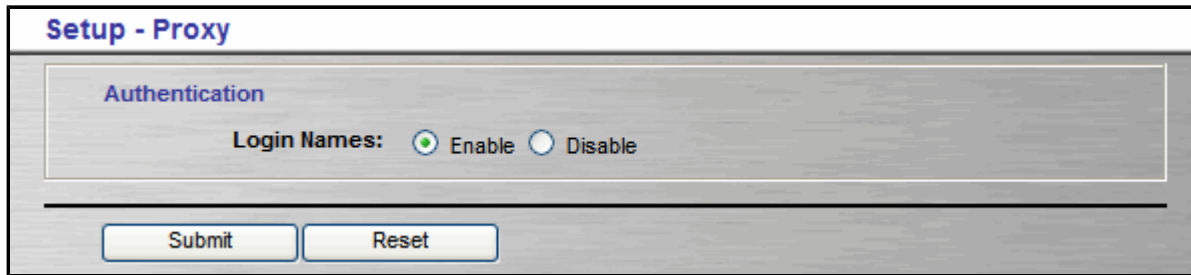

Setup - Proxy

Authentication

Login Names: ☒ Enable ☐ Disable

2. On this page, you will see that **Login Names** is enabled by default. This is what most administrators prefer to display in reports, but if you have static IP addresses or your network does not support login names, you can change the setting to "disabled." Doing so forces the product's reports to display IP addresses only.

1.6 Download the URL List

This step will ensure that you have the latest Wavecrest URL List, which will include the most recent categorized URLs and aid in accurate filtering and reporting.

If your Internet traffic goes through a proxy, begin with Step 1, as you will need to configure your proxy information first. If Internet traffic does not go through a proxy, then you can skip to Step 3 for downloading the list.

1. If your Internet traffic goes through a proxy, go to the **Setup – Download Settings** screen to configure your proxy information. This will ensure that you can download the list, product updates, and also receive product news.

The screenshot shows a web form titled "Setup - Download Settings". It has a section "Select Internet Connection to Wavecrest Download Servers" with two radio buttons: "Direct connection" (unselected) and "Use an HTTP proxy" (selected). Below this is the "HTTP Proxy Settings" section with five text input fields: "Proxy Host" (containing "proxyA"), "Proxy Port" (containing "8080"), "Domain" (containing "YOURDOMAIN"), "Username" (containing "tonyd"), and "Password" (containing masked characters). At the bottom are "Submit" and "Reset" buttons.

2. Fill in the text-entry boxes with the correct authentication credentials, and then click **Submit**.
3. To download the list, go to the **Administration - URL List** screen and click on the **Manual** link.

The screenshot shows a web form titled "Administration - URL List - Download - Manual". It has a section "Manually Download Latest URL List" with a "Status:" label and a green bar containing the text "Category Resolution is ready". Below this is an "Update URL List:" label and a "Download Now" button. At the bottom is a "Direct Download" section with a "Product Override" label and a link to "Wavecrest Downloads".


4. Next, click on the **Download Now** button. You should see a progress meter screen pop up. When it indicates that the download is complete, you can close the window.

NOTE: The Product Override link should only be used in the event that the URL list download from the product is unsuccessful. This link will take you to a Web page where you will find the URL list download and instructions for downloading from the site.

1.7 Set up Administrator Email

This step will let the Administrator receive all product-produced emails (e.g., error messages, fault indicators, URL list download notifications, etc.).

1. Go to the **Setup - Email** screen.

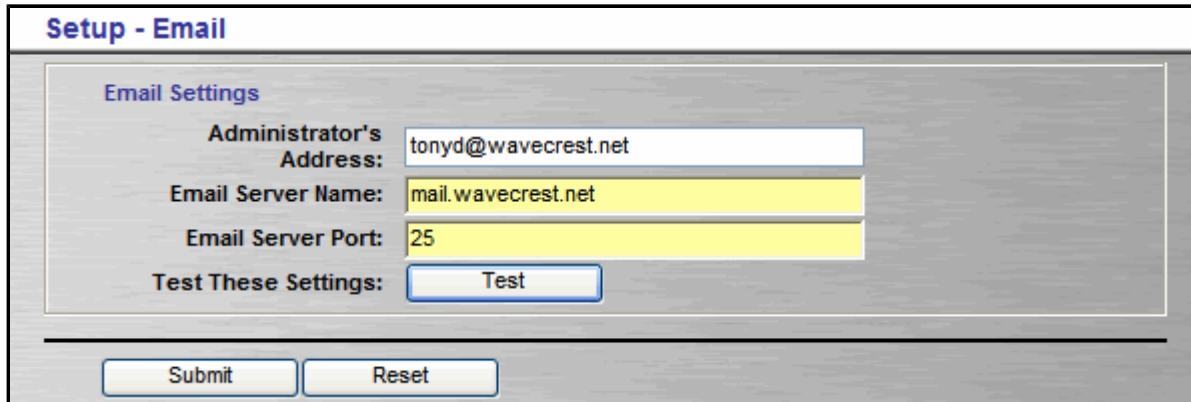


The screenshot shows a web interface titled "Setup - Email". Inside, there is a section labeled "Email Settings". It contains three input fields: "Administrator's Address:" with the value "tonyd@wavecrest.net", "Email Server Name:" with the value "mail.wavecrest.net", and "Email Server Port:" with the value "25". Below these fields is a "Test These Settings:" label and a "Test" button. At the bottom of the form are two buttons: "Submit" and "Reset".

2. Fill out the screen with the Administrator's email information.
3. Click on the **Test** button to make sure the product is communicating with the email server.
4. If it is successful, then click **Submit** to save the configuration.

1.8 Generate Some Logfiles

In this step you will generate and record some Web activity. Simply surf the Internet with your configured browser for about five minutes. For example, go to wavecrest.net, espn.go.com, msn.com, amazon.com, and cnn.com.

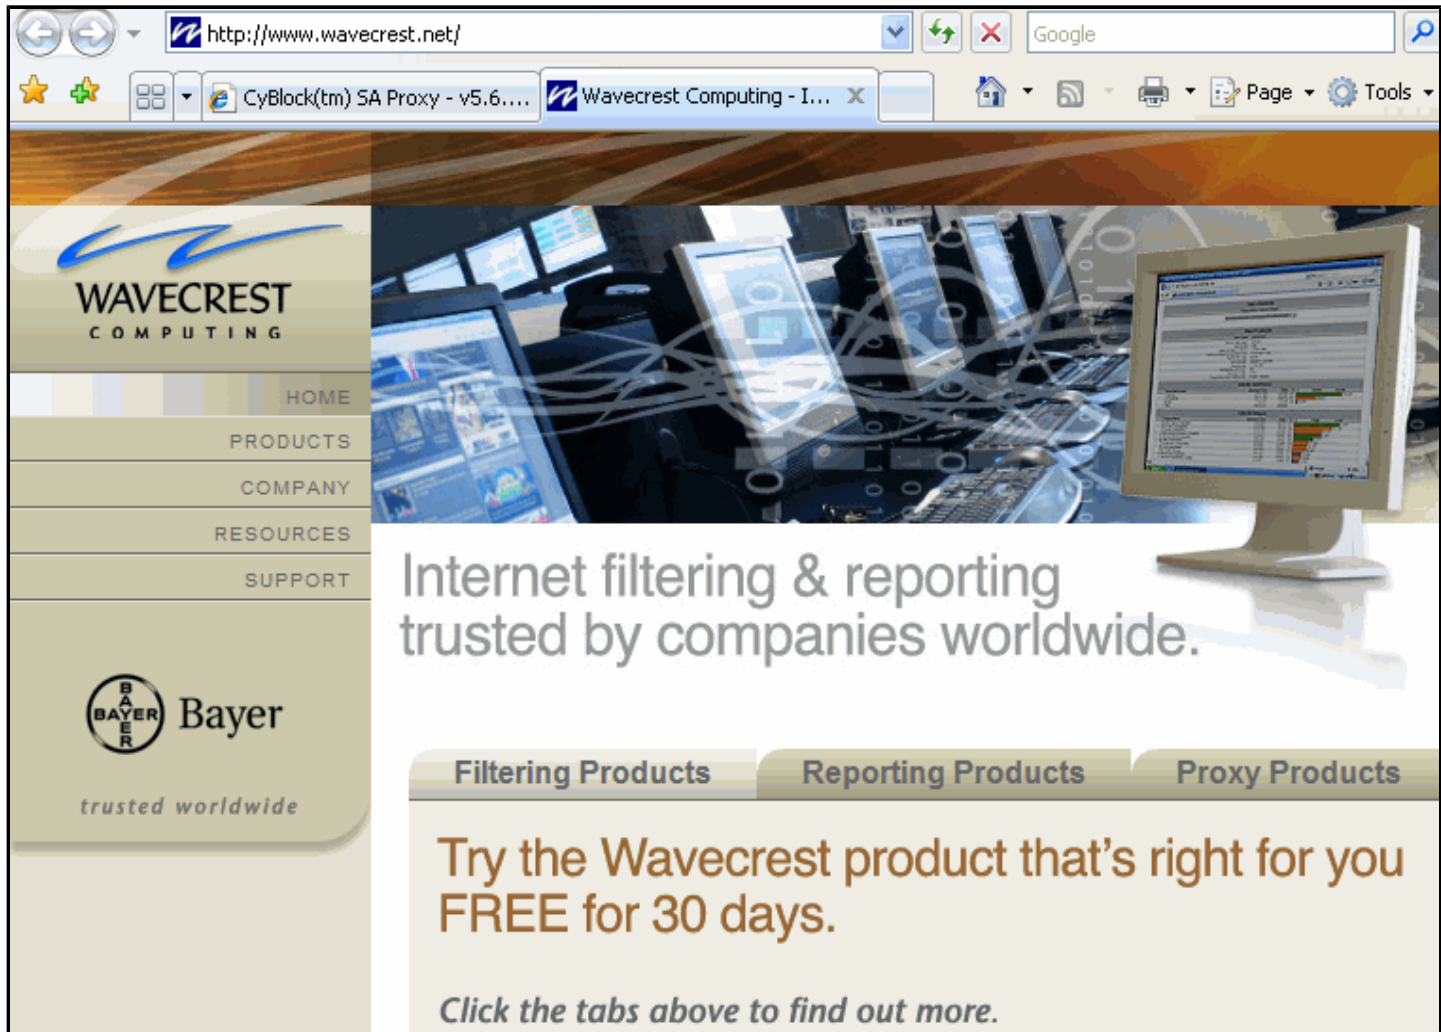

1.9 Run the Real Time Monitor Report

In this step you will see your "live" Internet activity displayed on the Real Time Monitor report screen.

1. Go to the **Reports - Real Time Monitor** screen.

Reports - Real Time Monitor

Setup

Controls: Start

Max Results: 100 URLs

Update Frequency: 5 Seconds

Groups and Ids

Groups: Enterprise

IDs:

Search

Categories

☒ All Categories

Agriculture

Auction/Classified

Banners/Ads

Business Services

Chat

Construction

Cults

Submit Reset

2. For our basic testing purposes, simply click **Submit**.
3. Open a new browser window and continue surfing the Web. You will begin seeing your Internet activity in the Real Time Monitor report screen.

ID	Date Time	Category Name	Web Page
pslis	Feb 21, 2007 8:48:47 AM	News and Media	http://www.foxnews.com/css/b_opera.css?1165942370
pslis	Feb 21, 2007 8:48:47 AM	News and Media	http://www.foxnews.com/css/tabs.css?1167243218
pslis	Feb 21, 2007 8:48:47 AM	News and Media	http://www.foxnews.com/css/main.css?1171308840
pslis	Feb 21, 2007 8:48:46 AM	News and Media	http://www.foxnews.com/css/root.css?1168014309
pslis	Feb 21, 2007 8:48:46 AM	News and Media	http://www.foxnews.com/
pslis	Feb 21, 2007 8:47:27 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/ten_q_fish_203.jpg
pslis	Feb 21, 2007 8:47:27 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/ncf_u_ferentz_203.jpg
pslis	Feb 21, 2007 8:47:20 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/blackhistory_q_kingIII_203.jpg
pslis	Feb 21, 2007 8:47:20 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/eticket_barrow_203.jpg
pslis	Feb 21, 2007 8:47:14 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0218/rpm_ap_harvick_martin_134.jpg
pslis	Feb 21, 2007 8:47:14 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0219/rpm_a_lastlapcrash_134.jpg
pslis	Feb 21, 2007 8:47:14 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0215/rpm_juan4_134.jpg
pslis	Feb 21, 2007 8:46:59 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/pg2_a_arod_jeter_203.jpg

4. This report gives you an immediate view of current Internet activity. You can view all category activity, or you can specify a particular category. If you specify a category, only URLs that belong in that category will appear in the Real Time Monitor report. You can also specify which group(s) or user(s) to monitor.

1.10 Create and Run a Site Analysis Report

Now that you have completed basic configuration of the product, it's time to run a report. In this step you will run a high-level read-only report against your logfile data. While this report is being run against your raw logfiles, it is recommended that you import your logfiles into the Wavecrest Database. This will increase reporting speed and allow you to use interactive reports. (See Section 3 on using the Wavecrest Database).

1. Go to the **Reports - Manual** screen.
2. Click on the first link, **Site Analysis**.

Reports - Manual - Site Analysis

Settings

Report Delivery:

Report Type:

ID Type:

ID Presentation: ☐ Anonymous IDs

Abuse Thresholding: ☒ Disable ☐ Enable

Timeframe

(start)

(stop)

Groups and IDs

Selected Groups

Selected IDs

3. In the **Report Type** field, *Read-Only* should be selected. (Interactive Reports will only run against logfiles imported into the Wavecrest Database. See Section 3 for instructions on importing data to the database.)
4. For basic testing purposes on this screen, use the **Timeframe** pulldown to *Select Custom Timeframe*. Date and Time field selections will appear. You need to configure a *Start Date/Time* and *Stop Date/Time* ensuring that surfing activity is included. Choose a time period that is covered by your existing logfiles, and only covers about one or two hours.
NOTE: *If you have large amounts of Web-use data, it is recommended that you set up and use the Wavecrest Database.*
5. Leave the Enterprise group in the **Selected Groups** box, and simply click **Submit**.

Reports - Manual - Report Progress

Request Information

Type of Activity: Site Analysis

ID Type: IP Addresses

Timeframe: Jan 1, 2007 12:00:00 AM - Jan 30, 2007 11:59:59 PM

Delivery Type: Wait For Report

Progress

Time of Activity: 00:00:11

Currently: All report(s) are completed

Progress: 99%

Status: Please wait...

When this report is completed, it will be presented in this browser window.

Cancel Report

- After your report finishes, click on the **All IDs** link that will be displayed. A sample portion of the Site Analysis report is shown below. The Site Analysis report will show you total visits by classification, category, and by user per category.

Transportation (Acceptable)					
ID Name	Download Time	Visits	% 0	3	6
1.mm03	:18	6	46%		6
2.patrick	:12	4	30%		4
3.minh	:09	3	23%		3
Totals	:39	13			

User News Groups (Acceptable)					
ID Name	Download Time	Visits	% 0	2	5
1.af26	:15	5	22%		5
2.alicew	:09	3	13%		3
3.nancy	:09	3	13%		3
4.carolyn	:06	2	9%		2
5.haroldb	:06	2	9%		2

- View your report, and verify that you see user IDs along with categorized Web activity.

NOTE: If you do not see data on the report, try running the same report but change the ID Type to "IP Addresses." If you only get activity when running a report against IP addresses, you most likely need to configure authentication on your network to see login names. If your configured logs do not contain login names (due to a lack of network user authentication), then you will only get data on IP addresses until/unless you start authenticating login names. From that point forward, you'll be able to use Login Names as the **ID Type** in reports.

2.0 Groups and IDs

Groups and IDs is a feature that is used to input and/or import users' ID information into the product for subsequent use in reporting and/or filtering. (Users can be grouped in accordance with some common characteristic, usually by department. They can also be entered without grouping.) The Groups and IDs import process can be performed manually or automatically. You also have the option of managing your Groups and IDs inside the product or at your directory source.

Before using the Groups and IDs feature, you must complete the Get Started section of this manual, which covers all setup procedures to get the product running. Once you have completed the product setup, you need to understand the product's grouping structure, which is discussed below.

The product consists of a "core" grouping structure for Groups and IDs that can be used "as-is" or expanded to fit your organization and its policies. The core structure cannot be deleted or changed. It contains a single top-level group called "Enterprise" and two subordinate groups, i.e., "Ungrouped IDs" and "VIP Group." Additional customer-specified subordinate groups and/or individual IDs can be added to Enterprise if desired.

The functions of these core groups are as follows:

- **Enterprise.** The Enterprise group encompasses "all monitored users," specifically those Internet and/or intranet users whose IDs are made available to the product. For example, if Enterprise is specified during the setup of a report, all monitored users who accessed Web sites during the requested time frame will be included in the report. This will occur whether or not the user population has been subdivided into lower-level groups.
- **Ungrouped IDs.** This group is a subordinate subgroup to Enterprise. If you don't need user-grouping, all users can be placed in the Ungrouped IDs group. In that case, there would be no need to set up additional groups. On the other hand, if user-grouping is set up, Ungrouped IDs can be used as a "holding area" for IDs until they can be moved into customer-specified groups.
- **VIP Group.** This group is another subgroup to Enterprise. It is used to exclude designated individuals from reports. When an ID is placed in this group, his or her Web-use activity will not appear in reports.
***NOTE:** In the case of Wavecrest's CyBlock filtering products, VIP users are still subject to 'universal' blocking schemes. That is, they are blocked from the same categories as other users, but their Web-use activity is not reported.*

Next, you must decide whether or not you will use grouping.

Using "groups" lets you apply different Web policy settings and report settings for each group. Even if you wish to use a universal Web-use policy for the entire company, you may wish to have individual department or division reports run and sent to their respective managers only. Grouping is also recommended if upper management or administrators want to see employee Web-use activity.

If you choose not to use grouping, we recommend that you place all of your users in Ungrouped IDs. You can populate Ungrouped IDs three different ways.

- When high-level reports such as Site Analysis are run, all new IDs (those not previously found) in the logfiles will be placed automatically in Ungrouped IDs.
- You can import IDs into Ungrouped IDs (See Section 2.2).
- You can manually add IDs to Ungrouped IDs (See Section 2.3).

In this section, you will find instructions on:

- **Required Setup** – Completing this section is required (mandatory) before importing any Groups and IDs.
- **Importing Groups and IDs** – Import from Active Directory or a text file.
- **Adding Groups and IDs** – Manually input Groups and IDs or add them after your initial import.
- **Editing Groups and IDs** – Delete, move, and modify Groups and IDs.
- **Finding an ID** - Search for an ID, its Group, and policy settings.

2.1 Required Setup

Before you begin importing Groups and IDs, you must decide where you want to modify your Groups and IDs: "Inside the Product" or "Outside the Product." Both options are discussed below.

Inside the Product (Default)

This option lets you add, delete, move, or modify Groups and IDs within the product after an import from Active Directory or a text file. Each time Groups and IDs are imported, whether manually or scheduled from Active Directory or a text file, only new Groups and IDs will be imported. (The new Groups and IDs imported will be based on your selected groups in your import configuration setup.) Your existing Groups and IDs will not be modified.

NOTE: *If you wish to have any users in the VIP Group, you MUST use this option.*

Outside the Product

This option will not let you add, delete, or move Groups and IDs within the product. It will not let you rename a Group or ID in the product. All of these changes must take place in the directory from which you are importing Groups and IDs. Each time Groups and IDs are imported, whether manually or scheduled from Active Directory or a text file, all Groups and IDs will be updated to identically match that configuration.

NOTE: *The Inside the Product option is the default because most administrators will not use the same grouping method from the directory source for the product. Most of the time, the directory source is grouped according to your network setup and not according to how you want to apply Web-use policies.*

1. To make your selection, go to **Advanced Settings – Groups and IDs** and click on the **Setup** link.

Advanced Settings - Groups and IDs - Setup

Required Setup for Import

Where do you want to manage additions, deletions, locations and renaming of imported Groups and IDs?
(The default option is "Inside the Product")

☒ **Inside the Product (Default)**

This option lets you add, delete, and move Groups and IDs within the product after importing from Active Directory or a Text file. Each time Groups and IDs are imported, whether manually or scheduled from Active Directory or a Text file, only new IDs will be imported. Your existing users will not be modified.

☐ **Outside the Product**

This option will **not** let you add, delete, or move Groups and IDs within the product. It will also **not** let you rename a Group or ID. All of these changes must take place in the directory from which you are using to Import Groups and IDs. Each time Groups and IDs are imported, whether manually or scheduled from Active Directory or a Text file, all Groups and IDs will be updated to identically match that configuration.

2. Click on the radio button to make your selection and then click **Submit** to apply your changes.


2.2 Import Groups and IDs

If you have not completed Section 2.1 Required Setup, do so first before getting started with importing Groups and IDs.


There are two ways to import your Groups and IDs. You can configure to import your Groups and IDs from (1) Active Directory or (2) a text file. If you choose to import from Active Directory, you have the option of creating a scheduled import to occur once every 24 hours.

2.2.1 Import from Active Directory


1. To create an Active Directory configuration to be imported, go to **Advanced Settings – Groups and IDs** and click on the **Active Directory** link.
2. Click on the **Setup** link. The configuration wizard will pop up.

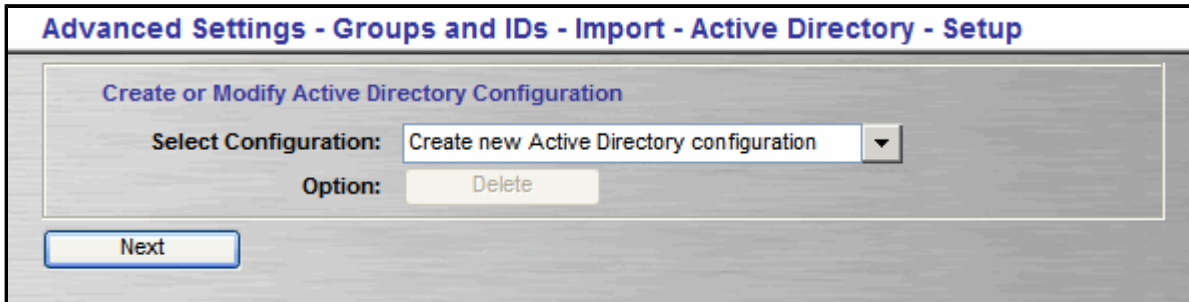

3. Leave the default selection set at *Create new Active Directory configuration* and click **Next**.
NOTE: If you ever want to make changes to any of your configurations, use the pull-down arrow, select the configuration that you want to change, and click Next. Make your changes where needed. Make sure you go through the entire wizard to submit your changes.
4. Now you must configure the connection to your Directory Server.

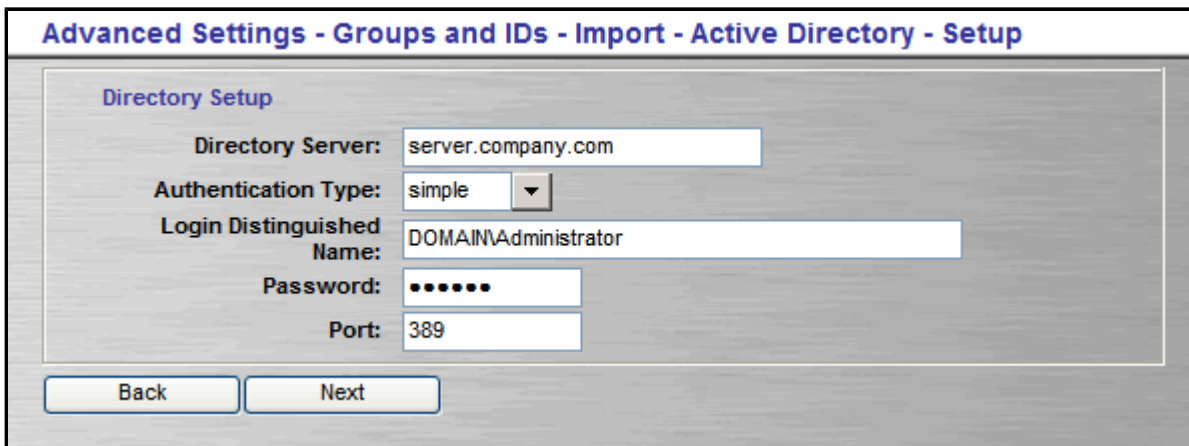

5. Enter your appropriate information in the following fields: **Directory Server**, **Login Distinguished Name**, and **Password**. Only modify the **Authentication Type** and **Port** if necessary. *Simple* is the default for Authentication Type, and 389 is the default for Port.
6. Click **Next**.
7. Both **Connection Status** and **Authentication Status** indicators should appear green.

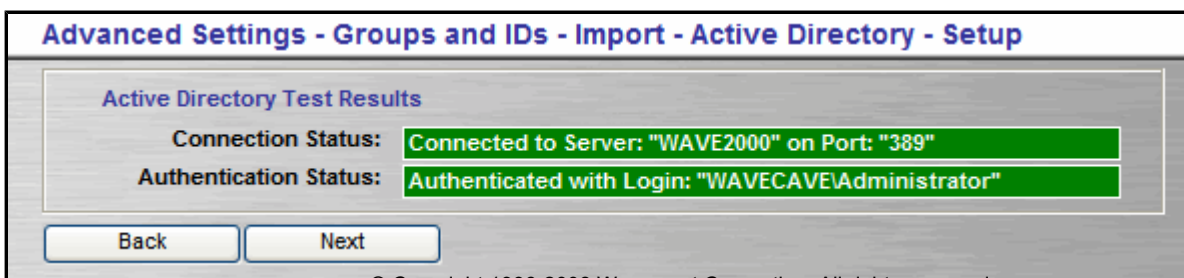

8. If both are green, click **Next**. If either status is red, click **Back** and double-check your Directory Setup settings.

Advanced Settings - Groups and IDs - Import - Active Directory - Setup

Select Naming Context:

Valid Naming Contexts: DC=Wavecave,DC=lan

Back Next

9. Select the **Valid Naming Context** and click **Next**.

Advanced Settings - Groups and IDs - Import - Active Directory - Setup

Type of Grouping

Group Type: ☒ OU ☐ Department ☐ Permission Group ☐ No Grouping

Back Next

10. Select the proper grouping type (such as OU or Department) and click **Next**.

Advanced Settings - Groups and IDs - Import - Active Directory - Setup

Select Groups

User Groups:

- Engineering
- Marketing

☐ Place all IDs from unhighlighted groups into "Ungrouped IDs"

Back Next

11. Select the groups to be imported by clicking on them, so they are highlighted. If you want to select multiple groups, hold down the Ctrl key and click on the groups you want imported.

NOTE: If you do not highlight any **User Groups**, all Groups and IDs will be imported. This is the preferred option if you want all new Groups and IDs imported with each import. Otherwise, only new IDs in your selected groups will be imported, and you will have to go back to your import configuration and select any new groups so that they will also be included in the import.

Optional: Check the checkbox at the bottom of the screen if you want to place the users from the unhighlighted groups into Ungrouped IDs. This option can be helpful, i.e., it will use the Ungrouped IDs group as a 'holding tank' while you decide where to assign certain IDs.

CAUTION: If you check the box and do not select any User Groups, all IDs will be placed in Ungrouped IDs. Also remember that if you selected to manage your Groups and IDs "outside the product," you will not be able to move any of your Groups and IDs in the product.

12. Once you have selected the groups that you want to import, click **Next**.

13. Type in a **Name** for this Active Directory configuration, and click **Finish**.

14. You should see a successful configuration message. You now have the option to:
 - a) Create another configuration by clicking on the link, or
 - b) Close the window.
15. Once you have created your configuration(s), you are now ready to import.
16. When you close the configuration wizard, you should still be at the **Advanced Settings – Groups and IDs – Active Directory** screen.

17. To import your configurations immediately, click on the **Manual** link.
18. If your import is successful, you should receive the following message.

19. Click on the link to view all of your imported Groups and IDs or close the window.
20. Every time you want to update your Groups and IDs, you will need to go to the **Advanced Settings – Groups and IDs – Active Directory** screen and click on the **Manual** link unless you schedule daily updates.
21. If you want to schedule imports to occur once every 24 hours, click on the **Schedule** link.

Advanced Settings - Groups and IDs - Import - Active Directory - Schedule

Schedule Active Directory Import

Automatic Update: Yes ▼

Hour: 3 ▼ P.M. ▼

Confirmation Email: No ▼

22. For the **Automatic Update** field, select Yes. If you ever want to stop the scheduled import, you will need to return to this screen and change the **Automatic Update** field to No.
23. Select the **Hour** that you want the import to occur, and select whether or not you wish to receive a **Confirmation Email** for the import.
24. Click **Submit** to save your changes.
25. If you set your block policies before importing your Groups and IDs, you can now check and make sure that your IDs were placed in the correct block policies. To do this, go to **Advanced Settings - Groups and IDs** and click on the **Modify** link.
26. In the **Group and ID** field, click a Group on the left and then an ID on the right, and you will see below the block policy applied to that user. ***NOTE:** Block policies are applied to IDs when importing from Active Directory, not the Group, which is why when you click on the Group name it will show a block policy of Default. However, all the users in that group will have the block policy you created with that group name.*

2.2.2 Import a Text File

For instructions on creating your text file, see Appendix A.

1. To import Groups and IDs from a text file, go to **Advanced Settings – Groups and IDs** and click on the **Text File** link.

The screenshot shows a web form titled "Advanced Settings - Groups and IDs - Import - Text File". The form is divided into four main sections:

- Import Text File:** Contains a "File:" label, a text input field with the path "C:\Program Files\Wavecrest\w\cldb\import.txt", and a "Browse" button.
- Delimiter Character:** Contains a "Choices:" label and five radio button options: "Vertical Bar" (checked), "Comma", "TAB", "Space", and "Other:" followed by a text input field.
- Column Position Definitions:** Contains two rows of input fields. The "Required:" row has "ID" with value "1" and "Parent 1" with value "3". The "Optional:" row has "Full Name" with value "2", "Parent 2" (empty), "Parent 3" (empty), and "Parent 4" (empty).
- Preview Export Data Format:** Contains a "Preview Configuration:" label and a "Preview" button.

At the bottom of the form are two buttons: "Submit" and "Reset".

2. In the **File** field, type in the file name or click on the **Browse** button to locate the file you want to import.
3. Check the box for the **Delimiter Character** that you used in your text file.
4. For the two required data fields (columns), enter column numbers that correspond to the left-to-right column positioning of those fields in the text file. Column numbers range from 1 to 6.
5. If any of the optional data fields (columns) are used in the text file, enter column numbers that correspond to the left-to-right column positioning of those fields in the text file. Column numbers range from 1 to 6.
6. Click the **Preview Configuration** button to check that your data is in the correct columns. If it is not, close the Preview screen, retype and double-check your values for **Column Position Definitions**.

Advanced Settings - Groups and IDs - Import - Text File Preview

Preview Settings

Status:

Data for all required fields has been entered. Please confirm that each field's data appears in the correct column.

ID	Parent 1	Parent 2	Parent 3	Parent 4	Full Name
ID-000001	Ungrouped IDs				FN-000001
ID-000002	Ungrouped IDs				FN-000002
ID-000003	Ungrouped IDs				FN-000003
ID-000004	Ungrouped IDs				FN-000004
ID-000005	Ungrouped IDs				FN-000005

Each field's position in the user-grouping hierarchy is shown in the tree below:

Enterprise

Parent 4 optional

Parent 3 optional

Parent 2 optional

Parent 1

ID (Full Name optional)

Close Window

7. If your data and columns are correct, close the Preview window.

8. Click **Submit** to import your Groups and IDs.

NOTE: Configured text file imports will occur at midnight each day.

CAUTION: If you have both a text file and an Active Directory import configured, whenever an Active Directory import occurs, the text file will also import along with it.

2.3 Add Groups and IDs

If you do not want to import Groups and IDs, you can manually add each Group or ID in the product. Even if you did import your Groups and IDs, you can add more, IF you chose to manage your Groups and IDs “Inside the Product” (See Section 2.1). If you chose to manage them “Outside the Product,” you can only add Groups and IDs to your directory source and re-import. This screen will not be available to you.

NOTE: If you plan to have groups, we recommend that you create all groups first before creating the IDs to go in each group.

2.3.1 Add a Group

1. Go to **Advanced Settings – Groups and IDs** and click on the **Add** link.

Advanced Settings - Groups and IDs - Edit - Add

Select Groups and IDs

Groups

- Enterprise (10)
- Engineering (2)
- Marketing (3)
- Ungrouped IDs (5)
- VIP (0)

Selected Group's IDs

Add Group or ID

Type: ☒ Group ☐ ID

Group or ID Name: Sales

Full Name: No Full Name allowed for Groups

Set Policy And Report Settings

Email Address(es): Default

Save Directory: Default

Abuse Thresholds: Default

Display Categories: Default

Maximum IDs: Default

2. Select the “parent” group to which you wish to add the group. In this case we will add our new group to *Enterprise*. **NOTE:** Groups can only be added to other groups. A group can not be added to an ID.
3. For **Type**, select the **Group** radio button.
4. In the **Group or ID Name** field, type in the name of the group (for example, "sales") you are adding.

5. The **Full Name** field will be grayed out because it cannot be used for groups.
6. Complete the other fields.
 - Email Address(es): Type in email address(es) of the person (or people) who should receive Web-use reports on the selected group.
 - Save Directory: Reports will be saved to a directory of your choosing so that they can be accessed by the person (or people) who need to see them. This field is only applicable for groups.
 - Abuse Thresholds: Select a policy to apply to the selected Group or ID. See Section 4 on abuse threshold policies.
 - Display Categories: Select a policy to apply to the selected Group or ID. See Section 5 on display category policies.
 - Maximum IDs: Select a policy to apply to the selected group. See Section 5 on maximum ID policies.
7. Click **Submit** to add the group and settings.

2.3.2 Add an ID

1. Now, we will add an ID to the group that was just created. You will remain at the **Groups and IDs - Edit - Add** screen.

Advanced Settings - Groups and IDs - Edit - Add

Select Groups and IDs

Groups

- Enterprise (10)
- Engineering (2)
- Marketing (3)
- Sales (0)**
- Ungrouped IDs (5)
- VIP (0)

Selected Group's IDs

Add Group or ID

Type: ☐ Group ☒ ID

Group or ID Name:

Full Name:

Set Policy And Report Settings

Email Address(es):

Save Directory:

Abuse Thresholds: ▼

Display Categories: ▼

Maximum IDs: ▼

2. Select the “parent” group to which you wish to add the ID. In this case we will add our new ID to *Sales*.

NOTE: *IDs can only be added to other groups. An ID can not be added to another ID.*

3. For **Type**, select the **ID** radio button.
4. In the **Group or ID Name** field, type in the ID name (for example, "bsmith").
5. Type in the **Full Name** of the ID you are adding.
6. The **Email Address(es)** field will be grayed out because it can only be used for groups.
7. The **Save Directory** field will be grayed out because it can only be used for groups.
8. Select an **Abuse Thresholds** policy by using the pull-down menu. See Section 4 on how to create an Abuse Threshold policy.
9. Select a **Display Categories** policy (which specifies the categories to be displayed in reports) by using the pull-down menu. See Section 5 on how to create a **Display Category** policy.

10. The **Maximum IDs** policy is only available for groups. See Section 5 on how to create a Maximum ID policy.
11. Review selections and entries to be sure they are correct.
12. Click **Submit** to add the new ID.
13. Click the **Close Window** button when finished.

2.4 Edit Groups and IDs

In this section, you will learn how to delete, move, and modify your Groups and IDs. If you chose to manage your Groups and IDs “Inside the Product” in the Required Setup (See Section 2.1), then follow the instructions in these sections.

If you chose to manage your Groups and IDs outside the product, then you can only edit Groups and IDs in your directory source and re-import to apply your changes. However, you will be able to modify the report and policy settings for each group inside the product at the Modify screen.

2.4.1 Delete

1. Go to **Advanced Settings – Groups and IDs** and click on the **Delete** link.

Advanced Settings - Groups and IDs - Edit - Delete

Select Group or ID to Delete

Groups	Selected Group's IDs
Enterprise (18)	Bob Smith (bsmith)
Engineering (4)	
Marketing (4)	
Sales (1)	
Ungrouped IDs (9)	
VIP (0)	

Submit Close Window

2. Click on the Group or ID that you want to delete so that it is highlighted.
3. Click **Submit** to delete the Group or ID.
4. Close the Window when you are finished.

2.4.2 Move

1. Go to **Advanced Settings – Groups and IDs** and click on the **Move** link.

Advanced Settings - Groups and IDs - Edit - Move

Select Groups and IDs

Groups

- Enterprise (16)
- Engineering (5)
- Marketing (5)
- Sales (1)
- Ungrouped IDs (5)
- VIP (0)

Selected Group's IDs

- alilarter (alarter)
- davidmustaine (dmustaine)
- ericjohnson (ejohnson)
- jimhetfield (jhetfield)
- williamcarter (wcarter)

Select Destination Group

Groups

- Enterprise (16)
- Engineering (5)
- Marketing (5)
- Sales (1)
- Ungrouped IDs (5)
- VIP (0)

Submit **Close Window**

2. Select (highlight) the Group(s) or ID(s) that you want to move. You can select more than one Group or ID at a time by holding down the CTRL key while clicking on the Groups or IDs.
NOTE: Do not select "Enterprise." It cannot be moved or made subordinate to another group.
3. Select the Destination Group for your previously selected Group(s) or ID(s).
NOTE: The destination group must be different from the group to be moved. Also, a "parent" group (such as Ungrouped IDs) cannot be moved into one of its subordinate 'child' groups (for example, a newly created group under Ungrouped IDs named "Sales").
4. Click **Submit** to move the Group(s) or ID(s).
5. Close the Window when you are finished.

2.4.3 Modify

1. Go to **Advanced Settings – Groups and IDs** and click on the **Modify** link.

Advanced Settings - Groups and IDs - Properties - Modify

Select Groups and IDs

 **Groups**

 **Selected Group's IDs**

Enterprise (16)
Engineering (5)
Marketing (5)
Sales (1)
Ungrouped IDs (5)
VIP (0)

Abigail Harris (aharris)
georgdolivo (gdolivo)
johnsmith (jsmith)
Mary Diaz (mdiaz)
michaelscott (mscott)

Rename Group or ID

Group or ID Name: mscott

Full ID Name: michaelscott

Set Policy And Report Settings

Email Address(es): No email address allowed for IDs

Save Directory: No save directory allowed for IDs

Note: When changing group policies, sub groups are not affected.

Abuse Thresholds: Default ▼

Display Categories: Default ▼

Maximum IDs: Default ▼

2. Select (highlight) the Group or ID that you want to modify.

NOTE: When changing group policies, sub-groups are not affected; it only changes the policy for IDs in the selected group. Therefore, if you want to change a policy for a group's subgroups, you must change the policy for each subgroup.

3. Make your changes to the following fields.
Email Address(es): Type in email address(es) of the person (or people) who should receive Web-use reports on the selected group.
Save Directory: Reports will be saved to a directory of your choosing so that they can be accessed by the person (or people) who need to see them. This field is only applicable for groups.
Abuse Thresholds: Select a policy to apply to the selected Group or ID. See Section 4 on abuse threshold policies.
Display Categories: Select a policy to apply to the selected Group or ID. See Section 5 on display category policies.
Maximum IDs: Select a policy to apply to the selected group. See Section 5 on maximum ID policies.
4. Click **Submit** to apply your changes.
5. Click on the **Close Window** button when you are finished.

2.5 Find an ID

If for any reason you need to quickly find to which Group an ID is assigned or view the policy settings for a user ID, this feature will give you a quick view of that information.

- 1. To find an ID, go to **Advanced Settings - Groups and IDs** and click on the **Find** link.
- 2. Type in the user **ID** or **Full Name** of the monitored user.

Advanced Settings - Groups and IDs - Edit - Find

Find ID

Enter ID or Full Name:

d

dshrute (Dwight Shrute)

- 3. Click **Submit**, and the product will retrieve the settings for that user.

Advanced Settings - Groups and IDs - Edit - Find

Find ID

Enter ID or Full Name:

ID Name:

dshrute

Full ID Name:

Dwight Shrute

Location:

Enterprise - Engineering

Email Address(es):

dshrute@company.com

Save Directory:

C:\TEMP

Abuse Thresholds:

Abuse Policy A

Display Categories:

Default

Maximum IDs:

Default

Submit

Close Window

3.0 Data Management

Because this product is a standalone proxy server, it creates its own logfiles on Web use. Reports can be run from these logfiles or the logfiles can be imported into the optional-use Wavecrest Database where the data is compressed, which speeds up reporting. Even though the database is an optional-use feature, it must be used if you choose to use Interactive Reporting (see Section 5), and it is highly recommended that you use the database if you have large amounts of Web-use data.

In managing your logfile data, this section will show you how to:

- **Set up the Logfile Directory** - Specify the directory location of your logfiles.
- **View Logfiles** – View your configured logfiles.

Logfile data can be imported into the Wavecrest Database where it is compressed and converted to XML format. Most importantly, this will reduce report-generation time by more than 95 percent (compared to methods that generate reports by reading logfiles directly). This section will show you how to:

- **Enable the Wavecrest Database** – Turn on the database.
- **Import Logfile Data into the Database** – Manually import configured logfile data or schedule the import to occur daily.
- **View Data** – View the data.
- **Export Data** – Export data to other applications.
- **Delete Data** – Delete data from the database.

To use the database, you must first enable it. Once enabled, the product automatically retrieves the previous day's raw logfile data and stores it in the database. It does this on a daily scheduled basis. This process could be scheduled, for example, between 1:00 and 4:00 AM, or other periods of low Web usage. The product default is midnight. This way the previous day's data will be available the following morning for report generation. The data will be permanently stored within the product to enable generation of a variety of reports, i.e., daily, weekly, monthly, quarterly, etc.

Although processing logfiles is active from the time the database feature is first enabled, the product is only designed to automatically retrieve and store "future" logfile data as it is created in daily use. (It does not automatically "go back" and retrieve data generated prior to the database being enabled.) To populate the internal database with past configured logfile data, you can import these logfiles into the database manually. This data can then be used to generate reports covering past periods. Alternatively, you can select to convert all past data on the Schedule screen.

The primary benefit of using the Wavecrest Database is report-generation speed. When the database is used, a virtually unlimited number of authorized users can generate their own reports in minimal time. This can be done with little or no help from IT network personnel.

For example, when the database is enabled, this product can run a large weekly Site Analysis report in seconds rather than hours, and can run a monthly report in minutes rather than days. This dramatic reduction is made possible by storing the source data in the internal database.

With respect to scalability, this product can run a report based on 1 GB of data in about the same amount of time required to run a similar report by reading a 1 MB logfile. With respect to persistence, once the configured logfile data has been imported into the database, you never have to read it again. The data remains stored and readily available for future use.

Another benefit is that the database can hold immense amounts of data for long periods of time. This permits the generation of reports from the “distant” past if necessary.


The export feature of the Wavecrest Database has many benefits also. Data can be exported as a CSV or XML file to other applications e.g., spreadsheets, report generators, relational databases, etc. The parameters when exporting data are customizable as well. You can choose the groups, IDs, Categories, and timeframe of the data to export.

3.1 Logfile Data

3.1.1 Set Up the Logfile Directory

Most likely, you will not need to use this screen, unless you want to change the location of the logfiles. If you want to change the location of your logfile source, these instructions will step you through the process.

1. Create a new logfile storage folder in the desired non-default location.
2. Go to **Logfiles - Setup**.

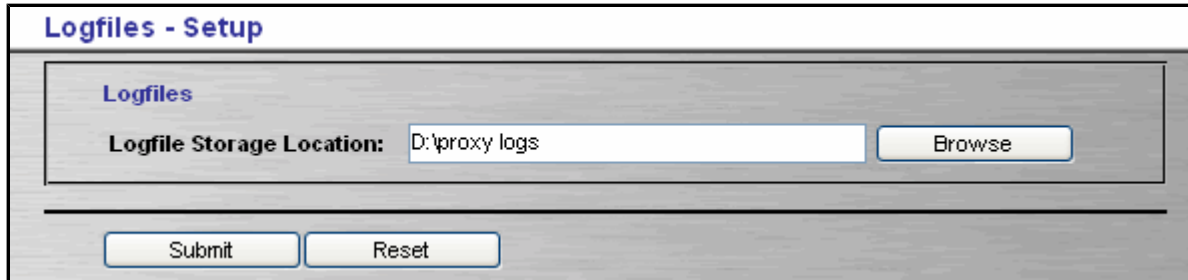

The screenshot shows a web-based configuration window titled "Logfiles - Setup". Inside the window, there is a sub-section titled "Logfiles". Below this, the text "Logfile Storage Location:" is followed by a text input field containing the path "D:\proxy logs". To the right of the input field is a "Browse" button. At the bottom of the window, there are two buttons: "Submit" and "Reset".

3. Click on the **Browse** button. This will display available drives and directories.
4. In the dialog screen, browse to the parent of the folder you created in step (1) above.
5. Highlight the new folder and hit the Select button.
6. Click **Submit** to apply changes, or click **Reset** to reload previous values.

3.1.2 View Logfile Data

This screen displays the logfiles that have been configured. The product uses these logfiles to produce reports. For each logfile configuration, this screen displays the (Configuration) Name, Type of Logfile and Path. For each individual logfile it displays the Log Name, Start Time, Stop Time and Status.

1. Go to **Logfiles – Viewer**, and the logfiles will appear on the opened screen.

Log Name	Start Time	Stop Time	Status
proxy20070226.txt	Feb 26, 2007 3:21:11 PM	Feb 26, 2007 11:31:26 PM	valid
proxy20070227.txt	Feb 27, 2007 9:50:47 AM	Feb 27, 2007 11:44:09 PM	valid
proxy20070228.txt	Feb 28, 2007 12:04:12 AM	Feb 28, 2007 1:50:33 AM	valid

2. In the **Display Section**, use the radio button or pull down menu to select the logfile(s) you want to view. Below are definitions of the information shown for each logfile.

Logfile Configuration Name: The name for each configuration appears in the upper left of its display listing.

Type of Logfile: The logfile source type.

Path: The directory path to the logfiles.

Log Name: Name of validated file.

Start Time: Date and time of first record in logfile. (See note below.)

Stop Time: Date and time of last record in logfile. (See note below.)

Status: Status of logfile for report generation purposes, using the three codes defined below.

- **Valid:** Logfile can be used to generate reports.
- **Invalid:** Logfile has a problem or is not compatible with report request.
- **Pending:** Validity has not yet been determined, i.e., current file has not been read yet.

3.2 Wavecrest Database

3.2.1 Required Setup

Before using the optional Data Manager, you must enable it. When you do so, the product imports your logfile data into its internal database and converts it into a more efficient format. This greatly increases the speed with which Web-use reports can be generated. With the Data Manager enabled, you can also export data to external applications.

1. Go to **Logfiles – Data Manager** and click on the **Setup** link.
2. Select the **Enable** radio button to enable the Data Manager.

Logfiles - Data Manager - Setup

Manage Your Log Data

☒ **Enable**

By enabling the Data Manager, logfile data will be imported into an internal database every 24 hours. Reports will be run against this Import Data and as a result, reports will be created much faster. With the Data Manager enabled you also have the option to export your data to external applications.

NOTE: If reporting on past time periods (older than 24 hours) is desired, then you will first need to manually generate the older logfiles into Import Data.

☐ **Disable**

With the Data Manager disabled, reports will be run against the logfiles you have configured. Logfile data will not be generated into an internal database, and there will not be an option to export data to external applications.

The Data Manager is enabled.

Submit **Reset**

3. Click **Submit**. A screen containing instructions for importing your logfile data will pop up.


3.2.2 Import Logfile Data

This section provides instructions for using the “Import Data” features within the Data Manager. These features help you import and manage logfile data very efficiently. You can configure the product to import the data automatically on a daily basis or on a manual basis.

3.2.2.1 Import Options

With the **Import Data - Options** screen, you can choose a location to store the imported data. It also lets you choose whether or not to receive email notifications of suspected data errors, if they occur during the import.

1. Go to **Logfiles – Data Manager** and click on the **Import Data** link.
2. Click on the **Options** link.

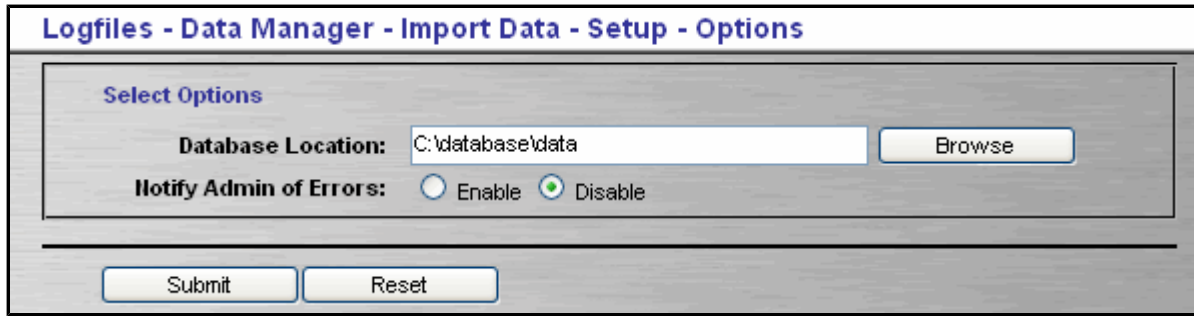

The screenshot shows a web-based configuration window titled "Logfiles - Data Manager - Import Data - Setup - Options". The window contains a "Select Options" section with two main settings. The first is "Database Location:", which has a text input field containing the path "C:\database\data" and a "Browse" button to its right. The second is "Notify Admin of Errors:", which features two radio buttons: "Enable" (which is unselected) and "Disable" (which is selected, indicated by a green dot). Below these settings, there are two buttons: "Submit" and "Reset".

3. Type in the path or use the **Browse** button to select the **Database Location**.
4. Choose whether or not to receive email notification regarding import data errors. Use the radio buttons to **Enable** or **Disable** this feature.
5. Click **Submit** to apply your settings.

This screen lets you manually import configured logfiles into the internal database. If no logs are available, the screen will essentially be blank. When logs are available, the screen lists them and provides check boxes for selecting the logs you want to import.

IMPORTANT: Because the process of generating import data is memory-intensive, we recommend increasing the product's memory setting on the **Setup - Memory** screen. As a general guideline, increase the setting to approximately half of the actual available memory on the machine.

NOTE: *Generating import data does not affect the original logs. This product only reads logfile data; it does not modify logfiles in any way.*

1. Go to **Logfiles – Data Manager** and click on the **Import Data** link.
2. Click on the **Manual** link under **Import**. A list of logs available for import will appear.

Logfiles - Data Manager - Import Data - Import - Manual			
Cyfin SA			
Type of Logfile: Cyfin SA			
Path: C:\Program Files\Wavecrest\Cyfin\wc\cf\log			
Log Name	Raw Data Start Time	Raw Data Stop Time	Import
proxy20061122.txt	Nov 21, 2006 5:45:16 PM	Nov 21, 2006 6:00:35 PM	☐
proxy20061213.txt	Dec 12, 2006 5:24:46 PM	Dec 12, 2006 5:25:13 PM	☐
proxy20061219.txt	Dec 18, 2006 10:45:15 AM	Dec 18, 2006 4:17:05 PM	☐
proxy20061220.txt	Dec 19, 2006 10:43:54 AM	Dec 20, 2006 3:01:05 AM	☐
proxy20061221.txt	Dec 20, 2006 10:43:51 AM	Dec 21, 2006 3:01:05 AM	☐
proxy20061222.txt	Dec 21, 2006 10:43:48 AM	Dec 22, 2006 3:01:05 AM	☐
proxy20070105.txt	Jan 4, 2007 1:10:50 PM	Jan 4, 2007 1:25:18 PM	☐

3. Check the boxes of the logs that you wish to import. If you wish to import all of the logs, you can click on the **Select All** button at the end of the logfile list.
4. Click **Submit** to import the logs into the database.

3.2.2.3 Scheduled Import

This screen lets you schedule the import of logfiles into the internal database. Be sure to enable the database in order to use this feature.

IMPORTANT: Because the process of generating import data is memory-intensive, we recommend increasing the product's memory setting on the **Setup - Memory** screen. As a general guideline, increase the setting to be approximately half of the available memory on the machine.

NOTE: Generating import data does not affect the original logs. This product only reads logfile data; it does not modify logfiles in any way.

1. Go to **Logfiles – Data Manager** and click on the **Import Data** link.
2. Click on the **Schedule** link under **Import**.

Logfiles - Data Manager - Import Data - Import - Schedule

Schedule Import Data

Scheduler: ☒ Enable ☐ Disable

Log data will be imported daily.

Hour: 12 A.M.

Import Logfiles: Last 24 hours
Last 24 hours
All

3. Select the **Enable** radio button to schedule import data.
4. Select the **Hour** to begin importing data. If you have large amounts of data, you may want to schedule the import data process to run when Web traffic is low.
5. Using the pulldown menu, select if you want to **Import Logfiles** from the *last 24 hours* or If you want to import *all* logfiles.
6. Click **Submit** to apply your changes.

3.2.3 View Data

This is a display-only feature. It displays the Data Manager's imported logfile data. For each import data configuration, this screen displays the (Configuration) Name, Type of Logfile and Path. For each individual logfile it displays the Log Name, Imported Start Time, and Imported Stop Time.

To view your logfiles, go to **Logfiles – Data Manager** and click on the **Import Data** link. Then, click on the **Viewer** link.

Logfiles - Data Manager - Import Data - View - Viewer

Display Selection

View last:

Cyfin SA

Type of Logfile: Cyfin SA

Path: C:\Program Files\Wavecrest\Cyfin\wc\cf\log

Log Name	Imported Start Time	Imported Stop Time
proxy20070407.txt	Apr 6, 2007 4:00:44 PM	Apr 7, 2007 5:01:05 AM
proxy20070408.txt	Apr 7, 2007 4:00:40 PM	Apr 8, 2007 5:01:05 AM
proxy20070409.txt	Apr 8, 2007 4:00:37 PM	Apr 9, 2007 5:01:05 AM
proxy20070410.txt	Apr 9, 2007 4:00:35 PM	Apr 10, 2007 5:01:05 AM
proxy20070411.txt	Apr 10, 2007 4:00:32 PM	Apr 11, 2007 5:01:05 AM
proxy20070412.txt	Apr 11, 2007 4:00:30 PM	Apr 12, 2007 5:01:06 AM
proxy20070413.txt	Apr 12, 2007 4:00:28 PM	Apr 13, 2007 5:01:07 AM
proxy20070414.txt	Apr 13, 2007 4:00:25 PM	Apr 14, 2007 5:01:05 AM
proxy20070415.txt	Apr 14, 2007 4:00:22 PM	Apr 15, 2007 5:01:05 AM
proxy20070416.txt	Apr 15, 2007 4:00:19 PM	Apr 16, 2007 5:01:07 AM
proxy20070417.txt	Apr 16, 2007 4:00:17 PM	Apr 17, 2007 5:01:05 AM
proxy20070418.txt	Apr 17, 2007 4:00:14 PM	Apr 18, 2007 5:01:09 AM

Close Window

3.2.4 Export Data

With the export data feature, you can manually export data to a file for use in external applications, e.g., spreadsheets, report generators, relational databases, etc.

1. Go to **Logfiles – Data Manager** and click on the **Export Data** link.

Logfiles - Data Manager - Export Data - Manual

Select Output Options

☒ Local or Mapped Drive ☐ UNC path

Storage Location: C:\Program Files\Wavecrest\wc\my files\expor **Browse**

Filename: exportData

Format: XML

Settings

Hits-Visits: Visits Only (does not include jpg, gif, etc.)

Timeframe

Start Date/Time: Jan 01, 2007 @ 12 A.M.

Stop Date/Time: Jan 31, 2007 @ 12 A.M.

Groups and IDs

Selected Groups: Enterprise **Selected IDs:** **Search**

Category Selection

☒ All Categories

Categories: Agriculture, Auction/Classified, Banners/Ads, Business Services, Chat

Submit **Reset**

2. Choose the 'destination' directory location type by clicking on the radio button for **Local or Mapped Drive** or **UNC path**.
3. Indicate a **Storage Location** for the export data. If the drive is a Local or Mapped Drive, use the **Browse** button to locate the directory for saving the export file to. If the directory is on a UNC path, type in the full address here manually.
4. Type in a **Filename** for the export.
NOTE: If you leave a default name in this box, any previous information written to a file of that name in the same location will be overwritten.
5. Use the **Format** pull-down menu to select either CSV or XML file format.
6. Use the **Hits-Visits** pull-down menu to select whether you want all hits and visits exported or just visits.
7. Select the **Start Date/Time** and **Stop Date/Time** for the data you want to export.

8. Choose the Groups and/or IDs whose data you want to export. If you know the Groups and/or IDs whose data you want exported, you can type them in the appropriate text boxes. Alternatively, click on the **Search** button to select the Group(s) and/or ID(s). The following screen will pop up in a separate window.

Groups and IDs Search

Select Groups and IDs

Groups

- Enterprise (15)
- Engineering (4)
- Marketing (5)
- Sales (1)
- Ungrouped IDs (5)
- VIP (0)

Selected Group's IDs

- dwightshrute (dshrute)
- Jane Sayes (jsayes)
- Phillip Lynott (philliplynott)
- Wendy Williams (wwilliams)

Deselect All Save Selected IDs

Submit

9. Several options are available for selecting Groups and IDs whose data you want exported. You can select one Group or ID or you can select multiple Groups and/or IDs.
- **Selecting a Group or ID:** If you are only selecting one Group or ID, select that Group or ID by clicking on it so that it is highlighted, and click **Submit**.
 - **Selecting more than one Group:** If you are selecting multiple Groups, hold down the control key and click on the Groups you want, then click **Submit**.
 - **Selecting more than one ID:** If you are selecting multiple IDs, hold down the control key and click on the IDs to select them. If the IDs you want to select are in more than one group, when you are finished selecting the IDs in a Group, you must click the **Save Selected IDs** button before moving on to the next Group to select additional IDs. When you are finished selecting all of your IDs, click on the **Submit** button.
 - **Selecting both Group(s) and ID(s):** If you are selecting IDs and Groups (or even one ID and one Group), you must select your IDs first, making sure you click on the **Save Selected IDs** button after making your ID selections in each Group. When you have finished selecting the ID(s), then make your Group selection(s). Click **Submit** when you have finished.

The Groups and IDs that you have selected will appear in the **Groups and IDs** field.

Groups and IDs

Selected Groups

Selected IDs

- dshrute
- philliplynott

Search

NOTE: You can delete a Group or ID in the **Groups and IDs** field by highlighting the Group or ID and hitting the Delete key on your keyboard.

10. Select the **Categories** that you want to include in your export data. If you want data for all categories exported, select the **All Categories** check box.
11. Click **Submit** to export the data.

3.2.5 Delete Data

This feature allows you to delete database data. You can delete data manually or schedule for deletions to occur automatically once a day.

NOTE: *Deleting database data does not affect logs or logfile data. Wavecrest products only read and process logfile data; they do not delete, alter or distort logfiles in any way.*

3.2.5.1 Manually Delete Data

1. Go to **Logfiles – Data Manager** and click on the **Import Data** link.
2. Click on the **Manual** link under **Delete**.

Logfiles - Data Manager - Import Data - Delete - Manual

Display Selection
View Older Than:
* Indicates that the raw logfile configuration is unavailable.

Cyfin SA
Type of Logfile: Cyfin SA
Path: C:\Program Files\Wavecrest\Cyfin\wc\cf\log

Log Name	Imported Start Time	Imported Stop Time	Delete
proxy20070412.txt	Apr 11, 2007 4:00:30 PM	Apr 12, 2007 5:01:06 AM	☐
proxy20070413.txt	Apr 12, 2007 4:00:28 PM	Apr 13, 2007 5:01:07 AM	☐
proxy20070414.txt	Apr 13, 2007 4:00:25 PM	Apr 14, 2007 5:01:05 AM	☐
proxy20070415.txt	Apr 14, 2007 4:00:22 PM	Apr 15, 2007 5:01:05 AM	☐
proxy20070416.txt	Apr 15, 2007 4:00:19 PM	Apr 16, 2007 5:01:07 AM	☐
proxy20070417.txt	Apr 16, 2007 4:00:17 PM	Apr 17, 2007 5:01:05 AM	☐
proxy20070418.txt	Apr 17, 2007 4:00:14 PM	Apr 18, 2007 5:01:09 AM	☐

3. Select the database data you want to see by using the **View Older Than** pulldown menu.
4. Select the check boxes of the imported data that you want to delete. If you want to delete all data, click on the **Select All** button at the bottom of the screen.
5. Click **Submit** to delete your selections.

1. Go to **Logfiles - Data Manager** and click on the **Import Data** link.
2. Click on the **Schedule** link under **Delete**.

Logfiles - Data Manager - Import Data - Delete - Schedule

Schedule Data Removal

Scheduler ☐ Enable ☒ Disable

Hour: 12 A.M.

Delete data older than: 90 Days

90 Days
6 Months
1 Year

Submit Reset

3. Select the **Enable** radio button to schedule for automatic deletions to occur.
4. Select the **Hour**.
5. Using the **Delete data older than** pulldown menu, select what old data you want deleted automatically.
6. Click **Submit** to apply your settings.

4.0 Web Policy Support

This product contains several configurable features that let you correlate and optimize its support to your organization's Web usage policy. That is, you can easily configure these features to customize the format and content of the product's reports, highlight inappropriate activity, and if applicable, block selected Web sites (CyBlock products only). In addition, if you need to, you can configure different policy settings for different sub-organizations and individual users.

Before configuring these features, make sure you have completed the Get Started section of this manual. In addition, if you plan to apply different Web policies to different groups or users, be sure to complete the Groups and IDs import process (Section 2 of the manual).

The following sections provide instructions for configuring these features:

- **Classify Categories** – Rate categories for acceptability based on your company's Web usage policy.
- **Custom Categories** – Create up to 12 custom categories for tracking Web sites of interest to your company.
- **Abuse Thresholds** – Set abuse thresholds to help you quickly detect Web abuse.

All Web policy support features are optional, but they can be very helpful in controlling and monitoring Web usage in the workplace. By using these features, you can greatly reduce the risk of legal liability, wasted bandwidth, security threats, and lost productivity. These same features help ensure the production of clear, actionable information that management and IT staff can use to correct any deviations from the organization's policy.

4.1 Classify Categories

By classifying categories, you are assigning an acceptability rating to each Web-use category. Categories can be rated as Acceptable, Unacceptable or Neutral in accordance with your organization's Internet usage policy. Initially, each category has a default classification which you can accept if you like, but you will probably want to change some of these to conform to your policy. Your classification settings will appear next to each category or URL on reports, making it easy for you to detect when Web abuse has occurred. **NOTE:** For descriptions of each category, go to **Advanced Settings – Category Setup** and click on the **Descriptions** link.

NOTE: You can make changes to the classifications, but you cannot disable the "Classification" feature altogether.

Follow the steps below to classify (rate) your categories.


1. Go to **Advanced Settings – Category Setup** and click on the **Classification** link.

Advanced Settings - Category Setup - Classification

Classification Settings

Categories:	Classification:
Agriculture	Neutral
Auction/Classified	Unacceptable
Banners/Ads	Neutral
Business Services	Acceptable
Chat	Unacceptable
Construction	Neutral
Cults	Unacceptable
Download Sites	Unacceptable
Drugs	Unacceptable
Education	Acceptable
Entertainment	Unacceptable
Environment	Acceptable
Fantasy Leagues	Unacceptable
Financial	Unacceptable
Food and Drink	Unacceptable
Gambling	Unacceptable
Games	Unacceptable
General Blogging	Neutral

2. Use the drop down menus next to each category to classify each as *Neutral*, *Acceptable*, or *Unacceptable*.
3. Click Submit to apply your changes. The report below is an example of how classifying your categories can help you quickly see which site visits were acceptable, unacceptable, or neutral.

Visits By Classification					
Classification Name	Download Time	Visits	%	0	25,911 51,823
Acceptable	1:19:11:09	51,823	47%		51,823
Neutral	1:07:18:12	37,564	34%		37,564
Unacceptable	15:44:03	18,881	17%		18,881
Totals	3:18:13:24	108,268			


Note that each site is color coded based on the classification settings you made.
Green = Acceptable, Orange = Unacceptable, Gray = Neutral

4.2 Custom Categories

In addition to our 69 standard categories, the product comes with 12 custom categories for your use. Just like any other category, they can be viewed, be classified, and have an abuse threshold. Custom categories can be used for a variety of reasons, e.g., to create a white list, block additional Web sites or track employees' use of company intranet sites.


The custom categories are empty by default, but you can add any number of URLs to them and rename the categories to something that is relevant to you.

1. To create a custom category, go to **Advanced Settings – Category Setup** and click on the **Name Custom** link.

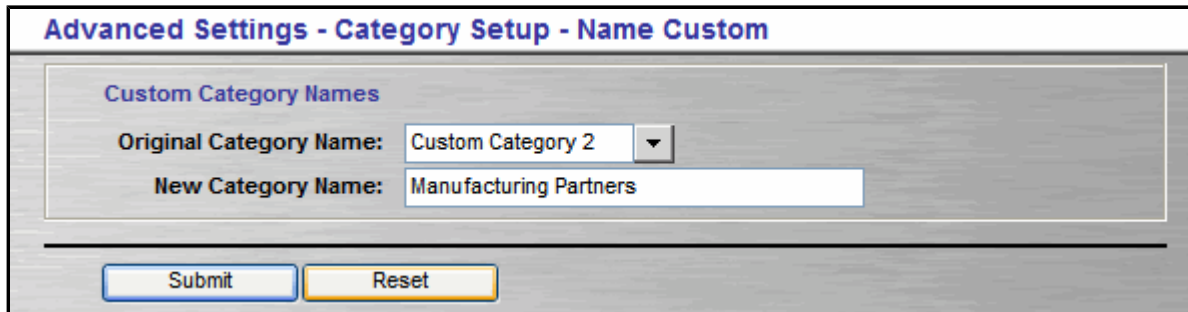

The screenshot shows a web form titled "Advanced Settings - Category Setup - Name Custom". Inside the form, there is a section labeled "Custom Category Names". It contains two fields: "Original Category Name:" with a dropdown menu currently showing "Custom Category 2", and "New Category Name:" with a text input field containing "Manufacturing Partners". At the bottom of the form, there are two buttons: "Submit" and "Reset".

2. Select the *Custom Category* that you want to use from the **Original Category Name** field. By default, these will be named *Custom Category 1*, *Custom Category 2*, and so on through *Custom Category 12*.
3. Type in a new name in the **New Category Name** field. The name cannot exceed 50 characters.
4. Click **Submit**. If you know you want to create more than one custom category, repeat steps 1 through 4 until you have created names for all the categories you want to create.
5. Now that you have named your custom categories, you must add URLs to them.
6. Go to **Advanced Settings – Category Setup** and click on the **Edit URLs** link.

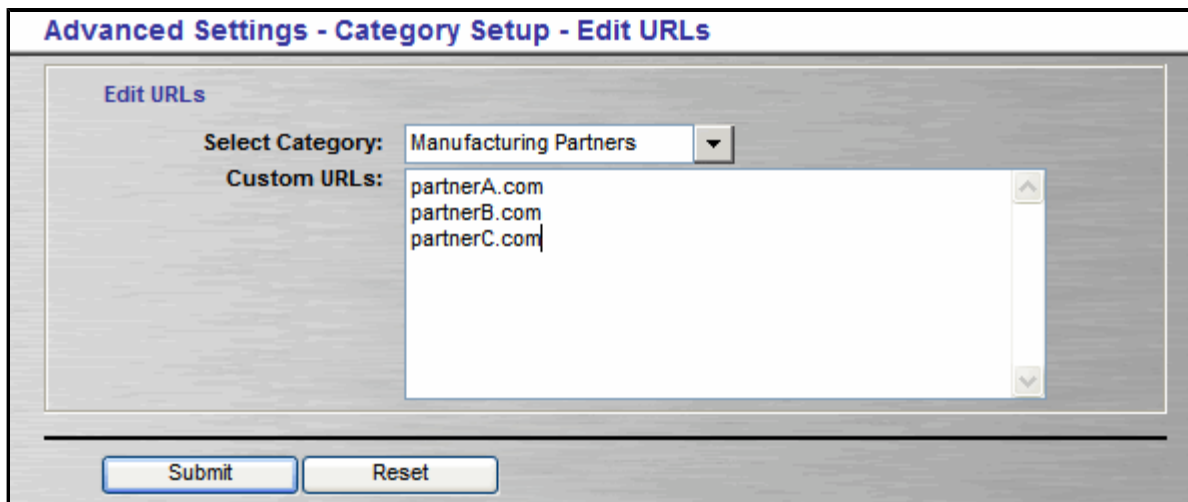

The screenshot shows a web form titled "Advanced Settings - Category Setup - Edit URLs". Inside the form, there is a section labeled "Edit URLs". It contains a "Select Category:" dropdown menu currently showing "Manufacturing Partners". Below it is a "Custom URLs:" text area containing the following text:
partnerA.com
partnerB.com
partnerC.com
At the bottom of the form, there are two buttons: "Submit" and "Reset".

7. Using the **Select Category** pull down menu, select the custom category you just created.
8. In the text entry area for **Custom URLs**, type in the URLs.
NOTE: To add multiple URLs, simply type in the first URL and hit Enter; then type in the second URL and hit Enter, etc. Repeat until you have finished.

(Optional) Add Wildcard Entries. You can use wildcards to add multiple URLs simultaneously. For example, let's assume that your organization has an intranet with multiple Web sites that use the organization's main Web site name as part of their URLs (e.g., ford.com). The main site name could be at the end, beginning, or middle of the intranet Web site names. Examples of wildcards used in such cases include:

- Intranet site name ends with ford.com/----- enter *.ford.com/
- Intranet site name starts with http://www.ford----- enter http://www.ford.*
- Intranet site name contains .ford----- enter *.ford.*

When you make wildcard entries such as these, this product will simultaneously add all of the applicable sites to the selected category.

CAUTION: *Adding wildcard URLs to the category could cause a performance slowdown.*


9. Click **Submit** to add the URLs.

4.3 Edit URLs in Categories

You can edit URLs in both standard and custom categories. More specifically, you can populate any of the categories with URLs of your own choosing.

NOTE: *Your changes will override any future list downloads.*

1. Go to **Advanced Settings – Category Setup** and click on the **Edit URLs** link.

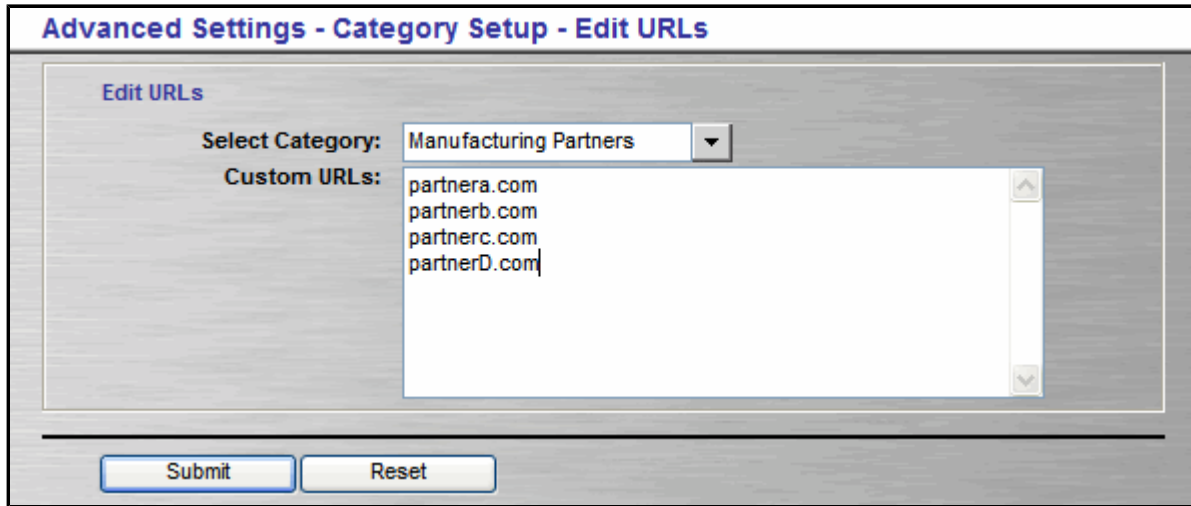

2. Using the **Select Category** pull down menu, select the category you want to edit.
3. **Add URLs.** In the text entry area for **Custom URLs**, type the URLs.
NOTE: *To add multiple URLs, simply type in the first URL and hit **Enter**; then type in the second URL and hit **Enter**, etc. Repeat until you have included all the URLs.*

(Optional) Add Wildcard Entries. You can use wildcards to add multiple URLs simultaneously. For example, let's assume that your organization has an intranet with multiple Web sites that use the organization's main Web site name as part of their URLs (e.g., ford.com). The main site name could be at the end, beginning, or middle of the intranet Web site names. Examples of wildcards used in such cases include:

- Intranet site name ends with ford.com/----- enter *.ford.com/
- Intranet site name starts with http://www.ford----- enter http://www.ford.*
- Intranet site name contains .ford----- enter *.ford.*

When you make wildcard entries such as these, this product will simultaneously add all of the applicable sites to the selected category.

CAUTION: *Adding wildcard URLs to the category could cause a performance slowdown.*

4. **Modify URLs.** Highlight the portion of the URL you would like to modify. Then type the changes.
5. **Delete URLs.** Highlight the URL you would like to delete and then hit the Delete key on your keyboard.
6. Click **Submit** to apply your changes.

4.4 Abuse Thresholds

You can create and assign abuse threshold policies to users, groups, or the entire organization. Thresholding shows abuse that has occurred based on a customer-specified number of allowable (Web site) visits in a 24-hour period. The abuse threshold values are shown via bar graphs in reports.

The steps below take you through the process of setting your abuse thresholds.

1. Go to **Advanced Settings – Report Settings** and click on the **Abuse Thresholds** link.

Categories (Classification)	Enter 24 Hour Visit Threshold
Agriculture (N)	100
Auction/Classified (U)	5
Banners/Ads (N)	100
Business Services (A)	100
Chat (U)	5
Construction (N)	100
Cults (U)	1

2. Use the **Available Policies** pull down menu to select a policy. If you are creating a new policy, select *Create new policy*.
3. Enter a policy name in the **Selected Policy Box**.
NOTE: *This is also where you would delete a policy by clicking on the **Delete** button.*
4. Assign Groups and/or IDs to the block policy. If you know the Groups and/or IDs that you want assigned, you can type them in the appropriate text boxes. Otherwise, click on the **Search** button to select the applicable Group(s) and/or ID(s). The following screen will pop up in a separate window.

5. Several options are available for selecting Groups and IDs. You can select one Group or ID, you can select multiple Groups or IDs, or you can select multiple Groups and IDs.
 - **Selecting a Group or ID:** If you are only selecting one Group or ID, select that Group or ID by clicking on it so that it is highlighted, and click **Submit**.
 - **Selecting more than one Group:** If you are selecting multiple Groups, hold down the control key and click on the Groups you want so that they are highlighted, then click **Submit**.
 - **Selecting more than one ID:** If you are selecting multiple IDs, hold down the control key and click on the IDs to select them. If the IDs you want to select are located in different Groups, you must click the **Save Selected IDs** button before moving on to the next Group to select additional IDs. If you do not do this, your previous selections will be lost. When you are finished selecting all of your IDs, click **Submit**.
 - **Selecting both Group(s) and ID(s):** If you are selecting Groups and IDs (or even one Group and one ID), you must select your IDs first. Be sure to click on the **Save Selected IDs** button after making your ID selections in each Group. When you have finished selecting the ID(s), then make your Group selection(s). Click **Submit** when you have finished.

The Groups and IDs that you have selected will appear in the Assign Groups and IDs field.

NOTE: You can delete a Group or ID in the **Assign Groups and IDs** field by highlighting it and hitting **Delete** on your keyboard.

6. Next to each category, type in the number of Web page visits allowed to each category (before they are considered abuse) in a 24 hour period.
7. Click **Submit** to apply your changes.

Below is an example of a report that was run with abuse thresholding enabled.

Top Users or Workstations Activity					
ID Name	Download Time	Visits	% 0	1,209	2,418
1. payton	2:00:54	2,418	<1%		611
2. cadice	51:03	1,021	<1%		310
3. joeb	57:27	1,149	<1%		296
4. tyler	51:21	1,027	<1%		290
5. sandy	44:15	885	<1%		289
6. allendrap	30:00	600	<1%		259
7. carolyn	34:51	697	<1%		258
8. johnhill	16:06	322	<1%		253
9. george	50:00	1,000	<1%		246
10. alicew	22:54	458	<1%		241
11. cv	13:15	265	<1%		237
12. brad	1:14:33	1,491	<1%		187

The blue in the bar graph represents the allowed visits, and the red shows where the user exceeded the threshold.

NOTE: When you "enable" abuse thresholding in a report, it stays enabled in all subsequent reports unless you "disable" it.

5.0 Reporting

With this product, you can run high and low-level reports, schedule reports to run regularly, set report preferences, and review report policies. (For a complete listing of reports and their definitions, please see Appendix B.) You also have the option to use interactive reporting. Interactive reports allow you to drill down to get more detailed results on employee Web use by simply clicking on the report's elements, e.g., categories, ID names, and classification ratings. (To use Interactive Reporting, the Wavecrest Database must be enabled so that reports will run against Web-use data in the database. Interactive Reporting will not work if reports are run from the raw logfiles.)

Running reports allows you to analyze employee Web use so that you can easily identify instances of Web abuse that can drain productivity, pose a legal liability threat, or threaten network security. Reports can also be useful if you use one or more custom categories to monitor internal intranet sites in your organization. The reports will show how often – and how – some of these sites are being used by your employees.

Before running any reports, be sure to complete the Get Started section of this manual. The Get Started section covers the required setup needed to start running reports. You also need to be familiar with the section on Web Policy Support (Section 4) as 'reporting' goes hand-in-hand with that section. This product is designed so that you can customize it according to your organization's Web policy. As a result, the reports you receive will reflect that policy. This makes it easier for you to detect Web abuse quickly when viewing your reports.

In addition, if you plan to schedule reports, you must first make sure that you have (a) attached an email address to the Groups or IDs you wish to schedule reports for, (b) configured a directory for the reports to be saved in, or (c) both. You will find instructions on how to do this in Section 2.4.3 Modify Groups and IDs.

In this section, you will find instructions on how to:

- **Set Report Preferences** – Set up interactive reports, select a filename format, create a custom header, change the report language, and more.
- **Run a Real Time Monitor Report** - Lets you see live Web activity.
- **Run Reports** – Covers instructions on how to manually run three different types of reports: High-level Summaries, Detailed Audits, and Additional Manager Reports.
- **Schedule Reports** – Instructions for scheduling a report and modifying or deleting previously scheduled reports.
- **Use Interactive Reports** - Covers how to retrieve and use interactive reports.
- **Review Report Policies** – Lets you view summarized information of your policy settings.

Typically, you will manually run reports that are not needed on a regular basis. Otherwise, we suggest that you set reports to run automatically by scheduling them. This will save a tremendous amount of time. Another way to save time, especially for IT administrators, is to assign operator accounts. Individuals with operator accounts can access the product, but only to a limited menu that lets them run reports on the groups and users that they have been authorized to review. To read how to set up operator accounts, see Section 6.

In addition, you can use the Interactive Reporting feature. With interactive reports, report recipients can quickly drill down from higher level reports to more detailed audit reports on a specific user, category, or classification rating without having to go back in the product to run a manual report.

The Review Report Policies screen gives you a handy overview of your report policies. You will be able to view Groups and IDs that can be reported on, abuse threshold settings, category classification and blocking (CyBlock products only), etc. At a glance, you will be able to quickly see if any setting is missing or needs to be changed.

In addition to knowing how to run reports, it is important to understand several factors that affect the accuracy of reporting. For more information on this topic, i.e., data accuracy, the difference between "Hits" and "Visits," and using reliable metrics, read the following white papers on our Web site at <http://www.wavecrest.net/editorial/whitepapers.html>.

5.1 Set Report Preferences

To let you further customize your reports, this product contains several options that will affect how your reports will look and what information will be included in them. These options are explained below.

5.1.1 Language Settings

This screen lets you select the language to be used in reports.

1. Go to **Advanced Settings – Language Settings**.




2. Select the **Language** that you want to be used in reports.
3. Click **Submit** to apply your selection.

5.1.2 Custom Header

This screen lets you display a custom header message (HTML or TXT) on every report. The message can contain any information that might be helpful to the recipient of the report. Examples include suggestions on how to use the report, phone numbers for advice or clarification, link to an FAQ on your Intranet, link to your usage policy, etc

1. To use this feature, you must first create a header message.
2. Create the message as a .TXT file, and take note of the path you decide to use for the file. When creating the message, utilize **HTML** tags if you need them. **NOTE:** *The default text file path for Cyfin products is wc/cf/db/custom.txt; for CyBlock products, it is wc/cyblock/db/custom.txt.*
3. Go to **Advanced Settings – Report Settings** and click on the **Custom Header** link.

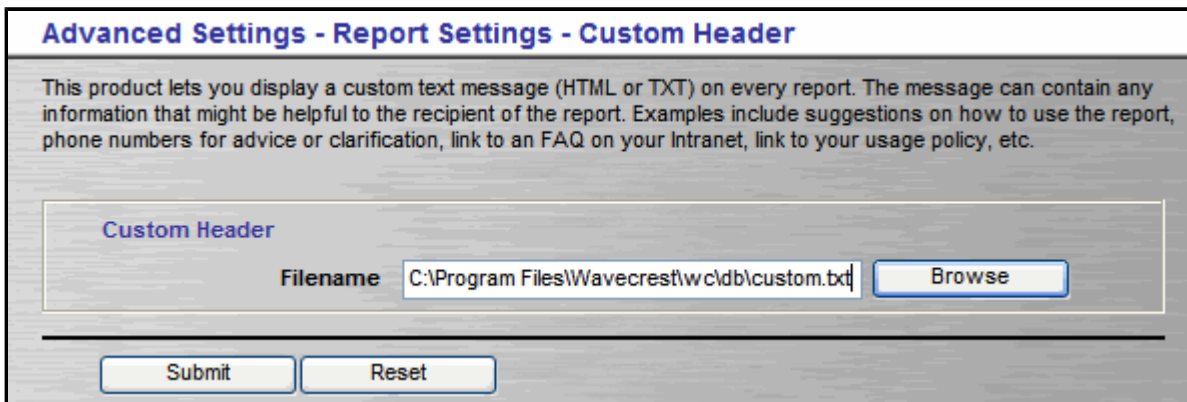

4. Enter the complete path to the .TXT file you created in the **Filename** text entry box, or use the **Browse** button to find the file.
5. Click **Submit** to apply your selection. The message will appear automatically in all reports that are subsequently generated.

5.1.3 Display Categories

This screen lets you create, edit and delete Display Categories "policies." That is, it lets you establish settings that specify which content category tables are to be displayed in reports. These policies can be applied to Groups or IDs as you see fit (See Section 2 to read more about Groups and IDs).

1. Go to **Advanced Settings – Report Settings** and click on the **Display Categories** link.

Advanced Settings - Report Settings - Display Categories

Select Policy
Available Policies: Create new policy ▼
Selected Policy: Policy D Delete

Assign Groups and IDs
Note: Assigning Groups and/or IDs to the selected policy is optional.
 **Groups**  **IDs**
Engineering Search

Select Categories To Be Displayed Key: (N)neutral (A)acceptable (U)nacceptable

Categories (Classification)	Select "On" To Display
Agriculture (N)	☐ On ☒ Off
Auction/Classified (U)	☒ On ☐ Off
Banners/Ads (N)	☐ On ☒ Off
Business Services (A)	☒ On ☐ Off
Chat (U)	☒ On ☐ Off
Construction (N)	☒ On ☐ Off
Cults (U)	☒ On ☐ Off
Download Sites (U)	☒ On ☐ Off
Drugs (U)	☒ On ☐ Off
Education (A)	☐ On ☒ Off
Entertainment (U)	☒ On ☐ Off
Environment (A)	☐ On ☒ Off

2. Use the pull-down menu to select an **Available Policy** to modify, or leave the default selection *Create new policy*.
3. If you chose a previously created policy, its name will display in the **Selected Policy** text field. If you are creating a new **Display Categories** policy, type in a name for it.
NOTE: You can also delete a Display Categories policy by clicking on the *Delete* button.
4. **Assign Groups and IDs** to the policy. This step is optional. You can create a policy and assign Groups and IDs at a later time. If you wish to apply a universal policy to all users, select Enterprise.
5. **Select Categories to Be Displayed** in reports by selecting the *On* radio button. For categories not to be displayed, select the *Off* radio button.
6. Click **Submit** to apply your changes.

5.1.4 Filename Format

This screen lets you choose a filename format for saving reports. The available formats are made up of various combinations of the date, time, group or ID, and report type.

1. Go to **Advanced Settings – Report Settings** and click on the **Filename Format** link.

Advanced Settings - Report Settings - Filename Format

Filename Format

Select: ReportType_GroupOrID (e.g., Site_Analysis_Enterprise)

Submit

- ReportType_GroupOrID (e.g., Site_Analysis_Enterprise)
- GroupOrID_ReportType (e.g., Enterprise_Site_Analysis)
- ReportType_GroupOrID_Date (e.g., Site_Analysis_Enterprise_YYYYMMDD)
- GroupOrID_ReportType_Date (e.g., Enterprise_Site_Analysis_YYYYMMDD)
- Date_ReportType_GroupOrID (e.g., YYYYMMDD_Site_Analysis_Enterprise)
- Date_GroupOrID_ReportType (e.g., YYYYMMDD_Enterprise_Site_Analysis)
- ReportType_GroupOrID_Date_Time (e.g., Site_Analysis_Enterprise_YYYYMMDD_HHMMSS)
- GroupOrID_ReportType_Date_Time (e.g., Enterprise_Site_Analysis_YYYYMMDD_HHMMSS)
- Date_Time_ReportType_GroupOrID (e.g., YYYYMMDD_HHMMSS_Site_Analysis_Enterprise)
- Date_Time_GroupOrID_ReportType (e.g., YYYYMMDD_HHMMSS_Enterprise_Site_Analysis)

2. Select the filename format that you prefer from the **Select** pull-down menu.
3. Click **Submit** to apply your selection.

5.1.5 Interactive Reports

This screen lets you establish settings for interactive reports, such as how long to keep reports, where to store them, and changing the password needed to retrieve the reports.

1. Go to **Advanced Settings - Report Settings** and click on the **Interactive Reports** link.

Advanced Settings - Report Settings - Interactive Reports

Report Server

IP Address: 10.10.10.27

Set DIIS Hostname (Optional)

Hostname:

Options

Report Expiration: 90 days

Report Storage Directory: C:\Program Files\Wavecrest\jwc\cf\reports\inter Browse

Reports Password: *****

Submit Reset

2. In the **IP Address** field, select the IP address to be used for reporting if a pulldown menu is present. If the IP address is plainly displayed with no available pulldown menu, the product found the one NIC IP address and no further action is required.
3. This step is optional. If you want to identify an additional report server DNS hostname, type it in the **Hostname** field. This additional server can be used for internal or external use.
Example: If you have external users, you may want them to be able to access Web-use reports. In this case, you would use this field to type in a DNS hostname that external computers will recognize.

4. Select the **Report Expiration** using the pulldown. Interactive reports will no longer be accessible past the number of days you select.
5. In the **Report Storage Directory** field, a default location will appear, but this can be changed. To change the directory location where Interactive reports will be stored, either use the **Browse** button to select the location or type the directory location path in the field. If it is a UNC path, you must type it in the field.
6. Type in a password in the **Reports Password** field. This password must be used by anyone trying to access an Interactive report. The default password is "password" (no quotes).

5.1.6 Maximum IDs

This screen lets you establish Maximum IDs "policies." These policies will dictate the maximum number of IDs to be displayed in report tables.

1. Go to **Advanced Settings – Report Settings** and click on the **Maximum IDs** link.

The screenshot shows a web interface titled "Advanced Settings - Report Settings - Maximum IDs". It is divided into three main sections:

- Select Policy:** Contains a dropdown menu for "Available Policies" with "Create new policy" selected, and a text field for "Selected Policy" containing "Policy E". A "Delete" button is to the right of the text field.
- Assign Groups and IDs:** Contains two dropdown menus labeled "Groups" (showing "Engineering") and "IDs". A "Search" button is to the right. Below these is a note: "Note: Assigning Groups and/or IDs to the selected policy is optional."
- Set Maximum IDs Displayed Per Table:** Contains a text field labeled "IDs:" with the value "40".


At the bottom of the form are two buttons: "Submit" and "Reset".

2. Use the pull-down menu to select an existing Maximum IDs policy or select *Create new policy*.
3. If you chose a previously created policy, the name of that policy will display in the **Selected Policy** text field. If you are creating a new policy, type in a name for it.
NOTE: *You can also delete a previously selected Maximum IDs policy by clicking on the **Delete** button.*
4. Assign **Group(s) and ID(s)** to the policy. This step is optional. You can create a policy and assign Groups and IDs at a later time. If you wish to apply a universal policy to all users, select Enterprise.
5. Type in the **Maximum Number IDs** you wish to appear in reports. This must be a number between 1 and 250. The default is 25.
6. Click **Submit** to apply your changes.

5.1.7 Report Style

This screen lets you choose the style in which you want your reports to be displayed.

1. Go to **Advanced Settings – Report Settings** and click on the **Report Style** link.

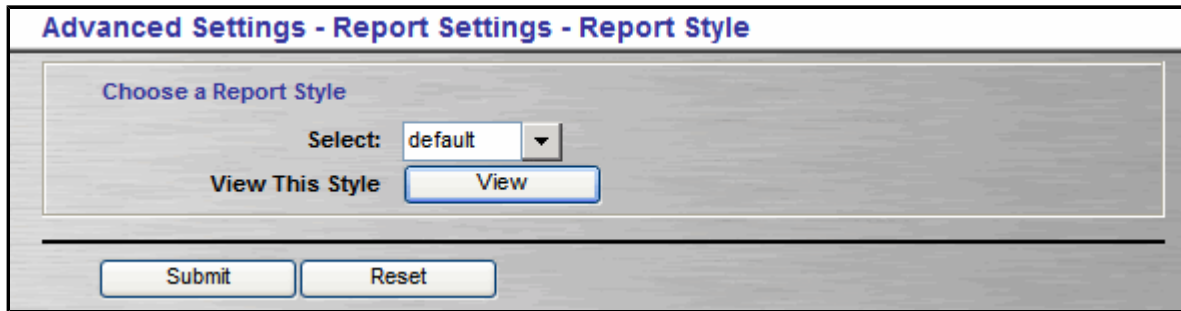

The screenshot shows a web interface titled "Advanced Settings - Report Settings - Report Style". Inside the main content area, there is a section titled "Choose a Report Style". Below this title, there is a label "Select:" followed by a dropdown menu currently showing "default". To the left of the dropdown is the text "View This Style". To the right of the dropdown is a button labeled "View". Below the "Choose a Report Style" section, there are two buttons: "Submit" and "Reset".

2. You can choose from two report styles: *classic* and *default*. Use the **View** button to review each style, and then **Select** the style you prefer.
3. Click **Submit** to apply your selection.

5.2 Run a Real Time Monitor Report

This report lets you monitor web traffic "live" as it is occurring on your network.

1. Go to **Reports - Real Time Monitor**.

The screenshot shows a web interface titled "Reports - Real Time Monitor". It is divided into three main sections: "Setup", "Groups and Ids", and "Categories".

- Setup:** Contains three dropdown menus: "Controls" set to "Start", "Max Results" set to "100 URLs", and "Update Frequency" set to "5 Seconds".
- Groups and Ids:** Features two text input fields labeled "Groups" and "IDs". The "Groups" field contains the text "Enterprise". To the right of these fields is a "Search" button.
- Categories:** Includes a checkbox labeled "All Categories" which is checked. Below it is a list box containing the following categories: Agriculture, Auction/Classified, Banners/Ads, Business Services, Chat, Construction, and Cults.

At the bottom of the interface are two buttons: "Submit" and "Reset".

2. Select *Start* in the **Controls** field to start a report.
3. Select the maximum number of URLs you want to see.
4. Select how frequently you want the screen to update in the **Update Frequency** field.
5. Select the Groups and/or IDs that you want to appear. If you know the Groups and/or IDs that you want selected, you can type them in the appropriate text boxes. Otherwise, click on the **Search** button to select the applicable Group(s) and/or ID(s). The following screen will pop up in a separate window.

6. Several options are available for selecting Groups and IDs. You can select one Group or ID, or you can select multiple Groups and/or IDs.
- **Selecting a Group or ID:** If you are only selecting one Group or ID, select that Group or ID by clicking on it so that it is highlighted, and click **Submit**.
 - **Selecting more than one Group:** If you are selecting multiple Groups, hold down the control key and click on the Groups you want so that they are highlighted, then click **Submit**.
 - **Selecting more than one ID:** If you are selecting multiple IDs, hold down the control key and click on the IDs to select them. If the IDs you want to select are located in different Groups, you must click the **Save Selected IDs** button before moving on to the next Group to select additional IDs. If you do not do this, your previous selections will be lost. When you are finished selecting all of your IDs, click **Submit**.
 - **Selecting both Group(s) and ID(s):** If you are selecting Groups and IDs (or even one Group and one ID), you must select your IDs first. Be sure to click on the **Save Selected IDs** button after making your ID selections in each Group. When you have finished selecting the ID(s), then make your Group selection(s). Click **Submit** when you have finished.

The Groups and IDs that you have selected will appear in the Assign Groups and IDs field.

NOTE: You can delete a Group or ID in the **Groups and IDs** field by highlighting it and hitting **Delete** on your keyboard.

7. Select the **Categories** you want displayed on the Real Time Monitor. If you want to see all categories, select the **All Categories** check box.
8. Click **Submit**, and your report will appear and continue updating.

Below is an example of the Real Time Monitor report.

ID	Date Time	Category Name	Web Page
pslis	Feb 21, 2007 8:48:47 AM	News and Media	http://www.foxnews.com/css/b_opera.css?1165942370
pslis	Feb 21, 2007 8:48:47 AM	News and Media	http://www.foxnews.com/css/tabs.css?1167243218
pslis	Feb 21, 2007 8:48:47 AM	News and Media	http://www.foxnews.com/css/main.css?1171308840
pslis	Feb 21, 2007 8:48:46 AM	News and Media	http://www.foxnews.com/css/root.css?1168014309
pslis	Feb 21, 2007 8:48:46 AM	News and Media	http://www.foxnews.com/
pslis	Feb 21, 2007 8:47:27 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/ten_q_fish_203.jpg
pslis	Feb 21, 2007 8:47:27 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/ncf_u_ferentz_203.jpg
pslis	Feb 21, 2007 8:47:20 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/blackhistory_q_kinglll_203.jpg
pslis	Feb 21, 2007 8:47:20 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/eticket_barrow_203.jpg
pslis	Feb 21, 2007 8:47:14 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0218/rpm_ap_harvick_martin_134.jpg
pslis	Feb 21, 2007 8:47:14 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0219/rpm_a_lastlapcrash_134.jpg
pslis	Feb 21, 2007 8:47:14 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0215/rpm_juan4_134.jpg
pslis	Feb 21, 2007 8:46:59 AM	Banners/Ads	http://espn-ak.starwave.com/photo/2007/0220/pg2_a_arod_jeter_203.jpg

NOTE: If you ever want to Pause, Continue, Reset, or Stop the report, you can do so from the Controls pull-down field on the **Reports - Real Time Monitor** Screen.

5.3 Run a High-level Summary Report

High-level reports give summarized information on employee Web use. They give you the information needed to locate problem areas, but do not drill down to show the actual URLs visited. Our detail audit (or low-level) reports, discussed later, give full URLs.

This section covers how to run a Site Analysis report, one of the more popular high-level reports. This report depicts the same Web site visits in three different ways:

- Total visits by 'acceptability' classification (acceptable, unacceptable, neutral)
- Total visits by content category (shopping, pornography, etc.)
- Total visits by user, per category.

NOTE: For descriptions of all high-level reports, please see Appendix B.

As indicated above, for purposes of this manual, we will select Site Analysis, but these instructions will work for any high-level report you wish to run. Now let's manually set up and run a Site Analysis report.

1. Go to **Reports – Manual**, and click on the high-level report that you would like to run.

Reports - Manual - Site Analysis

Settings

Report Delivery:

Report Type:

ID Type:

ID Presentation: ☐ Anonymous IDs

Abuse Thresholding: ☒ Disable ☐ Enable

Timeframe

Select Custom Timeframe

Aug 27, 2007 (start)

Aug 27, 2007 (stop)

Groups and IDs

Selected Groups Selected IDs

Enterprise

2. For **Report Delivery**, use the pull-down arrow to choose how the report will be delivered. You can choose to wait for the report, have it emailed, or saved to a directory.
3. Select the **Report Type**: *Interactive* or *Read-only*. (Read more about Interactive reports below.)
NOTE: *Interactive reports can only be run against data imported into the Wavecrest Database. They can not be used when running reports against the raw logfiles. For steps on how to use the Wavecrest Database and its advantages, see Section 3.*
4. Choose the **ID Type** to be displayed.
5. For **ID Presentation** in the report, you can choose to display IDs anonymously. Check the *Anonymous IDs* checkbox to do so.
6. If you have set **Abuse Thresholding** and want it to display on the report, click the **Enable** radio button.

7. Choose the **Timeframe** for your report. Use the pull-down to select either a predefined timeframe, or select *Custom* and set a **Start Date/Time** and **Stop Date/Time**.
8. Select the **Group(s) and ID(s)** that you wish to show in the report.
9. Click **Submit** to run the report.
10. If you selected *Enter other Email to Receive Report(s)* or *Select Other Directory to Save Report(s)* in the **Report Delivery** field, you will see a popup screen with a text box to type in the email address or directory path. In this case, enter the information, click **Submit**, and the report will run.

Report Highlights					
Description	Information				
Time To Create Report	00:00:41				
Data Source	Logs				
Total Bytes Read For Report	67,875,670				
Total Records Read For Report/Not Used	465,191 / 462,814				
Total IDs With Visits	38				
Total Visits	457				
Total Kilobytes	26,194				
Total Records With Errors	3,609				
Total Denied Visits	55				
Visits By Classification					
Classification Name	Download Time	Visits	%	0	228457
<u>Unacceptable</u>	22:51	457	100%		457
<u>Acceptable</u>	:00	0	0%		0
<u>Neutral</u>	:00	0	0%		0
Totals	22:51	457			
Visits By Category					
Category Name	Download Time	Visits	%	0	160321
1.Pornography (Unacceptable)	16:03	321	70%		321
2.Gambling (Unacceptable)	5:48	116	25%		116
3.Hate and Crime (Unacceptable)	1:00	20	4%		20
Totals	22:51	457			
Top Users or Workstations Activity					
ID Name	Download Time	Visits	%	0	64128
1.clark	6:24	128	28%		128

5.4 Run a Detail Audit Report

Detail Audit reports (or low-level reports) are designed to give detailed information on individual employees' Web use. These reports show the actual URLs visited.

This section provides instructions for running a User Audit Detail report, one of the more popular drill-down reports. A User Audit Detail report focuses on a single user. Every visit made by the user is listed separately in the main body of the report, and visits are listed chronologically by date and time.

NOTE: For descriptions of all Detail Audit reports, see Appendix B.

As indicated above, for purposes of this manual, we will use User Audit Detail, but these instructions will work for any detail audit report you wish to run. Now let's set up and run a manual User Audit Detail report.

1. Go to **Reports – Manual**, and click on the detail audit report you wish to run.

Reports - Manual - User Audit Detail

Settings

Report Delivery: Wait For Report

Report Type: Read-Only

ID Type: Login Names

Abuse Thresholding: ☒ Disable ☐ Enable

Hits-Visits: Visits Only (does not include jpg, gif, etc.)

URL Details: Single line URL

Timeframe

Select Custom Timeframe

Aug 27, 2007 8 A.M. (start)

Aug 28, 2007 5 P.M. (stop)

Groups and IDs

Selected Groups

Selected IDs dshrute

Search

Submit Reset

2. For **Report Delivery**, use the pull-down arrow to choose how the report will be delivered. You can choose to wait for the report, have it emailed, or saved to a directory.
3. Select the **Report Type**: *Interactive* or *Read-only*. (Read more about Interactive reports below.)
NOTE: Interactive reports can only be run against data imported into the Wavecrest Database. They can not be used when running reports against the raw logfiles. For steps on how to use the Wavecrest Database and its advantages, see Section 3.
4. Choose the **ID Type** to be displayed.
5. If you have set **Abuse Thresholding** and wish for it to display on the report, click the **Enable** radio button. (For more information on abuse thresholding, see Section 4).

6. Select whether you want **All Hits** or **Visits Only** displayed on the report.
NOTE: Choose *Visits Only* if you want the report to count and show only true visits, i.e., actual user clicks. Doing so will exclude all other types of hits, e.g., banners, ads, audio, etc. Choose *All Hits* if you want reports to show all types of hits, solicited or unsolicited.
7. For **URL Details**, choose how you want the URLs to display in the report. The default setting is *Single Line URL*, which means that URLs will be 'snipped' if they are longer than one line. If full URLs are needed, you can choose *Full URLs (wrapped when necessary)*. This means that the full URL will be shown, even if it takes two or three lines to display it.
8. Choose the **Timeframe** for your report. Use the pull-down to select either a predefined timeframe, or select *Custom* and set a **Start Date/Time** and **Stop Date/Time**.
9. Select the **Group** or **ID** that you wish to show in the report.
CAUTION: You cannot run a *User Audit Detail* report on the "Enterprise" group. You can run the report on other groups, but remember that this means a user audit detail report will run on each user in the selected group.
10. Click **Submit** to run the report.
11. If you selected *Enter other Email to Receive Report(s)* or *Select Other Directory to Save Report(s)* in the **Report Delivery** field, you will see a popup screen with a text box to type in the email address or directory path. In this case, enter the data, click **Submit**, and the report will run.

665)	May 27, 1997 9:12:21 AM	Hardware and Software	ftp://ftp.microsoft.com/bussys/winnt/winnt-public/fixes/usa/nt40/ussp3/i386/
666)	May 27, 1997 9:13:44 AM	Personals and Dating	http://www.webpersonals.com/read/read_ad.phtml?num=220613
667)	May 27, 1997 9:15:23 AM	Social Networking	http://www.geocities.com/southbeach/lights/6818
668)	May 27, 1997 9:16:23 AM	Social Networking	http://www.geocities.com/southbeach/lights/6818/linda.html
669)	May 27, 1997 9:17:13 AM	Personals and Dating	http://www.webpersonals.com/read/read_ad.phtml?num=216859
670)	May 27, 1997 9:17:42 AM	Search Engines	http://www.yahoo.com/
671)	May 27, 1997 9:17:47 AM	Search Engines	http://www.yahoo.com/docs/yahootogo/index.html
672)	May 27, 1997 9:17:53 AM	Regional Information	http://local.yahoo.com/local/
673)	May 27, 1997 9:17:58 AM	Auction/Classified	http://classifieds.yahoo.com/newjersey/personals/
674)	May 27, 1997 9:18:03 AM	Auction/Classified	http://classifieds.yahoo.com/cache/newjersey/personals/alt.html
675)	May 27, 1997 9:21:07 AM	Internet Services	http://home.earthlink.net/%7ewn/g.htm
676)	May 27, 1997 9:26:17 AM	Financial	http://www.secapl.com/cgi-bin/qs
677)	May 27, 1997 9:26:25 AM	Financial	http://qs.secapl.com/cgi-bin/qs
678)	May 27, 1997 9:27:35 AM	Weather	http://www.intellicast.com/weather/ewr/

5.5 Run a Site Analysis Bandwidth Report

The Site Analysis Bandwidth report is one of the Additional Management Reports provided by the product. These reports, which supplement the high and low-level reports discussed above, cover the areas that managers, HR and IT find useful when managing employee Web use.

The Site Analysis Bandwidth Report is similar to the Site Analysis report, but it focuses on bandwidth consumption instead of Web site content. It breaks down bandwidth usage first by acceptability classification, then by category within each classification, and then by user within each category.

NOTE: For descriptions of all Additional Management Reports, see Appendix B.

To run your report, follow the steps below. These instructions will work for any Additional Management Report you wish to run.

1. Go to **Reports – Manual** and click on the **Site Analysis Bandwidth** link under **Additional Management Reports**.

Reports - Manual - Site Analysis Bandwidth

Settings

Report Delivery:

Report Type:

ID Type:

ID Presentation: ☐ Anonymous IDs

Timeframe

e.g. Aug 21, 2007 12:00:00 AM to- Aug 27, 2007 11:59:59 PM

Groups and IDs

Selected Groups:

Selected IDs:

2. For **Report Delivery**, use the pull-down arrow to choose how the report will be delivered. You can choose to wait for the report, have it emailed, or saved to a directory.
3. Select the **Report Type**: *Interactive* or *Read-only*. (Read more about Interactive reports below.)
NOTE: *Interactive reports can only be run against data imported into the Wavecrest Database. They can not be used when running reports against the raw logfiles. For steps on how to use the Wavecrest Database and its advantages, see Section 3.*
4. Choose the **ID Type** to be displayed.
5. For **ID Presentation** in the report, you can choose to display IDs anonymously. Check the *Anonymous IDs* checkbox to do so.
6. Choose the **Timeframe** for your report. Use the pull-down to select either a predefined timeframe, or select *Custom* and set a **Start Date/Time** and **Stop Date/Time**.

7. Select the **Group(s) and ID(s)** that you wish to show in the report.
8. Click **Submit** to run the report.
9. If you selected *Enter other Email to Receive Report(s)* or *Select Other Directory to Save Report(s)* in the **Report Delivery** field, you will see a popup screen with a text box to type in the email address or directory path. In this case, enter the data, click **Submit**, and the report will run.

Below is an example of a Site Analysis Bandwidth report.

Report Highlights					
Description		Information			
Time To Create Report		00:01:14			
Data Source		Import Data			
Total IDs W/ith Visits		30,481			
Total Visits/Hits		226,169 / 2,198,516			
Total Kilobytes		13,334,585			
Total Denied Visits		1,842			
Total Legal Liability Visits/Hits		710 / 9,648			
Program Downloads Hits/Kilobytes		1,800 / 397,792			
Bytes Read By Classification					
Classification Name	Kilobytes Read	%	0	3,087,850	6,175,701
Acceptable	6,175,701	46%			6,175,702
Neutral	4,387,162	33%			4,387,162
Unacceptable	2,771,720	21%			2,771,720
Totals	13,334,585				
Bytes Read By Category					
Category Name	Kilobytes Read	%	0	745,718	1,491,436
1.IP Address (Neutral)	1,491,436	14%			1,491,436
2.Hardware and Software (Acceptable)	651,538	6%			651,538
3.Web Email (Unacceptable)	632,690	6%			632,690
4.News and Media (Acceptable)	417,098	4%			417,098
5.Sports (Unacceptable)	340,609	3%			340,609
6.Entertainment (Unacceptable)	329,997	3%			329,997
7.Financial (Unacceptable)	299,577	3%			299,577
8.Search Engines (Acceptable)	226,708	2%			226,708
9.Shopping (Unacceptable)	213,088	2%			213,088
10.Non-Profit Organizations (Neutral)	209,019	2%			209,019
11.Reference (Acceptable)	195,593	2%			195,593
12.Internet Services (Acceptable)	186,701	2%			186,701
13.Travel (Unacceptable)	166,005	2%			166,005
14.Pornography (Unacceptable)	116,978	1%			116,978
15.Health and Medicine (Acceptable)	106,383	<1%			106,383

5.6 Schedule Reports

Reports can be scheduled to run daily, weekly or monthly and can be sent to the recipient's email address or saved to a directory that the recipient can access.

1. Go to **Reports – Schedule** and click on the **Create** link.
2. Choose the type of report you wish to schedule and click on that report's link. For purposes of this manual, we will schedule to run a **User Audit Detail** report.

Reports - Schedule - Create - User Audit Detail

Settings

Report Name: dshrute Weekly Report

Report Delivery: Enter Other Email to Receive Report(s)
 Enter email address(es) here

Report Type: Interactive

ID Type: Login Names

Abuse Thresholding: ☒ Disable ☐ Enable

Hits-Visits: Visits Only (does not include jpg, gif, etc.)

URL Details: Single line URL

Timeframe

Last Week
 e.g. Mar 16, 2008 12:00:00 AM -to- Mar 22, 2008 11:59:59 PM

When To Run

12 A.M. (hour of the day)
 Sunday (day of the week)

Groups and IDs

Selected Groups Selected IDs

dshrute
 Search

Submit Reset

3. In the **Report Name** field, type in a name for the report.
NOTE: If you do not give the report a name, it will be given a default name.
4. For **Report Delivery**, use the pull-down arrow to choose how the report will be delivered. For scheduled reports, you can have the report emailed to the group(s) recipient(s) or saved to a directory that the group(s) recipient(s) can access. You also have the option to enter one or more email addresses to receive the report. If you select this option, a text box will appear where you can enter them. If you are entering more than one email address, separate each with a comma or semicolon.
5. Select the **Report Type**: *Interactive* or *Read-only*.
NOTE: Interactive reports can only be run against data imported into the Wavecrest Database. They can not be used when running reports against the raw logfiles. For steps on how to use the Wavecrest Database and its advantages, see Section 3.
6. Choose the **ID Type** to be displayed
7. If you have set **Abuse Thresholding** and want it to display on the report, click the **Enable** radio button.

8. Select whether you want **All Hits** or **Visits Only** displayed on the report.
***NOTE:** Choose Visits Only if you want the report to count and show only true visits, i.e., actual user clicks. Doing so will exclude all other types of hits, e.g., banners, ads, audio, etc. Choose All Hits if you want reports to show all types of hits, solicited or unsolicited.*
9. For **URL Details**, choose how you want the URLs to display in the report. The default setting is *Single Line URL*, which means that URLs will be 'snipped' if they are longer than one line. If full URLs are needed, you can choose *Full URLs (wrapped when necessary)*. This means that the full URL will be shown, even if it takes two or three lines to display it.
10. Choose the **Timeframe** for your report.
11. Select the **When To Run** time for the report.
12. Select the **Group** or **ID** that you wish to show in the report.
***CAUTION:** You cannot run a User Audit Detail report on the "Enterprise" group. You can run the report on other groups, but remember that this means a user audit detail report will run on each user in the selected group.*
13. Click **Submit** to set the report to run at its scheduled time.

5.6.1 Modify Scheduled Reports

1. Go to **Reports – Schedule** and click on the **Modify** link.
2. Click on the scheduled report you wish to modify.

Reports - Schedule - Modify

Scheduled Reports

[# 1, Last Week on Monday @ 5 P.M., Site Analysis, admin](#)

[dshrute Weekly Report](#)

[jsmith Weekly Report](#)

3. Make your modifications and click **Submit** to apply your changes.

5.6.2 Delete Scheduled Reports

1. Go to **Reports – Schedule** and click on the **Delete** link.
2. Select the radio button for the report you wish to delete.

Reports - Schedule - Delete

Scheduled Reports

☐ # 1, Last Week on Monday @ 5 P.M., Site Analysis, admin

☒ dshrute Weekly Report

☐ jsmith Weekly Report

3. Click **Submit** to apply your deletions.

5.7 Using Interactive Reports

Interactive Reporting allows users to drill-down and get more detailed information on employees' Web use by simply clicking on a report's elements. For example, from a high-level report, such as Site Analysis, you can simply click on an ID Name, and a User Audit Detail report will automatically begin running on the user.

They are also delivered differently. For example, instead of receiving an attachment of the report, recipients will receive a link. A password is needed to retrieve the reports because they are password protected.

To use Interactive Reporting, you must enable the Wavecrest Database. Interactive Reports can only be run against data imported into the Wavecrest Database. They can not be used when running reports against the raw logfiles. For steps on how to use the Wavecrest Database, see Section 3.

1. When an Interactive Report is emailed to a recipient or saved in the directory, the recipient will receive a link (or two links depending on your server settings) to the report.

Click on the link below to retrieve the report with the following information:

Type of Report: Site Analysis
Created By: admin / Your Company Name Goes Here
Server Alias Name: Cyfin Reporter
Current Date/Time: Apr 25, 2007 9:56:45 AM
Thresholding: Disable
Group: Enterprise
IDs: All IDs
Report Start Date/Time: Sep 1, 2004 12:00:00 AM
Report Stop Date/Time: Nov 30, 2004 11:59:59 PM

If for any reason the link does not work, please contact your administrator.

2. To open the report, click on the appropriate link. You will then be asked to enter a password to retrieve the report. The default password is "password." This password can be changed on the **Report Settings - Interactive Reports** screen.

Authentication Required

A password is required to view this report. If you do not know the password, please contact your administrator.

Enter Password:

3. If you received a Site Analysis report, it would appear like the report below.

Top Users or Workstations Activity					
ID Name	Download Time	Visits	%	0	161,351
1.143.18.80.19	11:04:55:09	322,703	1%		322,703
2.131.190.1.126	9:22:28:21	286,167	<1%		286,167
3.143.18.63.2	9:06:07:18	266,546	<1%		266,546
4.155.124.113.178	6:00:38:18	173,566	<1%		173,566
5.155.124.113.134	5:03:50:27	148,609	<1%		148,609
6.155.123.22.4	4:14:03:18	132,066	<1%		132,066
7.143.26.5.22	3:04:11:12	91,424	<1%		91,424
8.143.34.5.200	2:11:09:15	70,985	<1%		70,985
9.155.124.25.14	2:06:49:09	65,783	<1%		65,783
10.143.26.84.112	1:23:35:09	57,103	<1%		57,103
11.172.17.74.183	1:21:22:12	54,444	<1%		54,444
12.155.118.61.226	1:19:20:12	52,004	<1%		52,004

4. From here, you may decide that you want to drill-down to get more detail on a user's Web activity. Click on the user's ID (or for this example, the IP address). By clicking on **143.18.80.19**, you have submitted a request to get a User Audit Detail report on that particular user. The below progress meter will appear. If there are any other jobs in the queue, this screen will indicate how many jobs are in the queue.

Report Request Status

35%

If you do not want to wait for this report, enter your email address below. A link to the report will be emailed to you when it is complete.

Email Address:


Submit

Cancel

5. If there is a lot of data or if there are multiple jobs in the queue and you do not want to wait for the report, you have the option of entering your email address to have the report emailed to you when it is complete.

5.8 Review Report Policies

If you ever want to review your report settings, you can do so at the **Reports – Policy** screen.

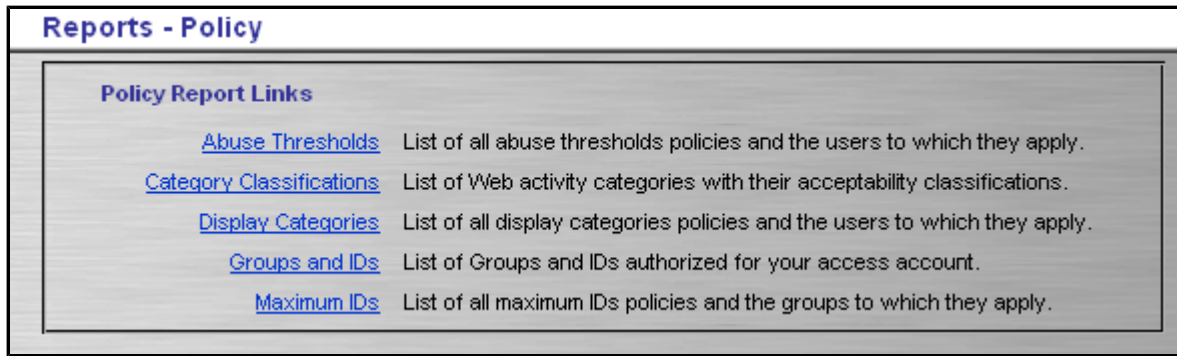

This screen contains links to policy-related information that you can use to customize reporting.

- The **Abuse Thresholds** link indicates how many visits are acceptable before 'abuse' is considered to have occurred.
- The **Category Classifications** link shows the acceptability classifications (ratings) that your organization has assigned to the Web activity categories. NOTE: These can be default settings.
- The **Display Categories** link indicates which category tables will be displayed in reports.
- The **Groups and IDs** link indicates the groups and users that you can create reports on.
- The **Maximum IDs** link indicates how many user IDs will appear in category tables of reports.

6.0 Administrative Features

This section covers additional administrative features to be used and maintained by the product's administrator. Before getting started on this section, be sure to complete the Getting Started section of the manual first. It contains vital instructions that need to be completed before moving on to creating accounts or scheduling the download of the URL list.

Administrative Features includes instructions on how to:

- **Create, Modify, and Delete Administrator and Operator Accounts** – Instructions on how to manage administrator and operator accounts.
- **Download the URL List** – Covers how to manually download the list and schedule it for download daily.
- **Download Product Updates** – Instructions on how to check for updates and download them when needed.
- **Check Product News** – Learn how to read product news and change the settings.

As mentioned previously in Reporting, assigning operator accounts to those that need reports regularly can save IT administrators considerable time and effort. Individuals with operator accounts can access the product, but only via a limited menu that lets them run reports on the groups and users that they have been authorized to review. They cannot make or change administrative settings.

It is important to maintain the latest downloads of the product's URL list and upgrades. Keeping the list current and preventing it from expiring will reduce the number of Web sites listed in the "Other" (unidentified) category. Taking advantage of upgrades will keep the product running smoothly.

Finally, product news will let you know if there are any new critical product releases or current Internet issues that may affect your Web-use management policies.

6.1 Create Administrator and Operator Accounts

Two types of accounts can be issued: administrator accounts and operator accounts. Administrator account users have full access to and control of the product. Operator account users only have access to a limited menu that lets them create, run and review reports.

1. To create an administrator or operator account, go to **Administration – Access Accounts** and click on the **Create** link.

Administration - Access Accounts - Create

Create Access Account

Account Name: dshrute

Authentication: Create Password [dropdown] [password field]

Account Type: Operator [dropdown]

Full Name: Dwight Shrute

Email Address: dshrute@theoffice.com

Home Directory: C:\TEMP [Browse]

Groups:

- Engineering (5)
- Downstairs (1)
- Upstairs (1)
- SalesSupportGroup (1)
- Domain Admins (1)
- ISA Server Group (1)
- Util Users (1)


[Submit] [Reset]

2. Type in the **Account Name** (or login name) to be used by the account owner. If you plan to use the Active Directory Authentication option make sure the account name matches the Active Directory account name exactly.
3. In the **Authentication** field, select *Use Active Directory* or *Create Password*. If you select *Create Password*, a text box will appear where you will type in a password for the account.
4. Use the pull-down arrow to choose either *Administrator* or *Operator* for the type of account you are creating.
5. Type in the **Full Name** of the account user.
6. Type in the **Email Address** of the account user. For operator accounts, reports covering Groups selected during the report-creation process will be sent to this email address. This email address overrides the default administrator email account entered during product setup. It also serves as the “From” address when the account owner is logged in and chooses to email reports to other recipients.
7. Type in or browse to the **Home Directory** that has been set up for the account owner to store reports in.
8. Select the **Group(s)** for which the account owner will be authorized to create and view reports and perform other functions (if applicable). To select more than one group, hold down the Ctrl key and click on each **Group**.
***NOTE:** The text box displays the (optional) user-grouping structure created during Groups and IDs setup. You can learn how to set up Groups and IDs in Section 2 of the manual.*
9. Click **Submit** to create the account.

6.2 Modify Administrator and Operator Accounts


This feature lets you modify a previously established administrator or operator account.

1. Go to **Administration – Access Accounts** and click on the **Modify** link.

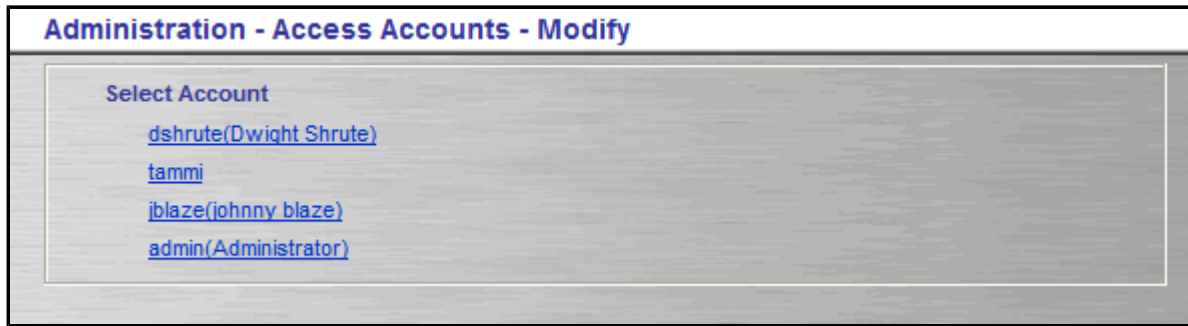

The screenshot shows a web interface titled "Administration - Access Accounts - Modify". Inside a light gray box, there is a section labeled "Select Account" with four blue, underlined links: [dshrute\(Dwight Shrute\)](#), [tammi](#), [jblaze\(johnny blaze\)](#), and [admin\(Administrator\)](#).

2. Click on the account you wish to modify.

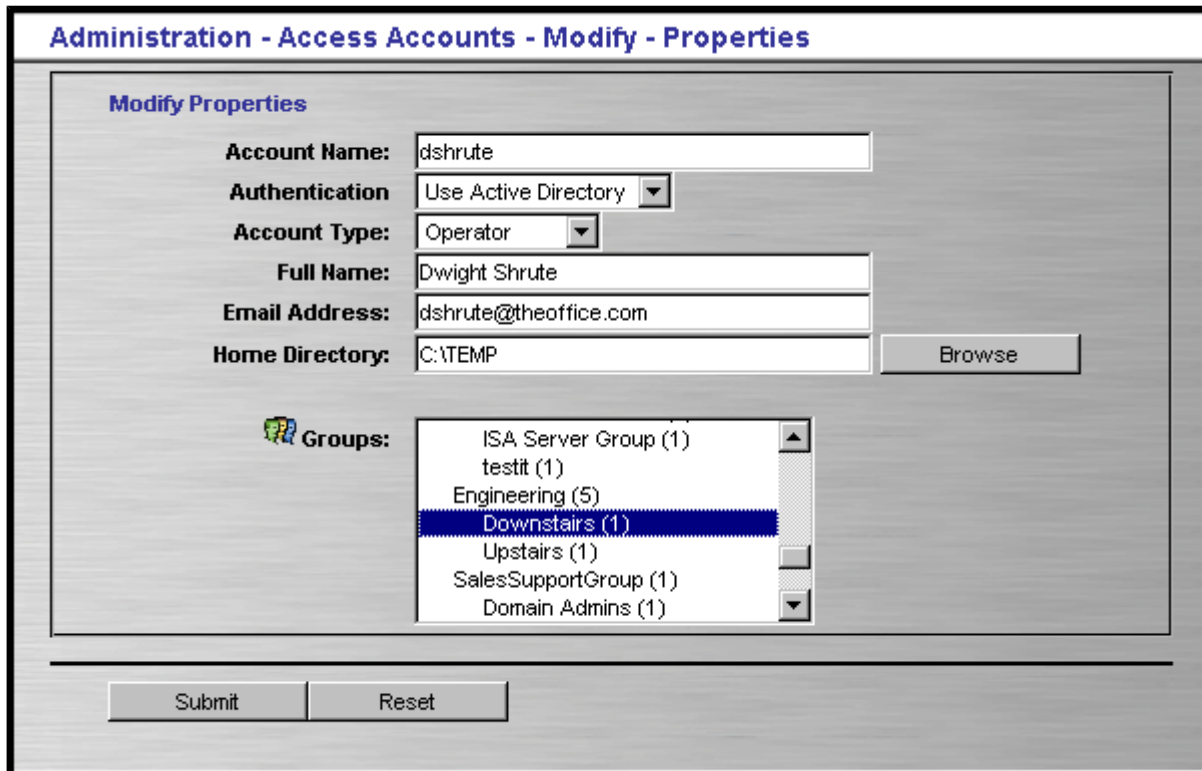

The screenshot shows a web interface titled "Administration - Access Accounts - Modify - Properties". Inside a light gray box, there is a section labeled "Modify Properties". It contains several form fields and a list:

- Account Name:** dshrute
- Authentication:** Use Active Directory (dropdown menu)
- Account Type:** Operator (dropdown menu)
- Full Name:** Dwight Shrute
- Email Address:** dshrute@theoffice.com
- Home Directory:** C:\TEMP (with a "Browse" button next to it)
- Groups:** A list of groups with "Downstairs (1)" selected. The groups are: ISA Server Group (1), testit (1), Engineering (5), Downstairs (1), Upstairs (1), SalesSupportGroup (1), and Domain Admins (1).

At the bottom of the form are two buttons: "Submit" and "Reset".


3. Make your changes and click **Submit** to apply them.

6.3 Delete Administrator and Operator Accounts

Delete previously established administrator or operator accounts.

NOTE: *The administrator account cannot be deleted if he/she is currently logged in.*

1. Go to **Administration – Access Accounts** and click on the **Delete** link.

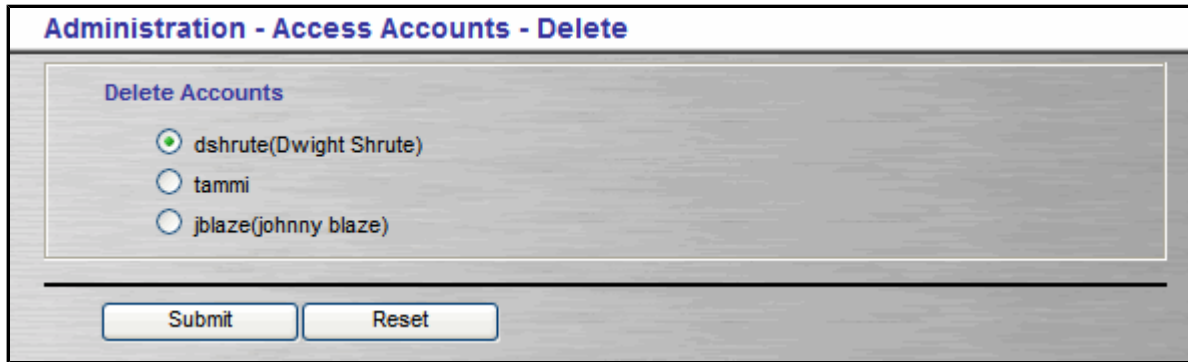

Administration - Access Accounts - Delete

Delete Accounts

☒ dshrute(Dwight Shrute)

☐ tammi

☐ jblaze(johnny blaze)

2. Select the radio button for the account that you wish to delete and click **Submit**.

6.4 Download the URL List

The Wavecrest URL list is updated daily. In order to receive these daily updates, you must either download the URL list manually or configure the product to download it automatically once a day.

6.4.1 Manual Download

1. Go to **Administration – URL List** and click on the **Manual** link.

The screenshot shows a web interface titled "Administration - URL List - Download - Manual". It contains two main sections. The first section, "Manually Download Latest URL List", has a "Status:" label followed by a green bar containing the text "Category Resolution is ready". Below this is an "Update URL List:" label and a "Download Now" button. The second section, "Direct Download", has a "Product Override" label followed by a blue hyperlink "Wavecrest Downloads".

2. If the URL list is expired (older than 45 days), the **status** bar will be red with a message stating that the list is expired. If the URL list is about to expire (older than 30 days), the **status** bar will be yellow and will state how many days old your list is. If you get either of these messages, you should download the URL list immediately. These messages will also appear when you log in. If your latest list was downloaded within 30 days, the status bar will be green as shown above.

NOTE: To avoid the risk of having the list expire, we recommend that you schedule the URL list to automatically download daily. See Section 6.4.1 for instructions on scheduling the download.

3. Click on the **Download Now** button to download the latest version of the list. The following screen will pop up and the **Download Progress** bar will show the download's progress percentage.

The screenshot shows a web interface titled "Administration - URL List - Download - Download Now". It contains a section titled "Updating the Wavecrest URL List". Below this title are four lines of information: "Download Type: Wavecrest URL List Update", "Filename: 20070215.war", "Download Progress: 100% @ 0 KB/s" (with a blue progress bar), and "Textual Progress: Loading new Wavecrest URL List. Please Wait...". At the bottom of the window is a "Close Window" button.

4. You will receive a confirmation statement in the **Textual Progress** area when the list is fully downloaded. When this occurs, you can close the window.

NOTE: The Product Override link should only be used in the event that the URL list download from the product is unsuccessful. This link will take you to a Web page where you will find the URL list download and instructions for downloading from the site.

6.4.2 Schedule Download

1. Go to **Administration – URL List** and click on the **Schedule** link.

The screenshot shows a web interface titled "Administration - URL List - Download - Schedule". Inside, there is a section titled "Schedule URL List Download". This section contains three fields, each with a pull-down arrow:

- Automatic Update:** A pull-down menu currently showing "Yes".
- Hour:** A pull-down menu currently showing "3", followed by a time selection pull-down menu currently showing "P.M."
- Confirmation Email:** A pull-down menu currently showing "No".


Below these fields, there are two buttons: "Submit" and "Reset".

2. Use the pull-down arrow to select Yes in the **Automatic Update** field to enable the scheduled download.
***NOTE:** If you ever want to disable the scheduled download, change the **Automatic Update** option to No and click **Submit**. This will turn off the automatic update.*
3. Choose the **Hour** that you want the automatic update to occur by using the pull-down arrows.
4. If you would like a **Confirmation Email** to be sent to the administrator confirming that the URL list download was successful, select Yes. If not, select No.
5. Click **Submit** to apply your settings.

6.5 Download Product Updates

Use the Product Update screen to check for new product versions and download the latest release.

1. Go to **Administration – Product Update**. This screen will tell you if there are any current updates to the version of your product.

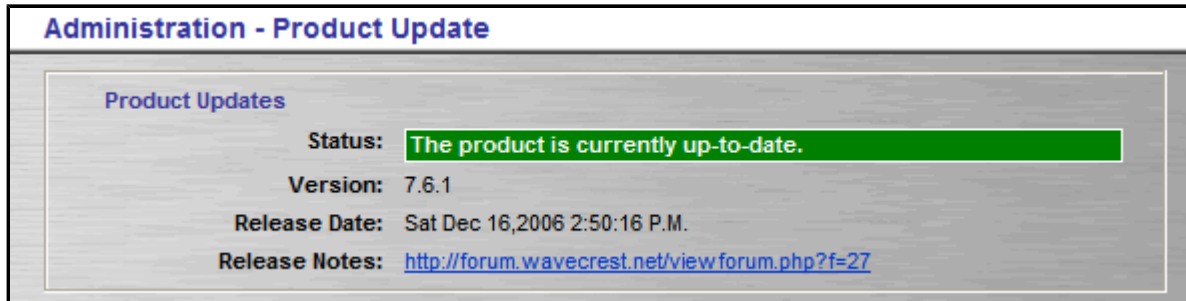

2. The **Status** bar will let you know if there are any new updates or if your product is currently up-to-date. If updates are available, click on **Download Now** to upgrade the product.

6.6 Check Product News



The Product News system allows you to receive critical information on new product updates and relevant news items that may affect your Internet management policies. The default news settings lets you receive news items in the product and displays the last 25 news items received. You will know you have a new news item to read when a yellow icon appears in the right-hand corner of the interface. Click on the icon to view the new news item. Once you have read the news item, the icon will disappear.

1. To change your news settings, go to **Administration – Product News** and click on the **Setup** link.

The screenshot shows a web form titled "Administration - Product News - Setup". It contains two main sections. The first section, "Enable or Disable News", has a "Receive News:" label followed by two radio buttons: "Enable" (which is selected) and "Disable". The second section, "In-Product Notification", has a "Display Last:" label followed by a dropdown menu currently set to "25 news items". At the bottom of the form are two buttons: "Submit" and "Reset".

2. If you do not want to receive news through the product, you can choose to disable it by clicking on the **Disable** radio button.
***NOTE:** If you decide to disable product news, you must remember that only the administrator will receive these critical updates via email. Critical news items will also be posted on the technical support forum.*
3. You can also choose how many news items you want displayed when viewing your news. Use the pull-down arrow to make your selection.
4. Click **Submit** to apply your changes.

To view your news:

1. Go to **Administration – Product News** and click on the **Viewer** link.

The screenshot shows a web form titled "Administration - Product News - Viewer". It displays a section titled "25 Last News Items". Below this title, the first news item is listed: "1. Oct 17, 2006 2:48:46 PM [New U.S. Law for Online Gambling](#)".

2. Click on the links to read each news item.

6.7 Setup and Manage an Array

The array feature allows you to have multiple installs on different servers and manage them from one primary location. For example, once you set up your array, you can classify categories in the installation on your primary server and all installations on your secondary servers will be updated to exactly match that of the primary. This will keep you from having to update each installation every time you need to make a change in the product. Instead, you will manage your settings from one location (or server). This will be called your primary server.

There are a few screens that can not be controlled solely from the primary server. In other words, any settings or changes you make to the following screens will have to be completed separately in each installation on your primary and secondary servers in your array. They are:

- Memory Setup
- All Logfile and Data Manager screens
- All Manual and Schedule Report screens
- Report and Language Settings

NOTE: This feature is currently unavailable for clients who import Groups and IDs from a text file.


1. Before getting started with setting up an array, make sure that each installation is the same product and version.
2. Next, you must decide which server you want to be your primary in the array. Once you have decided which server will be your primary, log in to your Wavecrest product on that machine. This is the machine where you will configure all of your settings.

NOTE: If you are upgrading your product installs from a previous version to Cyfin 7.8.0 or CyBlock 5.8.0, you will still need to designate one server as your primary. However, in order for your secondary servers to exactly match that of your primary, you will have to go to each product screen on the primary server (make changes if needed) and click Submit, which will send the settings from the primary server to your secondary servers and update them to match.

Your other option is to upgrade the software on your primary server, uninstall the Cyfin or CyBlock software on your secondary servers, and download a new product install. If you have any questions about upgrading and using this feature, please do not hesitate to contact technical support either toll-free at 1-877-442-9346, ext. 4 or 321-953-5351, ext. 4.

3. Go to **Setup - Array**.

CAUTION: This screen will be accessible from all of your product installations, but only use this screen from the installation on your primary server. Do not use this screen on any of your secondary installations.

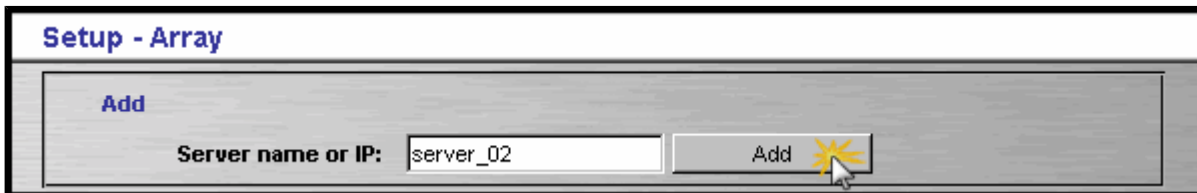

4. Add a secondary server to the array by typing in the **Server Name or IP Address** in the text field and click **Add**. You should immediately see the primary server name or IP address and the secondary server name or IP address listed in the **Server** section as shown below. Repeat this step until you have added all of your secondary servers to the array.

Setup - Array

Add

Server name or IP:

Servers

☒ server_01	Primary	Ready
☐ server_02	Secondary	Ready
☐ server_03	Secondary	Ready

- Now you are ready to begin setting up the product on your primary server. Before you do this, make sure that all of your secondary servers in the array have a status of **Ready** as shown in the image above. If they do not have a **Ready** status, the settings in the product installations on those servers will not be updated.
- If at any time you want to delete a server in the array, select that server's radio button and click **Delete**.

7.0 Other Features

7.1 Quick Start


Quick Start provides you with links to the most basic setup screens that you need to get the product up and running. Below the basic setup is a link to this Administrative Guide for the product that will step you through getting the product started. It also contains detailed instructions on some of the product's features.

7.2 License

You will need to enter your product license after you purchase or renew the product license.

NOTE: *The default evaluation key is valid for 30 days after install.*

1. To enter your license information, go to **Setup** and click on the **License** link.

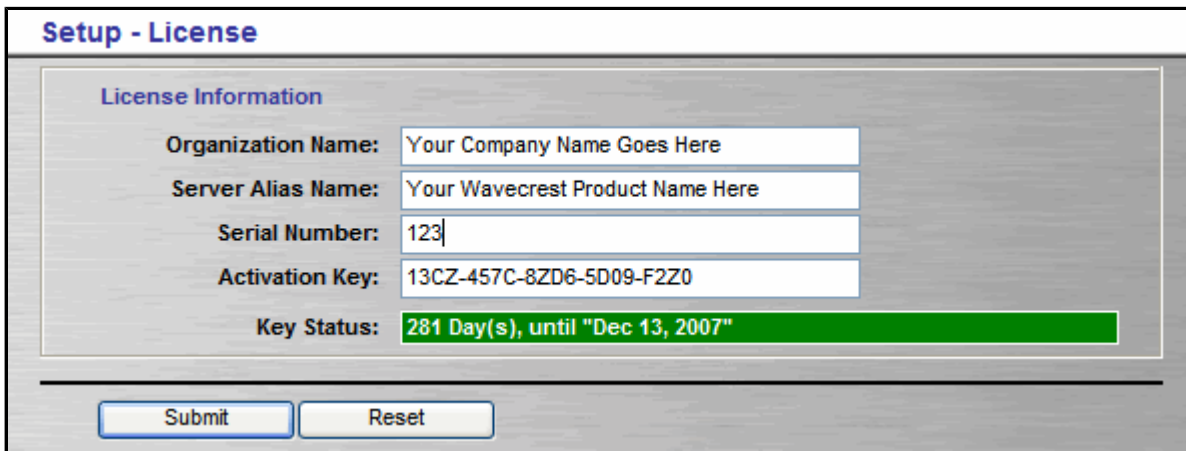

The screenshot shows a window titled "Setup - License". Inside, there is a section titled "License Information". It contains five fields: "Organization Name" with the placeholder "Your Company Name Goes Here", "Server Alias Name" with the placeholder "Your Wavecrest Product Name Here", "Serial Number" with the value "123", "Activation Key" with the value "13CZ-457C-8ZD6-5D09-F2Z0", and "Key Status" with the value "281 Day(s), until 'Dec 13, 2007'". At the bottom of the window are two buttons: "Submit" and "Reset".

2. Enter your organization's name in the **Organization Name** text entry box.
3. Enter the server name (or its IP Address) that the product will use.
NOTE: *This is merely the server's "friendly" alias name, it has no bearing on product actions.*
4. Enter your serial number in the **Serial Number** text entry box if you have purchased the product. (This can be found on the certificate provided at time of purchase. During product evaluation, the serial number default setting should not be changed.)
5. Enter your activation key in the **Activation Key** text entry box. (This can be found on the certificate provided at time of purchase. During product evaluation, the activation key default setting should not be changed.)
6. Click **Submit** to apply changes, or click **Reset** to reload previous values.
CAUTION: *If you click **Reset**, the current changes will not be saved, the previous setup will be reset, and all changes will be lost.*

7.3 Job Queue

The job queue displays a prioritized list of jobs in process. If there are no open jobs, when you go to the job queue, the screen will be blank and a message indicating the system is currently idle will appear.

The job queue automatically assigns priorities and performs the jobs in a sequence that reflects those priorities. This design ensures that reports are based on the latest available data.

The job queue runs one job at a time. A job that is running will always be at the top of the list, and a progress meter will show percent completion.

When a new job is initiated, the product automatically places it in the queue in accordance with its priority. Lower priority jobs are "bumped down" if appropriate.

- 1. To check the Job Queue, go to **Administration – Job Queue**.
- 2. You will see the list of jobs and their status on the screen.

Administration - Job Queue

Queue Information

Type	Description	Percent	Owner	Delete
List	Wavecrest URL List Update	0%	System	☐
GAI	Importing Users from an Active Directory Server	Queued	System	☐
Report	Site Analysis	Queued	System	☐
Report	User Audit Detail	Queued	System	☐

Select All

Deselect All

Submit

Reset

- 3. If you want to delete any of the jobs, check the **Delete** box and then, click **Submit**.
NOTE: Administrators can delete any job in the job queue. Operators can delete only the types of jobs that are authorized in their accounts, i.e., typically reports.


7.4 Help

7.4.1 Documentation

This area provides links to various documents that help you with the product and Web-use management in general. It includes links to this Administrative Manual, product support, Wavecrest's Web site and other helpful documents. Get to this screen by going to **Help - Documentation** on the menu.

7.4.2 Profiling

If you ever experience difficulties that can't be resolved via on-line Help, Technical Support may ask you to activate the product's "profiling" mode via the Profiling screen. When profiling is activated, the product will generate a considerable amount of data to help Technical Support resolve the issue. When the data is generated, it will be sent to a special file (sprofile.htm) for subsequent transmission to Technical Support via email (support@wavecrest.net). If you are ever asked to turn on profiling, go to **Help – Profiling** and follow Tech Support's instructions.

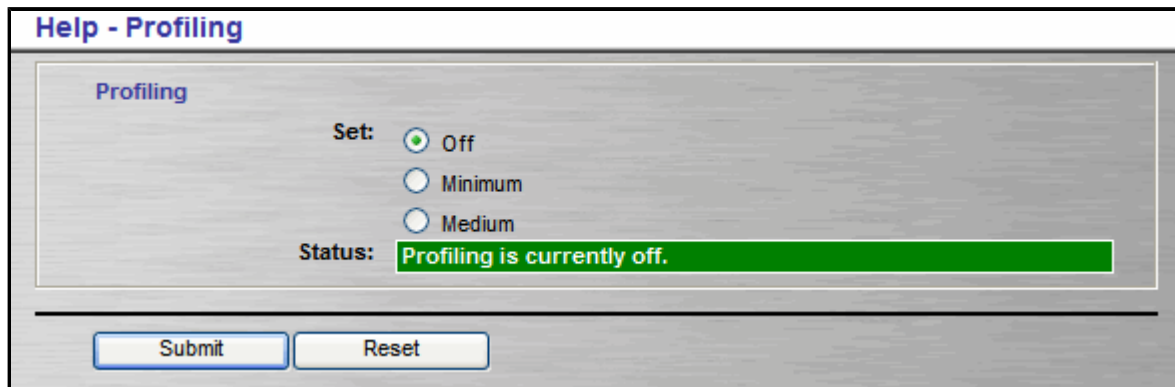

7.4.3 Support Forum

On our technical support forum, you can connect with some of our 3,500 customers. You can peruse the forum for helpful tips in using the product, or you can post your own questions and comments. If you go to **Help – Support Forum** on the menu, it will take you directly to the forum.


7.4.4 System Information

7.4.4.1 System Status

System Status tells you whether or not the product's Application Server is ready. If the Overall System Status message is colored green (OK), you can click on the dynamic Quick Link which will take you directly to the **Reports - Manual - Site Analysis** screen. There you can quickly generate a sample Site Analysis Report.

If the Overall System Status message is colored yellow or red, the Quick Link will take you to the specific screen that relates to the error condition. There you can quickly resolve the issue.

To check your System Status, go to **Help – System Information** and click on the **System Status** link.

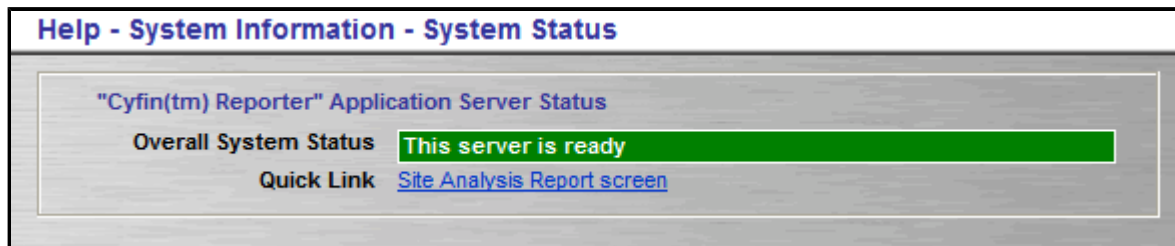

7.4.4.2 Server Information

Server Information provides important items of information about the product's application server. Included are: the type and version of application server, type of proxy server or firewall, installation directory path, virtual memory size, license information, report language, etc. Several of these informational items are derived from one-time Setup actions. Others were developed during the installation process. To view your Server Information, go to **Help – System Information** and click on the **Server Information** link.

7.4.4.3 Check URL

This feature can be used to check the category of any URL in the product's configured list(s). It is particularly useful after you create a custom category. It enables you to verify that the URLs you entered in the custom category have been correctly assigned to that category.

1. Go to **Help – System Information** and click on the **Check URL** link.
2. Enter the URL you want to check.
3. Click **Submit** and the other fields will fill in with information about the URL.

Help - System Information - Check URL

This feature can be used to check the category of any URL in the product's configured list(s). To do this, simply enter the URL below and hit the Submit button. The category in the list where the URL was found will be returned. As an example, enter "http://www.superchicken.com" then hit the "Submit" button.

Check URL
Enter URL
URL: http://www.wavecrest.net
Category: Hardware and Software
Classification: Acceptable
URL found in: Standard Wavecrest URL List
Type of Categorization: Standard Wavecrest URL List
Configured List(s): Standard Wavecrest URL List v5.0 (1 Days)

7.4.4.4 Sample Reports

Sample Reports lets you quickly generate a sample Site Analysis report and a sample User Audit Detail report. These reports can help you become familiar with the "look and feel" of all of the product's reports. To view these sample reports, go to **Help – System Information** and click on the **Sample Reports** link. Then, click on the link for the report you want to see.

7.4.5 About

If you go to **Help – About** on the menu, you will get a description of the product, the version you are currently using, and the release date of the version you are using. It also includes a link to Wavecrest's Web site.

Appendix A: Groups and IDs

Introduction to "Groups and IDs"

General. "Groups and IDs" is a feature that is used to input and/or import users' ID information into the product for subsequent use in reporting and/or filtering processes. As discussed later, the Groups and IDs input/import process can be performed manually, automatically, or in some cases semi-automatically. Optionally, this feature can also be used to custom-group the IDs for more advanced usage.

Using the Product's Default Grouping Arrangements. You may not need or want to group your users in any particular way. For example, you may always want to see all users in high-level reports (e.g., Site Analysis), and/or you may want to apply policy settings uniformly to all users. The core grouping capability is designed to accommodate this universal approach. To implement, you do not need to take any special measures. All users are placed in the Ungrouped IDs group (a subgroup of Enterprise), and you simply designate Enterprise as the controlling group for all report formats and policy settings.

Using the Product with Customer-Specified Grouping Arrangements. Using the simplified universal approach discussed in the preceding section may not always be satisfactory. For example, management may want reports that only cover Web usage in particular departments or divisions. They may also want reports that cover personnel at specific locations, or they may want to see activity by all personnel who have a particular job classification. And, very importantly, they may want reports that show a single user's Web-access activity. In cases like these, user-grouping is essential.

NOTE: *Although grouping by department is the most popular approach, groups can be based on any characteristic or parameter that applies to the users in the workforce, e.g., job title, salary level, work location, etc. All groups must contain at least one user in order to be reported on.*

Augmenting the Core Grouping Arrangement. The Groups and IDs' core grouping capability can be easily augmented to accommodate a variety of requirements to monitor and/or control Web activity by groups or users. To take advantage of this capability, the overall user ID population must be subdivided into logically-structured groups. This will take the form of a hierarchical structure under Enterprise.

Customized User-Grouping. Wavecrest products were designed with customized user-grouping in mind. Our products enable you to input (or import) the user population. If desired, the user population can be subdivided into a single or multi-tiered hierarchical grouping structure. This capability lets you set up, apply and monitor different policies for different organizational units, i.e., divisions, departments, geographic areas, individual users, etc. It also lets you (a) use block-allow settings to govern Web access (Wavecrest's Cyblock products only), (b) vary report formats for different recipients and (c) restrict the distribution of group-level or individual user reports on a "need to know" basis. Such restriction increases managerial efficiency by segmenting the reports and providing recipients with only the information they actually need. It also prevents distribution of extraneous, undesired information, and it helps maintain users' privacy.

Planning Ahead. For customers that want to set up a customized grouping arrangement, we recommend that management or HR first design the grouping structure. This should be done before the network administrator begins the product setup process. That way, the administrator will have a clear blueprint of management's expectations when he or she starts the setup process. Designing the scheme is not difficult. There are many "models" that organizations can choose from. The most common grouping scheme is an "organization chart."

Multiple Approaches to the Management of Groups and IDs. Wavecrest products offer several alternative ways to set up and manage Groups and IDs. These include fully automated, partially automated and strictly manual approaches. These alternatives are discussed below.

Fully Automated Grouping Using Active Directory

Overview. For large ID populations, it is best to use automated processes to create groups and assign IDs. Wavecrest products provide this capability. Our products can import groups and IDs into the product from directories, databases, or spreadsheets on other servers. This capability can save extensive amounts of time and manual data entry. These savings can be realized if network users' information (e.g., employee name, employee number, organizational affiliation, network privileges, User ID, etc.) has already been organized and set up. For example, many organizations enter their computer users' unique identification and security data by department into a database in an Active Directory Server or a Domain Server. So long as each "database" record contains a unique user ID and a unique group (department) designator, the product can import the data en masse into Groups and IDs.

Active Directory. The use of "directory services" for network management purposes is common in larger organizations. Microsoft's Active Directory (AD) is a popular example.

How Wavecrest Products Interact with Active Directory

General. Wavecrest products' Groups and IDs import feature is optional functionality. It can be used in conjunction with Active Directory to automatically:

- * import relevant user information from the directory into the product's Groups and IDs section.
- * create a hierarchical Groups & IDs tree in the product.
- * assign the IDs to the appropriate groups in the tree.

Once you have Active Directory configuration(s) set up, the import feature can also be used to manually import IDs into the product immediately.

Caution. Using Active Directory to implement automated grouping is a powerful and efficient concept. However, for the concept to be successful, the directory must have fields that contain appropriate employee-related information needed by the product, e.g., user ID, full name (if used), immediate parent organization, etc. The fields must be structured in a logical, hierarchical "chain of command" manner, and all groups and subgroups (i.e., organizational units, or OUs) must have unique identifiers or labels. A unique identifier can be a department number or a department name – or any other type of designation – so long as there are no duplicates in the assigned database OU field. In large organizations where like functions in different locations may have the same name (e.g., "Sales" in Germany, "Sales" in England, etc.), the name should be augmented with a prefix or suffix to provide differentiation. For example, in this case, the two functions could be named "Ger.Sales" and "Eng.Sales." Assignment of unique department numbers to the various workgroups is also an effective solution. Most directories are already designed in this hierarchically structured manner for related reasons, e.g., group policy administration, network security administration, access control, etc. In such cases, the import feature will work smoothly and quickly.

For purposes of this discussion, we assume (a) the customer's Active Directory contains such information and (b) "groups" will represent departments, divisions, etc. in a hierarchical organization.

Figure 1 below is a hypothetical illustration of such information.

UserID	FullName	member of	member of	member of	member of
53801	Smith, John	Accounting	BuickMfg	Domestic	GeneralMotors
27498	Brown, Jane	Sales	ChevroletMfg	Domestic	GeneralMotors
41749	Doe, Oscar	QualityControl	CadillacMfg	Domestic	GeneralMotors
25998	Ray, Tom	Accounting	BuickMfg	International	GeneralMotors
37494	Gill, Ann	Production	ChevroletMfg	International	GeneralMotors
26487	Barr, Phil	Engineering	CadillacMfg	International	GeneralMotors

Figure 1. Example of Groups and IDs Information

Field Definitions. In this example, columns 1 and 2 are devoted to the individual employees, and columns 3 - 6 illustrate the departmental or organizational hierarchy. Column 3 is the lowest level in the hierarchy and is the employee's immediate parent organization. Columns 4 through 6 represent increasingly higher levels in the organizational hierarchy.

Hierarchical Considerations. Figure 1 illustrates a hypothetical multi-tier case involving the maximum number of hierarchical levels - four. Fewer columns can be used if fewer levels of hierarchy (or none at all) are needed.

For example, only three columns of data are mandatory for a two-level, IDs-only, no-full-names approach. One of the three columns is used for some form of user ID, one for the users' first-level parent(s), and one for second-level parents. Such an approach would use columns 1, 3 and 4 in Figure 1.

Only two fields are mandatory for a single-tier approach. These are the columns that provide user ID and immediate parent information. In Figure 1, these would be columns 1 and 3. However, two fields alone cannot support a multi-tier approach or provide for full names in reports.

Column Numbers and Names. Wavecrest products don't require that the columns be positioned or named exactly as shown in the example in Figure 1. As long as the proper types of information are provided, other left-to-right positioning schemes and column names will also work.

Use of Full Name. Although Figure 1 shows full names as well as user IDs, the use of full names is optional.

User ID Considerations. In some cases, the customer's directory will be one that's used in IT to control network access. MS Active Directory is a good example. In such cases, the directory's UserIDs will exactly match those that Wavecrest products find in the network logfiles. However, it's possible that a different type of LDAP-based directory, e.g., one used for HR or payroll purposes, may be more suitable for Web-use management purposes. If this is the case, it may identify employees differently than the access control directory does. For example, it may use employee numbers or Social Security numbers to identify employees. In such cases, the customer may need to insert another field in the "HR/Payroll" directory to duplicate the user IDs found in the access control directory.

Ensuring Compatibility Between the Product and the Directory. As mentioned above, in some cases for grouping purposes, the information in the directory will already be appropriate. That is, the directory will contain some form of user ID, and it may contain columns denoting the group to which each employee belongs and each group's progressively higher organizational levels. If it doesn't, the customer can easily correct the situation by inserting additional columns to fully accommodate the necessary information.

Implementing the Active Directory Import Process. Some or all of the employee-related information discussed above and illustrated in figure 1 can be imported into the product on an automatic or manual basis. In both cases, the Active Directory Setup wizard must first be used to configure your domain(s).

***NOTE:** A manual import will occur immediately upon clicking the link, placing the IDs into the groupings you specify first using the Active Directory Setup wizard. During that setup, you have the option whether or not to place any IDs into Ungrouped IDs. An automatic import will obtain Groups and IDs on a scheduled basis. If you chose to manage your Groups and IDs "outside the product," i.e., at the directory source, all Groups and IDs will be updated according to your directory source. However, if you chose to manage Groups and IDs "inside the product," only new IDs will be imported.*

Using the Product's Active Directory Setup Wizard. In order to import Active Directory users and groups, you must first use the Active Directory Setup wizard to configure your domain(s). After configuration is complete, Groups and IDs can be imported automatically into the product on a scheduled basis every 24 hours. Each time this occurs, the entire Groups and IDs "tree" in the product will be rebuilt according to the hierarchical structure reflected in your specified Active Directory configuration if you chose to manage your Groups and IDs "outside the product." However, if you chose to manage them "inside the product," only new users will be imported. For step-by-step instructions of the wizard, see Section 2.2.1 on Importing Groups and IDs from Active Directory.

Manual Import. When a manual import occurs, IDs will be imported into the product immediately. The process will import groups and IDs per your specified configuration. If you chose to manage your Groups and IDs "outside the product," all Groups and IDs will be updated according to the directory source. However, if you chose to manage Groups and IDs "inside the product," only new IDs will be imported.

Semi-automated Grouping Using a "Text File" Method

General. If Active Directory is not available, "Groups and IDs" information can be imported from any database or spreadsheet that contains the proper data, i.e., user ID and organizational assignment information. Personnel records in HR or payroll records in Finance may suffice. In brief, the data is exported from the source to an "import file" in the Wavecrest product.

Methodology for Exporting the Data into the Import File. Listed below are the basic steps for creating an import file and exporting the required data into it. The more complex steps are discussed in more detail later.

1. Select your data source (e.g., spreadsheet, database, table, etc.).
2. Ensure that the data source contains—as a minimum—a column for user ID, a column to accommodate an optional "Full Name" for each ID, and at least one "parent" column. If the parents have higher-level parents, additional columns will be needed. The columns do not need to be in any particular left-to-right order.
3. Export the source data to the Wavecrest product as an Excel spreadsheet. Each row (record) in the spreadsheet will represent one user ID.
4. Save the spreadsheet as text to a file named `.../wc/cf/db/import.cfg` for Cyfin or `/wc/cb/db/import.cfg` for CyBlock. This is the "import file."
5. Confirm that the file has been imported properly and contains the correct items of information. Also note the type of delimiter being used to separate the data items. The delimiter may be a comma or space, for example.
6. Restart the product. Once this is done the product's server automatically duplicates the imported group structure and assigns the IDs to the correct groups.

A Typical Import File. A typical import file will consist of the following columns:

- * **ID.** ID is the Login Name to a proxy server, firewall, caching appliance, etc. It can also be an IP Address or a domain name.
- * **Full Name (Optional).** This is the ID's full name, spelled out. This field/column is required, but if full names are not to be used, it can simply be left empty (no character spaces please). See examples below. If this field is used, then all reports will display the full name alongside the user's IP Address or login name.
- * **Group Name.** This is the name of the group (e.g., department) to which the ID is assigned, e.g., Sales, Engineering, Accounting, etc.
- * **Parent Groups 2, 3 and 4 (Optional).** These columns will contain the names of increasingly higher-level groups, if applicable.

NOTE: *These particular import file requirements are essentially the same as those discussed earlier for Active Directory.*

Configuring Wavecrest Products to Work with the Import File. After the import file is created, the administrator needs to ensure that the product engine is configured to work with the data in the file. That is, the administrator needs to "tell" the product (a) which piece of user information is in which column and (b) the type of delimiter being used. This is done in the **Advanced Settings - Groups and IDs - Import - Text File** screen. The process consists of a few simple data entries. See Section 2.2.2 for detailed instructions on importing your text file.

EXAMPLES of Import Files. Some examples of import files are shown below. Although we use the vertical pipe character as the delimiter in all of these examples, the delimiter can also be other acceptable characters, e.g., comma, space, etc.

1. The following example shows a typical group import file with login names, full names and group names.

```
smithj|Smith, Joe|Engineering
doej|Doe, John|Accounting
wilsonp|Wilson, Alvarez|Sales
```

2. The following example is Microsoft Proxy specific. Assume your organization has Microsoft domains set up for each department. For this example assume there are three departments, each with its own Microsoft domain. The Sales Department's domain is SALES, the Accounting Department's domain is ACCT, and the Engineering Department's domain is ENG. The following group import file would result in separate reports for each department or domain.

```
SALES*||Sales Department
ACCT*||Accounting Department
ENG*||Engineering Department
```

3. The following example illustrates a case in which full names are not used. Notice the two delimit-characters with nothing in between. This tells the product that there is no full name.

```
smithj||Engineering
doej||Accounting
wilsonp||Sales
```

4. The following example fits an organization that does not authenticate users at a Proxy Server or a Firewall, but has fixed IP Addresses and uses full names.

```
123.10.3.8|Meyers, Peter|Sales,New York
123.10.3.9|Ellen, Susan|Sales,California
9.2.3.8|Bene, Jorge|Sales,Brazil
```

5. The following example fits an organization that sub-classes an IP Address range for a region or district. In this case, Full Names are not used. Notice the two delimit-characters; this tells the product that there is no full name.

```
34.5.224.*||Washington Elementary School
34.5.225.*||Adams Middle School
34.5.226.*||Grover High School
```

6. The following example demonstrates how to set up a group import file for an organization that uses domain names for its workstations. In this case Full Names are not used. An example of full domains could be joe.eng.NY.company.com.

```
*.eng.NY.company.com||Engineering-New York
*.eng.CA.company.com||Engineering-California
*.drafting.company.com||Drafting-Corporate Headquarters
```

7. The following example could be used for an organization that uses a department number as part of a login name. For example, the Sales Department has a department number of 2001 and the Marketing Department has a department number of 694. An example of login names for the Sales Department could be joe2001 and jim2001; and the Marketing Department could have users sue694 and alice694.

```
*2001||Sales Department
*694||Marketing Department
```

8. Suppose an Internet Service Provider (ISP) manages Internet activity for many small businesses. The following example demonstrates an ISP configuration for delivering a grouped-report to each business.

```
45.23.190.*||Real Secure Systems  
*.hotpeppers.com||Hot Peppers and More  
123.45.48.*||Jacobs Manufacturing  
88.1.2.*||The Graphic Arts Center  
*.vbooks.com||Virtual Books, Inc.
```

Summary. As indicated earlier, once the Import File has been built and the administrator restarts the Wavecrest product server, it finds the file automatically and begins to use its information. As a result, the server automatically duplicates the imported group structure and assigns the IDs to the correct groups.

Manual Management of Groups and IDs

General. Manual management of Groups and IDs involves manually creating, moving, renaming, deleting, and updating groups and IDs.

In this case the product administrator first configures a hierarchical organizational tree in the product. This is done via screens found in the Advanced Settings/Groups and IDs Edit Links menu, which contains the options Add, Move, and Delete. Typically, although not necessarily, the groups in a hierarchical structure consist of the various departments and sub-departments within a company.

Configure and Populate the Groups. Once the design is complete, the administrator can configure it into the product and assign users to the various groups, e.g., departments. He or she can perform both of these tasks in the Advanced Settings/Groups and IDs screens by following the simple instructions for data entry. Once this is done, the administrator (or other authorized individual) can then request reports.

Using a (high-level) Site Analysis Report to Import IDs

General. Wavecrest's products can run high-level reports such as Site Analysis without previously inputting the IDs of the covered users. This approach automatically inputs IDs of users that were active during the specified time-frame of the requested report. This approach has the added benefit of producing a very useful high-level screening report while simultaneously entering applicable IDs into the product. All users imported in this manner are placed into Ungrouped IDs.

Cautionary Note. To run a detailed User Audit report on a specific ID or IP address, the covered user's ID must already be present within the product.

Methodology. Using the Reports/Manual menu, create and run a manual Site Analysis Report. As mentioned above, this approach automatically inputs IDs of users that were active during the specified time-frame of the requested report. The imported IDs will then remain in the product for subsequent use even after the Site Analysis report is closed out. **NOTE:** *If IDs have been previously inputted, running the Site Analysis report will only bring in "new" IDs. These will be placed in the Ungrouped IDs group from where they can be moved to other defined groups if such exist.*

Appendix B: Report Descriptions

1. Site Analysis Report

Features. This report depicts the same Web site visits three different ways:

- Total visits by classification (acceptable, unacceptable)
- Total visits by category (shopping, pornography, etc.)
- Total visits by user, per category (Note: Individual sites are not identified in this report.)

Benefits. The Site Analysis report looks at the same visits from three different perspectives, i.e., "acceptability", "category volume", and "user visits within categories". It can be used by all levels of management and by network administrators to perform audits and analyses of activity in either broad or focused areas.

2. Legal Liability Report

Features. This report contains only Legal Liability Web activity. Only visits to the Cults, Drugs, Gambling, Hate and Crime, Pornography, and Public Proxy categories are presented. Information is presented by category and by individual user. Individual sites are not separately identified.

Benefits. As indicated above, only "Legal Liability" Web-use is presented. This means that smaller, more focused reports are available to facilitate analyses, investigations and audits related to legal liability issues.

3. Network Information Report

Features. This report depicts total visits per category, hourly total visits and total kilobytes read. No individual IDs or sites are identified in this report. It also shows download times (see definition in appendix to report).

Benefits. This report is a powerful tool for Network Administrators. It serves as a valuable aid for managing bandwidth utilization.

4. Site Analysis Bandwidth Report

Features. Similar in structure to "Site Analysis" report, this report focuses on bandwidth consumption instead of visits. It breaks down bandwidth usage first by acceptability classification, then by category within each classification, and then by user within each category.

Benefits. This report provides IT personnel with a comprehensive, categorized picture of how and when Web-access is being used, and it does so while identifying the most active users in each category. This depiction is very helpful for managing bandwidth usage and advising management on corrective action measures.

5. Denied Visits Report

Features. By category, this report shows which users were denied access to Web sites or a page on a Web site. Individual users are identified but specific sites are not. Each attempt is displayed in the category attempted. "Denied" attempts for a Web page can signify the user may not be authorized to receive the page, the page may not have been found by the Web server or the page may have been blocked for access.

Benefits. If blocking at the proxy is used, this report can verify that it's working. It also indicates the number and type of blocked attempts. This report is a very useful supplementary tool for individual user audits.

6. Custom Categories Report

Features. This report depicts Web-use in Custom Categories only (if configured). That is, it shows which users visited which custom categories. It does not identify individual sites.

Benefits. This report provides very reliable Web-use information focused strictly on subjects of specific interest to the enterprise, specified by the enterprise itself. For example, management can use this information to determine if users are properly using particular Intranet sites, HR sites, supplier sites, customer sites, etc.

7. Acceptable Visit Report

Features. This report depicts Web-use activity only within categories classified or rated as "Acceptable." By category, it shows total number of visits made by individual users. Users are identified but individual sites are not.

Benefits. Management can quickly determine the amount of Acceptable activity. This can be done by individual category or on a summary basis for all Acceptable categories.

8. Unacceptable Visit Report

Features. This report depicts Unacceptable activity only. It does this in several ways. The report first provides an uncategorized total of visits to Unacceptable sites. It also provides a section, subdivided by category, that lists each individual visitor and the number of visits that each made within each category. The report depicts Web activity consisting of visits to sites in categories classified as "Unacceptable."

Benefits. This type of report supports "Management by Exception" techniques. That is, the report itself analyzes the activity and presents management with only the "unacceptable" visits.

9. Neutral Visit Report

Features. This report provides Web-use only for categories classified as "Neutral."

Benefits. Management can quickly determine the level and type of "Neutral" activity.

10. Category Audit Detail Report

Features. This report is similar to the "User Audit Detail" report. However, it focuses on a single category instead of a single user. That is, it provides a detailed analysis of all covered users' Web activity in a particular category that you select, e.g., pornography. All URLs, including sub-pages as well as home pages (sites), are sorted by user.

Benefits. This report is very useful for identifying the most active users (and the most heavily visited sites and pages) in a selected category. This makes it an excellent tool for conducting detailed audits and investigations of possible misuse of Web-access resources.

11. User Audit Summary Report

Features. This report lists all the Web sites visited by a single user during the reporting period. The report indicates each listed site's category and the number of visits made to it. A hyperlink to each site is provided to facilitate further review by management.

Benefits. Management is provided with reliable information to use in evaluating an individual user's Web activity.

12. Category Audit Summary Report

Features. This report is similar to the "User Audit Summary" report. However, instead of analyzing a particular user's activity, it provides a synopsized audit on a particular category. Web sites are NOT sorted by user in this report. Only URLs are displayed.

Benefits. This report is very useful for quick-look determination of whether or not Web-access abuse is taking place in a particular category, e.g., pornography. If the information tells you that a true problem exists, you can drill down deeper and pinpoint the source via a Category Audit Detail Report or a User Audit Detail Report.

13. User Audit Detail Report

Features. This report focuses on a single user. Every visit made by the user is listed separately in the main body of the report. Visits are listed chronologically by date and time. Information included for each visit consists of the site's category and full URL. A summary total of visits by category is also provided.

Benefits. Management has a concise but complete view of every URL the user has clicked. This information can be used for personnel appraisal purposes, usage audits, etc.

14. All User Summary Report

Features. This is a tabularized report that depicts each user's activity from a high-level "acceptability" perspective. For each user, this report shows the total number of visits that have been classified as "acceptable", "unacceptable", and "neutral." Extraneous hits (banners, ads, etc.) are not counted. All users are listed, not just the top 25. Individual sites visited are not shown.

Benefits. This reports presents management with a "quick-look" view of the number of acceptable and unacceptable visits made by each individual user.

15. Top Web Sites Report

Features. This report shows, by Web site, the number of visits made during the reporting period by the selected group. Each site's category is shown alongside the number of visits made. The list is sorted in descending numerical order by the number of visits; this enables quick determination of site "popularity." Individual user ID's are not shown on this report. Hyperlinks to all visited Web sites are provided to facilitate further analysis.

Benefits. This report "highlights" the Web sites that were visited most by the audited group during the reporting period.

16. Top Bandwidth Sites Report

Features. This report shows, by kilobytes, category and actual URL, the top bandwidth-consuming site visits made during the reporting period by the selected group. Each site's category is shown alongside the kilobyte consumption for the site. The list is sorted in descending numerical order by the highest bandwidth consumption; this enables quick determination of site effect on bandwidth. Individual user ID's are not shown on this report. Hyperlinks to all visited Web sites are provided to facilitate further analysis.

Benefits. This report gives you a quick view of the top Web sites consuming the most bandwidth in your network during the reporting period.

17. Top Non-Categorized Sites Report

Features. This report shows all unidentified hit activity, i.e., all URLs that were routed to the "Other" category. This is the only report that includes ALL activity, not just bona fide visits. Therefore, the report reflects all "extraneous" images, banners, ads, multimedia items, etc., as well as bona fide visits. For each URL listed, the report shows the number of hits and the full domain name. Individual user ID's are not shown. The list is sorted in descending numerical order by number of hits. Hyperlinks to all web sites are also provided.

Benefits. This report can be used by administrators to help identify any intranet sites that perhaps should be added to a "Company Intranet" custom category. A further benefit can be derived from this report by sending it to Sites@wavecrest.net for research by the Wavecrest staff. Upon receipt, the staff will identify, research and categorize the "Other" URL's and incorporate them into the Wavecrest® URL List. Inclusion of these URL's in the Wavecrest® URL List will greatly improve future reports.

18. Top Users Report

Features. This report lists the top users by visits, hits, and bytes read. If Abuse Thresholding is enabled, it will also show the user names that go over the threshold settings.

Benefits. This report can be used by administrators to get a quick, summarized look at Internet activity on the network. It lists the users with the highest volume of activity, be it acceptable or otherwise.

Appendix C: Glossary of Terms

Abuse. A level of Web use in a designated content category that is unacceptable to the customer's organization. Automatic abuse-detection is an optional feature within this product's reporting system. It is based on customer-specified criteria, i.e., a specified number of visits in a 24-hour period. If abuse-detection is chosen, the customer decides which categories to monitor and the levels (thresholds) at which usage becomes abusive. (See also **Abuse Thresholds**)

Abuse Thresholds. The levels at which Web usage becomes abusive within designated categories. Abuse Thresholds are set by the customer's organization on the basis of its Web access policy or guidelines. The numeric threshold refers to a specified number of visits allowable within a 24-hour day. Refer to Visit and Hit definitions to get a better understanding.

Acceptable Use Policy (AUP). A customer's set of guidelines and restrictions governing employees' access to the Internet and/or organizational intranets and extranets.

Access Accounts. Accounts that grant access to the product for functional or administrative purposes. Two types of accounts are available: Administrator and Operator. Administrators have full access to all functional and administrative features. Operators can only create and retrieve reports.

Attributes. Configurable "settings" and/or "features" within the product that perform specific Web policy support and report preference functions. (See also **Web Policy Support** and **Report Preferences**)

Category. A set of URLs with similar content. Examples include shopping, sports, pornography, entertainment, financial, etc.

Classification. An "appropriateness" rating assigned to a category, i.e., Acceptable, Unacceptable or Neutral. Customers specify the classifications.

Denied. A term that refers to a failed attempt to access a Web site. For the most part this occurs because the user is not authorized to access the site, i.e., his access has been "blocked." However, a "denied" indication can also be caused by technical anomalies, e.g., "page not found by server," etc.

Domain. A "name" that is part of a URL (Web page address). More readable and memorable than a numerical address. An example is www.amazon.com.

Download Time. Approximate or average time for a Web page to load in the browser, i.e., the time span between when a user clicks on a hyperlink and the page loads in the browser. As used in this product's reports, Download Time is derived by multiplying (a) the smallest average amount of time required to download a typical Web page by (b) the number of visits. Please note that it is not possible to calculate the amount of time a user was on-line or viewing a particular page. Our Download Time approach is intended to indicate the minimum amount of time the user was on the Web. This should not be the primary data point on which to establish abuse. We suggest you use the visit count (total visits); this is a more accurate indicator of abuse. (See definition of Visit for more detail.)

***NOTE:** The default used in the product for Download Time is set to 3 seconds. This can be changed if desired. Please contact Wavecrest Support for details.*

Enterprise. A term that denotes the total set of users covered by this product. If the total set is organized by the customer into a hierarchy of groups for more segmented or differentiated coverage, the term "enterprise" refers to the top level of the hierarchy.

Group. A collection of users who share a common characteristic. In one example, the users in a group all belong to a particular department of an organization or company. The department name or number is the common characteristic. Groups can be based on a number of different characteristics, such as: organizational assignment, work location, job classification, mission or project assignment, etc. A "group" can consist of many users, or it can consist of only one user. In this product, groups are assigned names for identification purposes; if the group is a single user, his or her ID is the group name.

***NOTE:** Any group created in the product must contain at least one user. If it does not, the group will not appear the next time the product is opened.*

Hit. A typical Web page is made up of many different elements (i.e., text, images, banner ads, audio, flash, etc.). When you click on a URL and a Web page is being loaded in your browser, each of those elements is downloaded separately. As a result, clicking on a single URL can generate multiple logfile entries, one for each element downloaded. Each of these "downloads" represents a "hit." On average, 70% of all hits are elements downloaded as a result of a user clicking on a hyperlink. Put another way, a hit count represents all elements downloaded during a user's session, but this has no direct correlation to the number of Web pages the user actually requested or visited. To present the most accurate representation of the level of human Web-use activity, this product distinguishes extraneous hits from actual clicks, i.e., visits. (Please refer to the definition of Visit for more information on this subject)

ID. A login name or IP address that this product uses to identify users.

Import Data. As used in current versions of this product and its documentation, the term Import Data refers to the product's optional-use "internal database" which, when enabled, can automatically retrieve and store logfile information in a more compressed and organized format. The chief advantage of this approach is greatly reduced report-generation time, compared to report-generation processes that read logfiles directly.

LDAP. Lightweight Directory Access Protocol (LDAP). An interoperability standard for deploying directory-based applications and solutions. As used in this product and its documentation, the term LDAP generally refers to the product's ability to import user ID information automatically and manually from an LDAP-based directory, e.g., Microsoft's Active Directory (AD).

List. Wavecrest URL List. Also sometimes referred to as a "control list," the Wavecrest URL list is an updatable categorized database of Web site URLs that is built into Wavecrest products. The product compares the URLs of visit attempts with the URLs in the list in order to categorize actual or attempted visits to Web sites. (See definition of Category)

Operator. A product user that has been granted a limited-access Operator account. Operators can create and retrieve Web-use reports but they cannot make administrative setup or configuration changes. Setup and configuration functions are limited to individuals that have been granted Administrator accounts.

Policy Settings. Modifiable settings that govern how this product is applied to users or groups of users and how it displays information in reports. Examples of these settings include: Category Classification, Abuse Thresholds, Display Categories, and Maximum IDs. Another example of a Policy Setting is the Block Categories setting in our filtering products. See also Report Preferences.

Report Preferences. Several customizable attributes within the product that help to streamline reports and dictate where they are sent or saved. Examples of these attributes include: Language, Full Name, Email Address, and Save Directory.

Ungrouped IDs. A hard-coded subfolder within the product's Groups and IDs feature. The subfolder is called the "Ungrouped IDs" group. It can be used to store user ID information. If the customer doesn't set up a customized user-grouping structure, all users can be placed in the Ungrouped IDs group and simply left there—in which case it serves as the main ID storage area. On the other hand, if the customer sets up his own user-grouping structure, Ungrouped IDs can be used as a holding area for user IDs until they can be moved into the proper groups.

The Ungrouped IDs group can be populated with IDs in several ways:

- **By Running Reports.** When high-level reports such as Site Analysis are run, IDs that are found in the logfiles for the requested time-frame are automatically assigned to Ungrouped IDs.
- **Via Automatic Imports.** Ungrouped IDs can be populated during automated ID import processes if the customer has not set up a grouping scheme. (If a grouping scheme has been created, the IDs are imported into their assigned specific groups.)
- **Manually.** The Ungrouped IDs group can be populated manually.

***NOTE:** Low-level reports such as User Audit Detail, which cover a single user, cannot be created unless the user's ID has been assigned to a group. Consequently, if the ID is not in a customer-created group, it must be in the Ungrouped IDs group.*

URL. Universal Resource Locator. The full address of a Web page. Includes protocol designator (e.g., http), domain name (e.g., www.amazon.com), and directory or file name (e.g., /index.html).

User. A computer user whose access to Internet and intranet Web sites is monitored by this product. For reporting and/or filtering purposes, the user's ID must be available to the product via logfiles or other means, e.g., importation from an LDAP-based directory or a manual entry process.

VIP Group. A built-in group that is used by administrators to exclude certain individuals (VIPs) from reports. When an ID is assigned to this group, his or her Web-use activity will not appear in reports.

Visit. The act of clicking on a URL or hyperlink to request that a Web page or other object be downloaded. The typical Web page contains many different elements that are downloaded separately. (Refer to Hit for complete understanding.) To gauge the level of Web-use activity, this product emphasizes Visit counts. Unlike Hits, "Visits" counts how many Web pages a user actually requested, not all the elements downloaded as a result of those requests. Put another way, a hit count represents all elements downloaded during a user's session, but this has no direct correlation to the number of Web pages the user actually visited or attempted to visit. In sum, to present the most accurate representation of the level of Web-use activity, this product distinguishes between extraneous hits and actual clicks. Furthermore, this product has an optional visit filter that is enabled by default.

Visit Filter. Feature which further differentiates between actual visits and hits, making for a more accurate depiction of visits. The visit filter is enabled by default, but it can be disabled upon request.

Web Policy. A term that is synonymous with AUP (Acceptable Use Policy). See also Web Policy Support.

Web Policy Support. Web policy support refers to how this product helps enforce an organization's AUP (Acceptable Use Policy). Some of the attributes that help to accomplish this include: Category Classification, Edit URLs, Name Custom and Abuse Thresholds.

***NOTE:** An additional example in our filtering products is the Block Categories setting.*

XML. *Extensible Markup Language.* A widely used interoperability standard. As used in earlier versions of this product and its documentation, the term XML generally refers to the product's optional-use "Data Manager " which, when enabled, can automatically retrieve and store logfile information in XML format. The chief advantage of this approach is greatly reduced report-generation time, compared to report-generation processes that read logfiles directly.



Cyfin® Proxy
Build Date: 28 Mar 2008

Wavecrest Computing
2006 Vernon Place
Melbourne, FL 32901
Toll-free: 877-442-9346
Voice: 321-953-5351
Fax: 321-953-5350

www.wavecrest.net